



国机重工集团国际装备有限公司

SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.

Add: No. 898 West Huang He Road, Changzhou city, Jiangsu Province, China

PC: 213136

Tel: 86-519-86781288 86752400

Fax: 86-519-86781387

Http://www.sinomachiglobal.com

E-mail: sales@changlin.com.cn service@changlin.com.cn



ZG026S-ZG027S

Mini Excavator



Engine Model: YANMAR 3TNV80F
Gross Power: 14.6kW/2400rpm
Operating Weight: 2700kg/2800kg

High Performance in a Compact Design

WALK-AROUND

LED LIGHT



HIGH SAFETY FOUR POST CANOPY (CAB OPTIONAL)



AUXILIARY PIPING



The excavator standard comes with one set of auxiliary pipelines, and can also be equipped with a second set of auxiliary pipelines as optional to meet the requirements of various attachments.

ENGINE



Equipped with Japan Yanmar engine, meeting emission standards for Euro V, North America EPA 4, and national IV non-road mobile machinery, which is energy saving and environmental protection with strong power. The load sensing system ensures fast response, superior control and high efficiency.

OFFSET BOOM



TELESCOPIC TRACK



The travel motor has an automatic speed control function, so the travel efficiency is higher.




HIGH PERFORMANCE IN TIGHT CONDITIONS

A COMPACT MODEL WITH HIGH PERFORMANCE

ZG026S-ZG027S with OPG/TOPS canopy (cab) provides excellent visibility, stability, optimal comfort, and safety. For tough jobs in tight corners that demand precision control and state-of-the-art performance. ZG026S-ZG027S is ready to work, offering following advanced features: Zero-tail swing, hydraulic retractable undercarriage, boom swing, foldable dozer blade. Featuring high reliability, low operating cost, and superior efficiency, and you've got the ideal mini for a wide range of modern jobs.

Zero-tail Swing

With zero-tail swing, even the tightest space becomes an efficient work place. The tail always stays within the width of the tracks (when extended) and lets you turn the canopy throughout its 360-degree turning radius with complete confidence and safety. Starting point by developing our zero-tail ZG026S-ZG027S, balance, fast and smooth operation was our main target. It results in a compact excavator with excellent balance and comes to its full potential in urban environments, landscaping, and small demolition in and outside buildings.

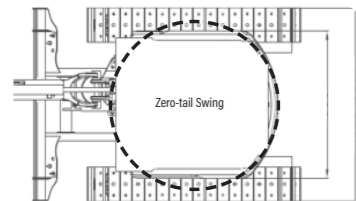

Boom Swing

The left and right boom swing angle supports complex operating conditions like parallel wall digging or working in narrow spaces.

Auxiliary piping

Auxiliary piping is standard. A second set of auxiliary piping is also available as an option. It can meet the configuration of various attachments.



OPERATIONAL COMFORT



LARGE OPERATOR ENVIRONMENT WITH ERGONOMIC CONTROL LAYOUT

The ZG026S-ZG027S provides an uncompromised operator environment – which, together with excellent visibility, provides unmatched operator comfort and safety. This machine is built around the operator – providing optimal ergonomics for operators of all sizes. ZG027S is equipped with cab with large space, wide view, reasonable arrangement of manipulation devices, convenient and comfortable operation.



The 7-inch intelligent touch screen is used to integrate rich functions. And fuller and more intelligent human-computer interaction is also realized to enhance the operating experience.



The dashboard position is more ergonomically designed to make it more convenient and comfortable to use.

EASY ACCESS FOR MAINTENANCE

EASY SERVICE ACCESS

ZG026S-ZG027S is developed with taking particular attention to ease of service access. With a single access point for the daily maintenance of all main components, fuel level gauge and refuelling through the lockable cap.



The ZG026S-ZG027S is designed for lower maintenance cost with longer service intervals- resulting in more machine availability on-site. Meanwhile, skilled technicians are available to provide extra support when needed.

OPTIONAL ATTACHMENT

