


TECHNICAL PARAMETERS

		Data
Engine	Emission Standard	Euro 5/EPA
	Make	Kubota
	Model	V5009
	Power /Rotation speed	155kw@2200 rpm
	Number of cylinder	4
TRACK SYSTEM	Max. Travel speed	2.4/4.3 km/h
	Width of track shoe	600 mm
	Upper roller per side	2
	Bottom roller per side	9
PERFORMANCE PARAMETER	Standard Bucket capacity	1.1 m³
	Swing speed	11 rpm
	Max. Grade ability	30°
	Max. Bucket digging force	140 KN
	Max. Arm digging force	99 KN
	Hydraulic system pressure	32 Mpa
	Machine weight	22500 kg
	Fuel tank	350 L
MACHINE SIZE	Hydraulic oil tank	220 L
	Overall dimension (L*W*H)	9590*2980*3060 mm
	Height of cabin	3060 mm
	Track length on ground	3655 mm
	Track gauge	2380 mm
	Min. Ground clearance	470 mm
	Swing radius at tail	2880 mm
WORKING RANGE	Max. Digging height	9410 mm
	Max. Dumping height	6730 mm
	Max. Digging depth	6480 mm
	Max. Vertical digging depth	5925 mm
	Max. Digging radius	9850 mm
	Min. swing radius	3555 mm

MAIN SPECIFICATIONS

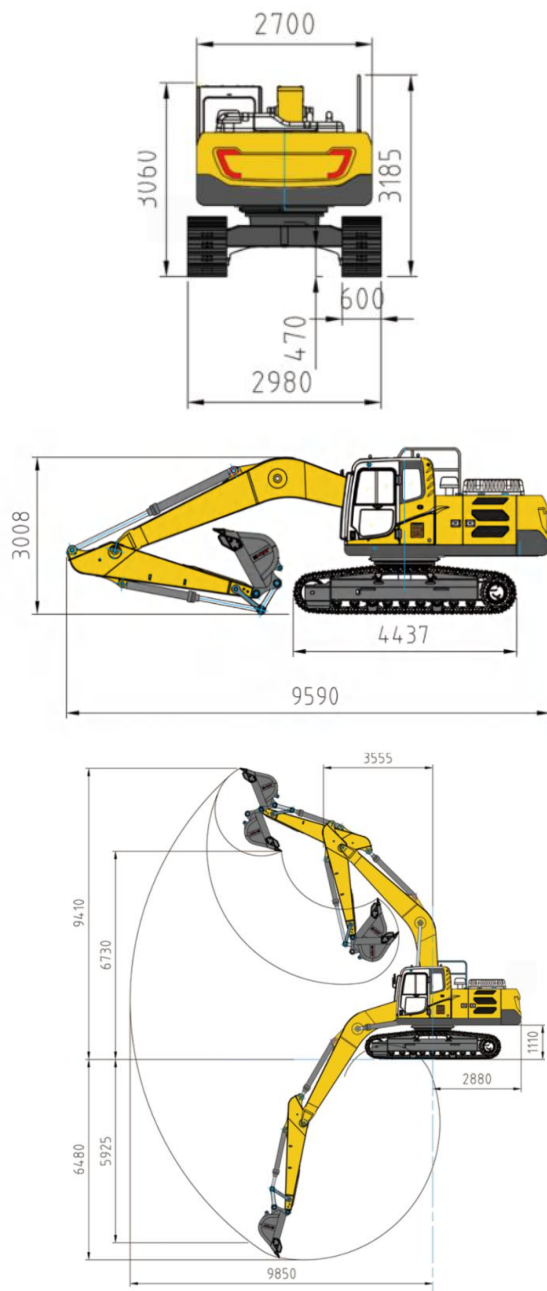

ZG230J

SINOMACH-HI International Equipment Co.,Ltd.

额定功率 (Rated Power): 155/2200 kw/rpm
操作重量(Operating Weight):22500Kg

斗容容量 (Bucker capacity):1.1m³

EXCAVATOR

挖掘机



国机重工集团国际装备有限公司
SINOMACH-HI INTERNATIONAL EQUIPMENT CO., LTD.
Add:No.898 West Huang He Road, Changzhou city, Jiangsu Province, China
PC:213136
Tel:86-519-86781288 86752400
Fax:86-519-86781387
[Https://www.cn-changlin.com/](https://www.cn-changlin.com/)
E-mail:sales2@changlin.com.cn



V.24091