工业地板

INDUSTRIAL FLOOR



适用场所:该产品适用于各类工业厂房,电子车间,医药净化车间,化学实验中心,仓储中心,大型超市,商场,博物馆,各类新能源工厂,电池工厂,地下停车场等。

Application: The product is suitable for all kinds of industrial plants, electronic workshops, medical purification workshops, chemical experiment centers, storage centers, large supermarkets, shopping malls, museums, all kinds of new energy factories, battery factories, underground parking lots and so on.

工业地板 Industrial vinyl flooring Size:1.4/1.6/1.8/2.0mmx2mx20m




工业地板 Industrial vinyl flooring Size:1.4/1.6/1.8/2.0mmx2mx20m

抗冻耐候工业地板 Antifreezing & Weather-proof industrial floor



G-2540

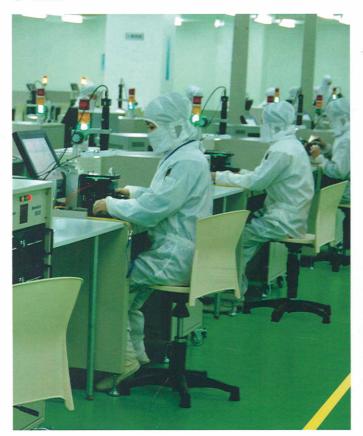



防静电工业地板Anti-static industrial floor



G-2529

工业地板 Industrial vinyl flooring

产品特点 PRODUCT FEATURE:



在重物的冲击下有良好的弹性恢复能力,具有很强的抗冲击性,其特殊配方及高致密结构,可承受叉 车来回碾压。

抗重载

Heavy-load resistance

It has good elastic recovery ability under the impact of heavy objects, and has strong impact resistance. Its special formula and high dense structure can withstand the rolling of forklift trucks.



本产品采用全新料,全新配方生产,无毒无味,能 有效防止细菌寄生,可循环利用,绿色环保。

Green and antibacterial

绿色环 保抗菌 This product uses new materials, new formula production, non-toxic and tasteless, can effectively prevent bacteria parasitic, recyclable, green environmental protection.



耐强酸碱

本产品具有极强的耐酸碱腐蚀性能,可以承受腐蚀 环境的考验。

Heavy corrosion, strong acid and alkali resistance

This product has a strong acid and alkali corrosion resistance, can withstand the test of corrosive environment.



工业地板通过国家防火阻燃标准B1级,不会助燃, 离火自熄,真正的防火阻燃。

Fire and flame retardant

防火阻燃

Industrial floor through the national fire retardant standard B1 level, will not ignite, from the fire self–extinguishing, real fire retardant.



工业地板通过特殊的配方和结构设计,可使其具有 优秀的抗静电性能,可适用于各种防静电环境,比 如电子厂房车间。

抗静申

Anti-static

Industrial floor through special formula and structural design, can make it have excellent anti-static performance, can be applied to a variety of anti-static environment, such as electronic workshop.



超强耐磨和吸音降噪

采用最新研发配方生产的耐磨层,具有最高致密性分子结构,4倍于普通PVC地板的耐磨性,(耐磨性测试记过高达21500转)。同时具有普通地面材料无法比拟的吸音效果,脚感舒适。

Super wear-resistant and sound absorption and noise reduction

The wear-resistant layer produced with the latest formula has the highest dense molecular structure and 4 times the wear resistance of ordinary PVC flooring (wear resistance test score up to 21500 RPM). At the same time, it has the sound-absorbing effect that ordinary ground materials cannot match, and the feet feel comfortable.



工业地板表面采用特殊防污处理,可有效防止渗透性污染,如油渍、油墨、碘酒等。

Highly oil and stain resistant

高度防 油防污 Industrial floor surface with special anti-fouling reatment, can effectively prevent osmotic pollution, such as oil stains, ink, iodine and so on.



特殊的工艺使其各项物理性能指标成倍优于其它地 面材料,拥有超长使用寿命。

Long service life

使用 寿命+ The special process makes its various physical properties exponentially better than other ground materials, and has a long service life.



特殊的立体玻纤结构,使其有优越的尺寸稳定性, 能够使用于温差较大的场所。

Good dimensional stability

尺寸稳 定性好 The special three–dimensional glass fiber structure makes it have superior dimensional stability and can be used in places with large temperature differences.



特殊的材质使其遇水发涩,有极好的防滑性能。

Good slip resistance

防海性好

The special material makes it astringent in water and has excellent anti-slip performance.



产品施工简单快捷,可在不影响企业正常生产情况 下进行安装及维修。对损坏的局部区域可以重新翻 修,施工完成马上可以使用。

易安装 易维修 可翻新 修复

Easy to install, easy to repair, and retrofit

The product construction is simple and fast, and can be installed and maintained without affecting the normal production of enterprises. The damaged area can be rebuilt. It can be used as soon as construction is completed.



打破传统地板漆色彩与表面单一的局限,本产品不仅色彩多样,纹路逼真美观,大幅度提升了场地的档次,同时接受图案和颜色的定制。

花色多样

Variety Of Colors

Different Like The Single Color Of Traditional Painted Floor, This Product Is Not Only Diverse In Colors, But Also Realistic And Beautiful In Texture, Which Greatly Improves The Aesthetics Of The Venue, Also Customized Patterns And Colors Are Accepted.

产品参数

Product parameters

技术参数/Technical Date	标准/standard	单位/Unit	监测结果/test Results
总厚度 / Total Thickness	EN428	毫米mm	1.4/1.6/1.8/2.0mm
耐磨层厚度/Wear Layer Thickness	EN429	毫米mm	0.7mm/1.3mm
卷宽 / Roll Width	EN426	米m	2.0m
卷长 / Roll Length	EN426	米m	20m
耐磨等级 / Abrasion Group	EN660	-	T级, Group
防火性能 / Fire-proof Performance	GB8624-2006	等级class	Bf1-S1, T0级
色牢度 / Colour Fastness	EN433	度数rating	≥6
抗化学性能/ Anti-chemical Performance	ENISO 105-802		良好Fine
尺寸稳定性能 / Dimension Stability	EN434	-	=0.02%
耐磨性,转 / Abrasion Resistance, rpm	GB/T 17657-2013		≥21500转
抗静电性能 / Antistatic Performance	ASTMF 150		106–109 Ω
防污性能 / Anti-lodine Performance	ASTMF 925	-	优良Great
有害物质限量 / Limit of harmful substances	GB 18586-2001		合格Qualified
防滑性能 / Non-skid Property	EN 13893	-	R9
耐水性 / Resistance To Water	GB/T 1733-1993	-	优秀
凹陷残余 / Repression Remains	ENISO24343-1:2012		0.00

国家建筑材料测试中心检验报告


National building materials testing center inspection report

检验项目/Inspection item		标准要求/Standard	检验结果/Inspection result	单项结论/Conclusion
氯乙烯单位/Vinyl chloride unit (mg/kg)		€5	未检出/Not detected	合格/Pass
重金属/Heavy metal(mg/m²)	可溶性铅/Soluble lead	≤20	未检出/Not detected	合格/Pass
	可溶性镉/Soluble cadmium	≤20	未检出/Not detected	合格/Pass
挥发物/VOC(g/m²)		≤10	8.1	合格/Pass

国家防火建筑材料质量监督检验中心检验报告

National fire protection building materials quality supervision and inspection center inspection report

检验项目/Inspection item	检验方法/Inspection method	技术指标/Technique data		检验结果/Inspection result	结论/Conclusion
燃烧长度 The length of the combustion (mm)	GB/T 8626-2007	Bf1	=150	40	合格/Pass
临界辐射通量 critical radiant flux(kw/m²)	GB/T 11785-2005	Bf2	=8.0	9.2	合格/Pass
产烟量/Smoke production (%min)	GB/T 11785-2005	S1	=750	170	合格/Pass
产烟毒性/Smoke toxicity(grade)	GB/T 20285-2006	ТО	达到/Up to ZAI	ZAI	合格/Pass

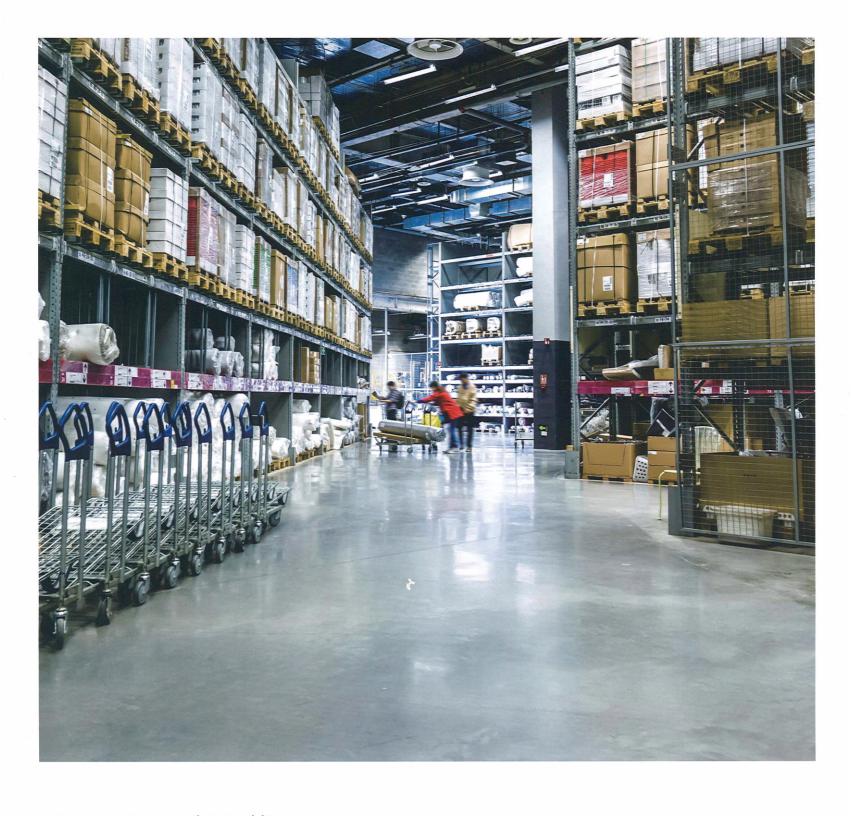

Applications 应用区域

适用场所:该产品适用于各类工业厂房,电子车间,医药净化车间,化学实验中心,仓储 中心,大型超市,商场,博物馆,各类新能源工厂,电池工厂,地下停车场等。

Application: The product is suitable for all kinds of industrial plants, electronic workshops, medical purification workshops, chemical experiment centers, storage centers, large supermarkets, shopping malls, museums, all kinds of new energy factories, battery factories, underground parking lots and so on.













