




雅玉龙系列

NEW YAYUDRAGON SERIES



Hospital/ School/ Office Hoel/
Nursing homes/ Retail
Factory Sports/ Gymnasium

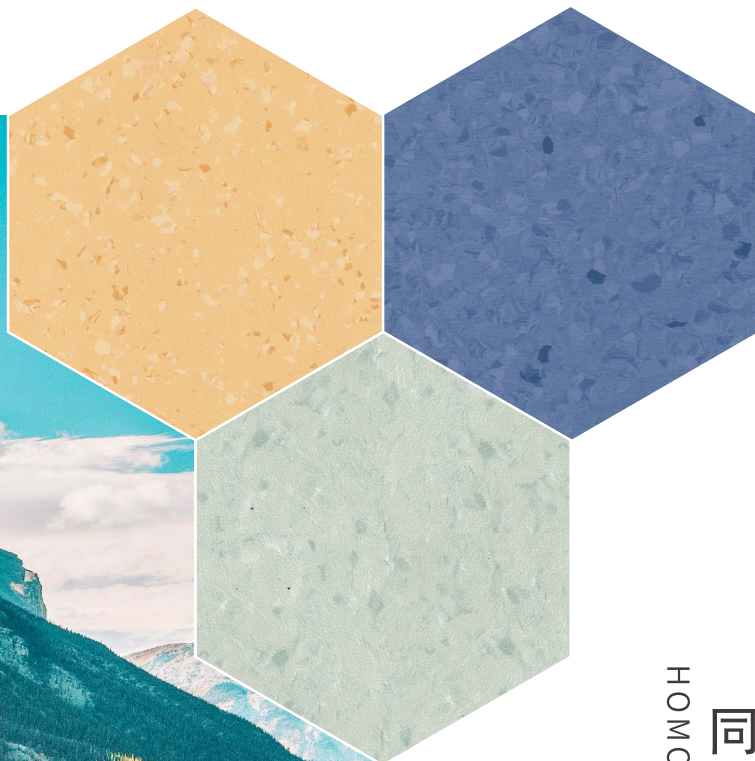

同质透心卷材地板
HOMOGENEOUS RESILIENT FLOORING




APN 030237



APN 030208




APN 030325

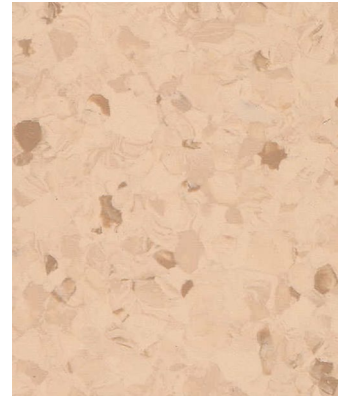

APN 030104



APN 030317

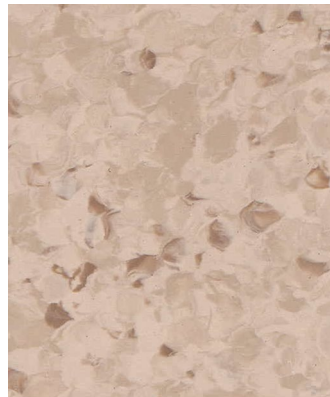


APN 030121




APN 030319




APN 030438

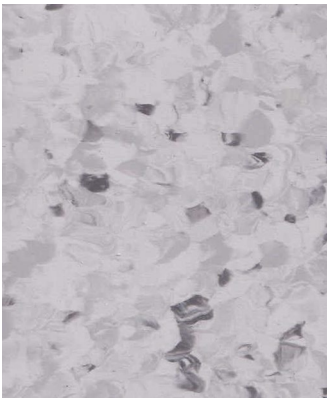

APN 030011

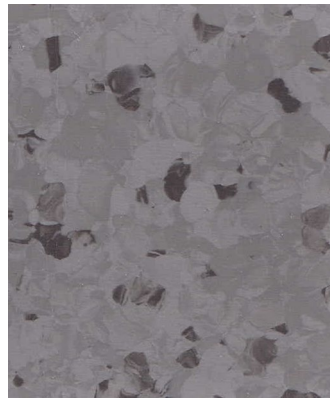


APN 030012

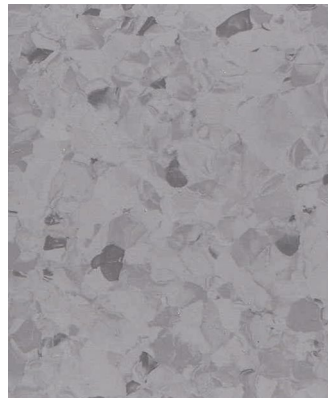


APN 030034




APN 030506

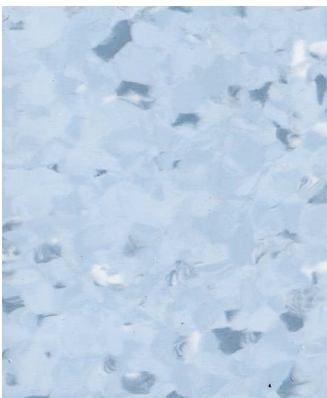

APN 030613

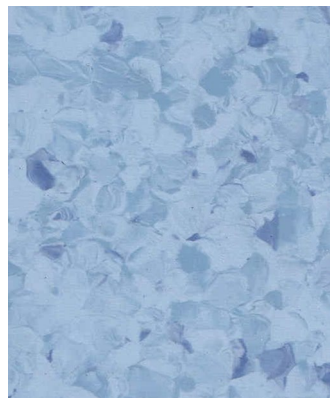

APN 030609

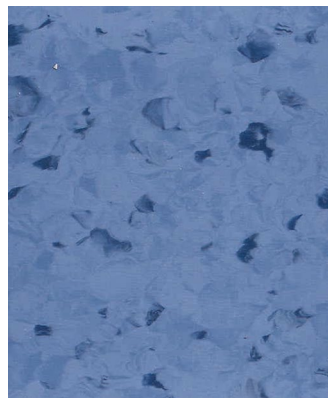


APN 030623




APN 030632




APN 705303




APN 705305




APN 705341



APN 705354



APN 705324




APN 705332




APN 705385




APN 705375



APN 705363




APN 705347




APN 705306




APN 705366




APN 705312




APN 705310




APN 705329




APN 705340




APN 705320



APN 705330



APN 705350



APN 705360



APN 40002



APN 40201



APN 40102




APN 40103




APN 40203




APN 40316




APN 40501




APN 40506




APN 40001




APN 40003



APN 40004




APN 40005




APN 40602




APN 40603




APN 40605



APN 40604




APN 50015




APN 50004




APN 50021



APN 50020



APN 50019




APN 50007




APN 50006



APN 50022




APN 50002




APN 50003



APN 50016




APN 50017




APN 50001




APN 50012




APN 50018




APN 50024



APN 50009



APN 50025



APN 50008



APN 50010

FEWER VOC,S BETTER INDOOR AIR QUALITY

更低的VOC排放，更好的室内空气质量



COMPOSITION

成分100%符合REACH法规

- FREE of formaldehyd
不含甲醛
- FREE of heavy metals
不含重金属
- FREE of solvent
不含溶剂



RECYCLED CONTENT

成份环保

- 100%REACH compliant recycle content
100%符合REACH规定



RECYCLABLE

可循环

- 100% recyclable product
产品100%可回收



INDOOR AIR QUALITY

室内空气质量

- TVOC emissions 100 times lower than norm requirements(TVOC <math>< 10 \mu\text{g}/\text{m}^3</math> after 28 days)
TVOC排放低于标准100倍 (28天后TVOC排放<math>< 10 \mu\text{g}/\text{m}^3</math>)
- No formaldehyde emission
不含甲醛



WELLNESS


健康

- Antibacterial activity (inhibits growth>99%)
有效抑菌(抑菌率>99%)



秉承：不含DOP,重金属、VOC含量极低。

PUR protect聚氨酯紫外线光固化特殊维护处理，高强耐磨，耐碘酒，可免打蜡，出色的洁净性能

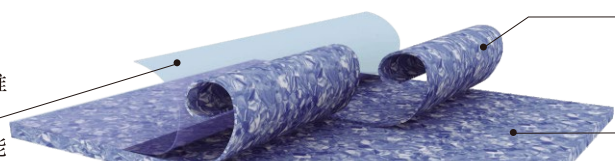

同质透心纹理，视觉立体感强

整体密实，抗压能力超强

微小网格状背面设计
极大增加接触面,粘合更牢固

增塑剂采用DOTP，环保性能优秀

无方向纹理设计



INSTALLATION 安装

installation should be carried out in accordance with local standards. subfloor to be smooth, hard, clean and dry prior to laying. where applicable the subfloor must incorporate an effective damp proof membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C all seams must be heat welded using matching rod.

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料放置在18-24°C室内适应环境。所有接缝口应选用之配套焊条热焊处理。





MAINTENANCE 维护

No emulsion dressing is required. Maintenance should be carried regularly to retain the appearance and durability of the floor. the floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

铺装之后可以不必打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

! Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. 橡胶会在乙烯基地板上留下无法擦拭的污点：请勿在PVC地板上使用橡胶背衬，用PVC或者聚酰胺（尼龙）材质替代橡胶家具背衬。

技术参数 TECHNICAL SPECIFICATION

Characteristics 特点	Standard 标准	Unit 单位	Result 数值
• Type of flooring 材料类型 • Material 材质	ISO 10581-EN 649		Homogeneous Sheet 同质透心卷材 Polyvinyl chloride 聚氯乙烯树脂
Safety criteria 安全要求			
• Flammability 防火	GB 8624-2012	class 等级	B1
• Flammability 防火	EN 13501-1	class 等级	Bf1
• Slip resistance 防滑	DIN 51130	group 组	R9
• Dynamic coefficient of friction 动态摩擦系数	EN 13893	class 等级	DS
Performance behaviour 性能数据			
• Sheet width 卷宽	ISO 24341-EN 426	m 米	2
• Sheet length 卷长	ISO 24341-EN 426	m 米	20/15
• Overall thickness 总厚度	ISO 24346-EN 428	mm 毫米	2.0/3.0
• Total weight 总重量	ISO 23997-EN 430	kg/m ² 千克 / 平米	2.85/4.7
• Wear resistance 耐磨度	EN 649	group 组	T
• Binder content 粘合剂含量	EN ISO10581	Type	Type1
• Residual indentation 残余凹陷	ISO 24343-1-EN433	mm 毫米	0.03
• Dimensional stability 尺寸稳定性	ISO 23999-EN 434	-	X 横向: <0.4% Y 纵向: <0.4%
• Color fastness 色牢度	ISO 105-B02	rating 度数	≥6
• Resistance to staining 抗污性能	EN 423		No Stain 0 无污染
• Surface treatment 表面处理		-	PUR处理
Classification 分类			
• Domestic 家用	ISO 10874-EN 685	class 等级	23 heavy duty 重承载
• Commercial 商用	ISO 10874-EN 685	class 等级	34 very heavy duty 极重承载
• Industrial 工业	ISO 10874-EN 685	class 等级	43 heavy duty 重承载
Additional property 附加特性			
• Castor Chair 椅轮滚动  ✓		• Antistatic Behaviour 静电负荷  ✓	
• Underfloor Heating 基层遇热  ✓		• Chemical Resistance 抗酸碱能力  ✓	



DOP检测值
未检出



儿童玩具标准
重金属未检出



甲醛释放量
检测值为0

REACH

欧盟高危致癌物
未检出

TVOC

释放量28天检测
欧标1/200