
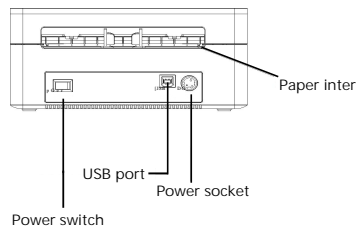


Thermal Printer

User Manual

Size: 185*85*85mm
Weight: 722g

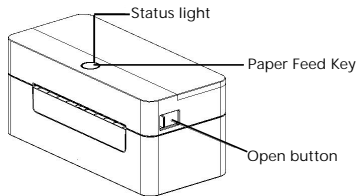


Please scan QR code to download CD Files

Download Link:
<http://www.barcoderead.net/printer/9260.zip>



1. Connect to the power


- (1) Place the printer on a stable surface and make sure the power is off.
- (2) Connect the two ends of the USB data cable to the printer and the host computer respectively.
- (3) Plug the power cord into both the printer and the power socket.

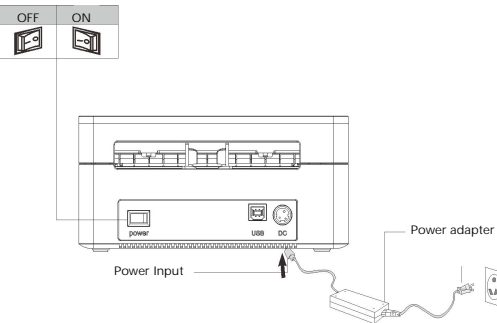

Note:
Please ensure the printer is powered off before connect to the power.

2. Loading Media

- (1) Push the open button to open the cover.
- (2) Put the media to the sheetbox.
- (3) Guide the media through the paper guide, pull over the roll.
- (4) Close the cover carefully.

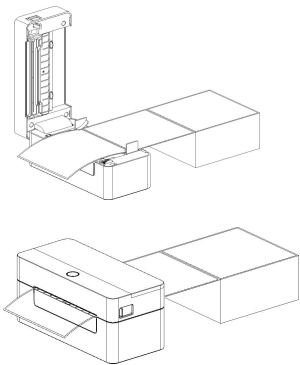

Note:
Please make sure the cover is firmly closed.

Instruction of LED and Buttons :

LED Color	Description
Blue(fixed)	Press the power button about 3S,Power on, Standby
Blue(blinking)	Downloading data or the printer is paused.
Purple	The printer is formatting the data.
Red(fixed)	Printer is in head opened or cutter error status
Red(blinking)	Printing error occurs,out of paper,paper jam,etc.

Paper feeding:

When the printer is stand by(LED blue fixed),the installed paper will move forward one unit if feed button is pressed once.

Printer self-test page:

1. Turn off the printer.
2. Turn on the printer while holding down the feed button.
3. When the indicator blinks red after the first purple,release the feedbutton.
- Indicator color cycle mode: Purple Blue Red(blink 5times) Purple (blink 5times) Blue(blink 5times) Blue(fixed)
4. The sensor will calibrate the label paper and the printer will print out the self-test value,and finally enter the debugging mode and print out the value.
5. Turn the printer off and on again to return the printer to the normal printing mode.


3.Driver Installation for Windows by USB Connection

Note: A printing software is required to be used with this driver
Each machine has a factory equipped with a CD, open the CD and find the label printer driver - WINDOWS, then click it to install the driver.


1. Double click "4BARCODE" and choose "I accept the terms in the license agreement", click " Next", as below picture :





2. leave "Installation Directory" as default , go "Next" :

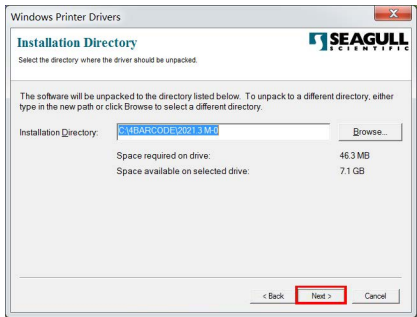


3. Choose " Run Driver Wizard after unpacking drivers " and go " Next "

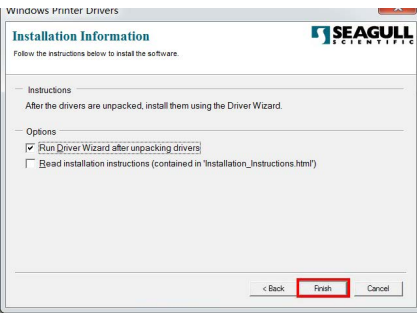



4. Choose "Install printer drivers", click "Next" as below picture :

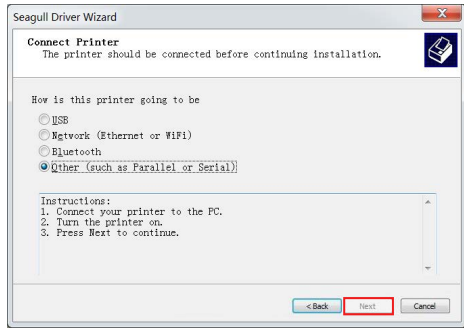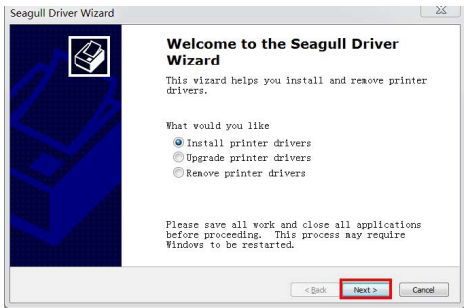


5. After installing the printer drivers , choose the "Other(such as a parallel or serial)", go"Next"; choose the model name "4Barcode 4B-2054N", go "Next"; this sheet no need to operate, go "Next" directly.

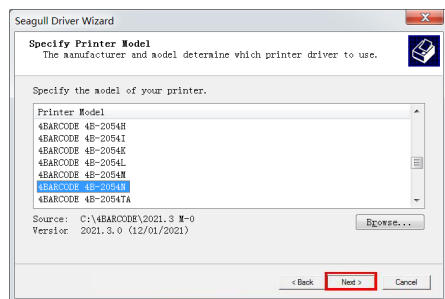

8

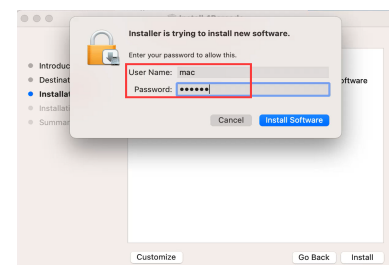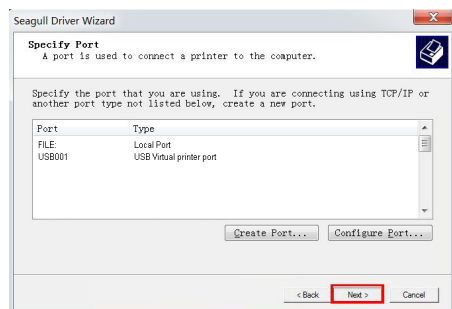


3. The driver installation was successful, then click the "Close" button

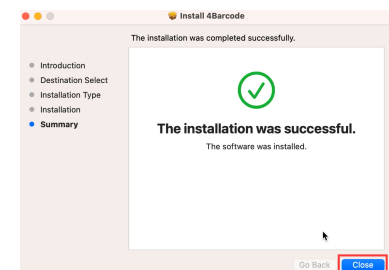



4. Please open "System Preferences", click "Printer & Scanners", click +button to add printer. if printer is connected to Mac, driver model will install automatically.(Model: 4B-2054N)

12

6. Default name of printer is "4BARCODE4B-2054N", Choose "Use" this printer as the default printer". click "Next" , Completing driver installation , click "Finish" as below picture:

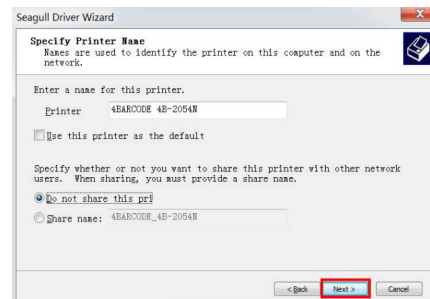


9

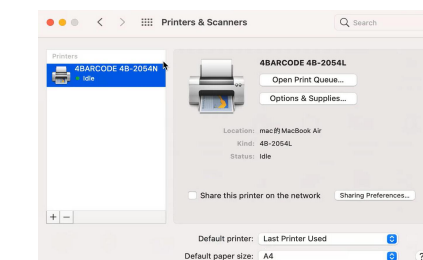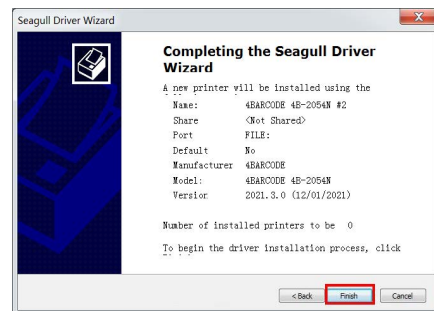

5. Label Editing Software with Android System via Bluetooth Connection

- 1.Turn on the power of printer.
- 2.Turn on the bluetooth, find the POS-9260 and type the pin "0000"



3. Open the label editing software App, please scan below QR code to download the APP.



Android editing software
Install Password:0000




4Barcode

13

7. Complete the installation of driver "4BARCODE4B-2054N", click "Close" , As below picture:





8. Click the "Printer properties" and then Click "Print a test page" and the printer will print a test page.




10

- 4.Click the printer symbol.
- 5.Choose the "Bluetooth Connection".
- 6.Choose the "POS-9260".

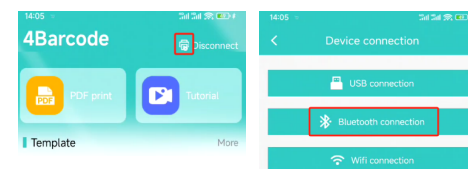

7.Connection Successful




14


4. Driver Installation for Mac by USB Connection

Open the CD and find the label printer Drive-MACOS, then click it to install the drive.

1. Double click "4Barcode.pkg", and choose "OK", click "Continue" , as below picture :

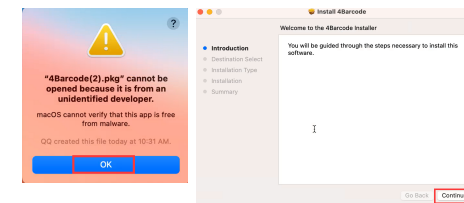


2. Please click the "Install" button, enter your Mac password



11

6. Label Editing Software with IOS via Bluetooth Connection

- 1.Turn on the power of printer.
- 2.Turn on the bluetooth.



- 3.Open the label editing software App, please scan below QR code to download the APP.




IOS editing software



4Barcode

- 4.Click the printer symbol.
- 5.Choose the "POS-9260".

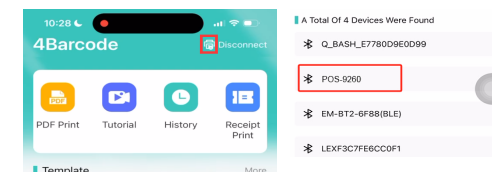

6.Bluetooth Connect Successful



15