


## 5 port 10/100Base-T(X) Ethernet switch

### JHA-SWF05

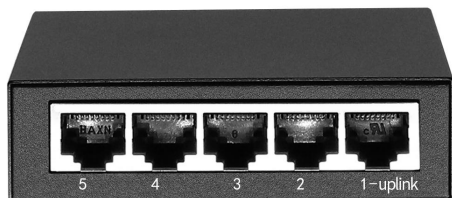

### Product Overview

This 100M Fast Ethernet switch JHA-SWF05 is a desktop switch specially designed by our company for the security monitoring industry. Provide 5 10/100M self-adaptive ports, support full-duplex working mode, automatically identify parallel cables and crossover cables, plug and play, without any settings, quickly help you expand high-speed network, and realize shared Internet access. Easy to install and easy to stabilize. Made of alloy steel, the mini has an exquisite appearance, is sturdy and durable, and has strong heat dissipation performance, showing its quality. Fully compatible with the needs of major brands of network cameras in the security industry and data exchange and transmission.

### Product Feature

- 5 \*10/100Mbps adaptive RJ45 ports, support automatic flip;
- Comply with IEEE802.3, IEEE802.3u, IEEE802.3X standards;
- Provide 5\* dynamic LED indicators to display the connection status in real time;
- Support 10/100M full-duplex and half-duplex auto-negotiation;
- Adopt store-and-forward mode;
- Support MAC address self-learning and updating;
- Support network surveillance camera access;
- Support plug and play, no configuration required;
- Support desktop/wall installation;

- Low power consumption design, the maximum power consumption of the whole machine is 1.6W, energy saving and environmental protection.

## Product Specification

<b>Model</b>	<b>JHA-SWF05</b>
<b>Product</b>	<b>5 Port Fast Ethernet Switch</b>
Fixed Port	5*10/100Base-TX RJ45 port(Data)
Network Protocol	IEEE 802.3 IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX
Port Specification	10/100BaseT (X) automatic detection, full/half duplex MDI/MDI-X adaptive
Transmission Mode	Store and Forward (full wirespeed)
bandwidth	1Gbps
Packet Forwarding	0.72Mpps
MAC Address	1K
Buffer	768K
Transmission Distance	10BASE-T:Cat3,4,5 UTP(≤250 meter) 100BASE-TX:Cat5 or later UTP(150 meter)
Watt	Standby Power Consumption: ≤3W;
LED Indicator	PWR:Power LED 1-5:(Link LED=10/100MLink)
Power	External Power DC:12V 0.5A
Operating Temperature/Humidity	-10~+55°C; 5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75°C; 5%~95% RH Non coagulation
Product size/Packing size (L*W*H)	88mm*83mm*25mm 105mm*105mm*63mm
N.W/G.W (kg)	0.2kg/0.3kg
Installation	Desktop
Lightning protection level	3KV 8/20us; IP30
Certificate	CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;

### Product Dimension

