

➤ **Manual for S2600WP-8G-4TC**

All gigabit PoE managed switch

Product overview

hasivo S2600WP-8G-4TC L2 multi-functional network PoE management switch independently developed by hasivo adopts Realtek's new generation high-performance platform and new self-developed switch system, and supports flexible network management functions such as 802.1Q VLAN, IGMP, port monitoring, port aggregation, bandwidth control, ring application, etc. This series of switches is specially designed for the construction of high-performance complex network requirements, providing a comprehensive security protection system, perfect qos strategy and rich VLAN functions, simple management and maintenance, and can be applied to the core layer of small and medium-sized enterprises, communities and schools.

Port performance

- ◆ Supply 8*10/ 100/1000M PoE ports, all of which can realize line speed forwarding.
- ◆ Supply 4*COMBO for high-speed uplink transmission.
- ◆ Each port supports MDI/ MDIX auto flip and duplex / rate self negotiation.
- ◆ Support IEEE 802.3x full duplex flow control and backpressure half duplex flow control.

PoE Function

- ◆ Complied to IEEE 802.3af/at, whole device PoE output power up to 150W, single port PoE power up to 30W.
- ◆ Automatically detect and supply power for PoE devices.
- ◆ Advanced PD detection function when PoE is on, the switch can achieve real-time detection on powered devices. And the switch automatically sets the ports and then restores PoE power supplying to make no duty come true.

Functional features

- ◆ Add a variety of new applications based on IPv6, easily adapt to modern complex network management applications
- ◆ Support IEEE 802.1Q VLAN, users can divide VLAN flexibly according to their needs.
- ◆ Support voice VLAN, configure QoS parameters for voice data stream, improve the transmission priority of voice data stream and ensure the call quality.
- ◆ It supports QoS, supports port based, 802.1p and DSCP based priority modes to optimize the bandwidth configuration.
- ◆ It supports ACL, achieves packet filtering by configuring matching rules, processing operations and time permissions, and provides flexible security access control policies
- ◆ Support IGMP V1 / V2 multicast protocol, support IGMP snooping, meet the requirements of multi terminal HD video monitoring and video conference access.
- ◆ Support multicast VLAN, multicast filtering, efficient data transmission, save network bandwidth, reduce network load.
- ◆ Support port monitoring, copy the data package of monitored port to the monitoring port to realize network monitoring.
- ◆ Support the management and maintenance of equipment through web interface.
- ◆ It supports port convergence, effectively increases link bandwidth, realizes link backup and improves link reliability.

Security & Protection

- ◆ STP / RSTP / MSTP spanning tree protocol is supported to eliminate layer-2 loops and realize link backup.
- ◆ Support tree security function, prevent devices in tree network from being attacked by various forms of malicious.
- ◆ It supports static aggregation and dynamic aggregation, effectively increases link bandwidth, realizes load balancing, link backup, and improves link reliability.

Running and Maintenance

- ◆ Support web management, CLI command line (console, telnet), SNMP (v1/v2/v3) and other diversified management and maintenance methods.
- ◆ It supports HTTPS, SSL V3, tls v1, ssh v1/v2 and other encryption methods, and makes management more secure.
- ◆ It supports RMON, system log and port traffic statistics to facilitate network optimization and transformation.
- ◆ Users can know the working status of the switch through the power indicator (PWR), port status indicator and system status indicator (sys).

02 Spare parts list




Switch



AC power cable




User manual+Warranty Card




Rack hanger

03 Product display

Front

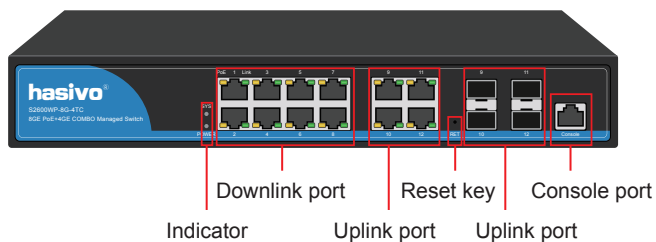

Back

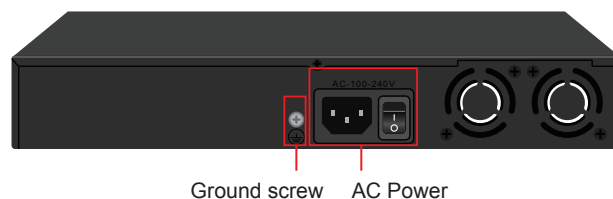

Indicator definition:

Indicator		Status	Description
Power indicator: PWR		Green light is always on	Power on normal
		Always off	No power
System indicator: SYS		1S Slow flash	System is operating normally
Network indicator	Green	Light is on	The corresponding port has data transmission
	Orange	Light is on	The corresponding port PoE output normal


04 Installation&Points of attention

Checking before installation


- 1.Check whether the accessories are complete. If there is any omission, please contact us.
- 2.Check whether the power supply voltage is consistent with the working voltage of the switch,so as to avoid the equipment burning out due to high voltage.
- 3.Ensure that the installation position of the switch has certain ventilation and heat dissipation conditions.
- 4.Please keep the power off during installation to avoid potential safety hazards.
- 5.Please install the switch on a stable plane to avoid falling and damage.

Port installation and connection

»»» Insert the data cable

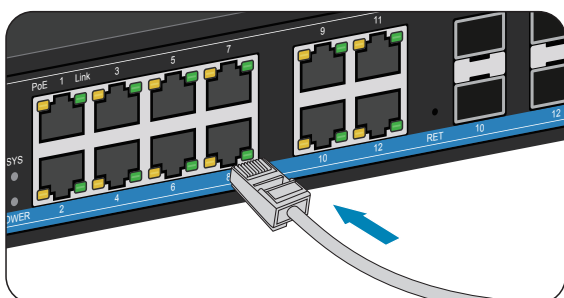

»»» Install the SFP module

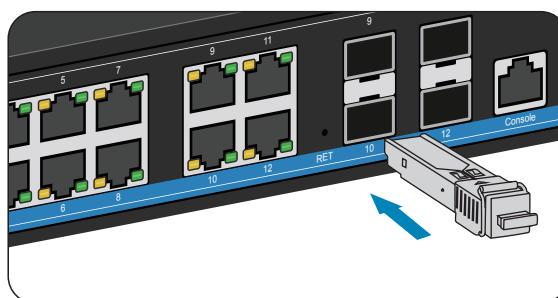


As shown in the figure, insert the crystal head of the data cable into the network port. When you hear a clear click, it indicates that the crystal head is successfully connected with the network port of the switch. Just plug in all the network cables of the network equipment in this way.

As shown in the figure, align the optical fiber module with the optical port of the SFP and insert it smoothly. When you hear a clear click, it indicates that the optical fiber module is installed successfully. Just install the two optical fiber modules in this way.

Install to desktop


➤➤➤ Place the switch on the desktop

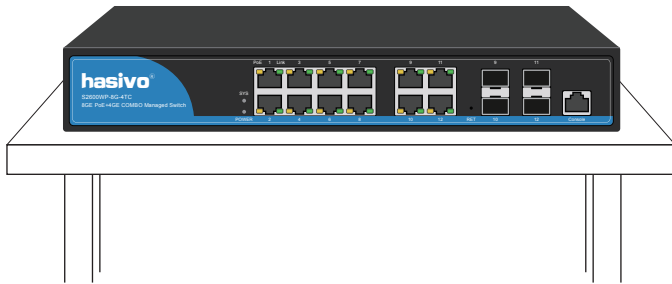


The switch should be placed on a well ventilated horizontal desktop, which is conducive to better heat dissipation of the equipment

Install to cabinet/Rack


1. install the rack lug attached to the equipment to both sides of the switch with screws

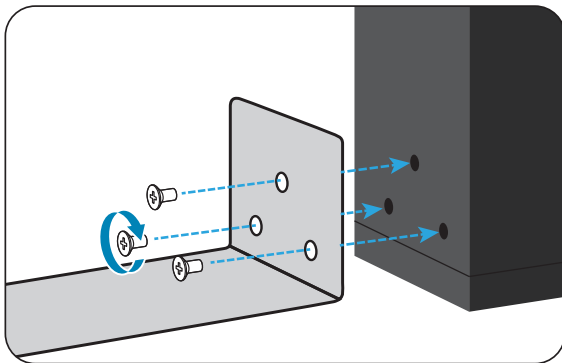

2. Install floating nut on cabinet / rack

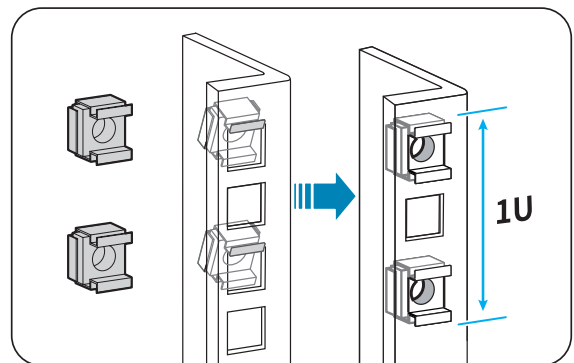


3. Put the switch installed with the lug into the cabinet and screw on the screw to complete the installation.

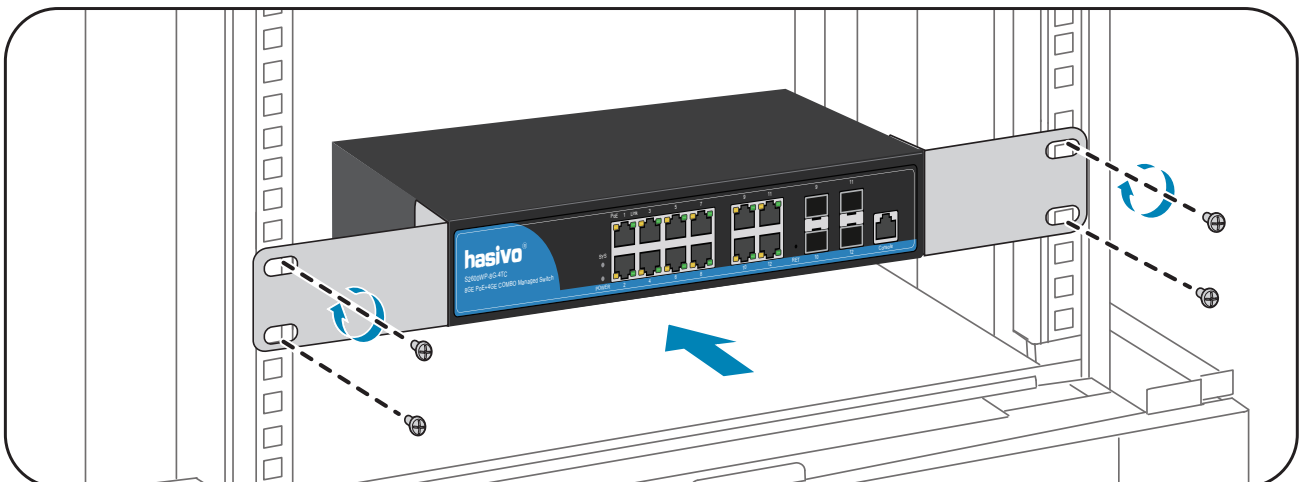

Power on

Connected the power

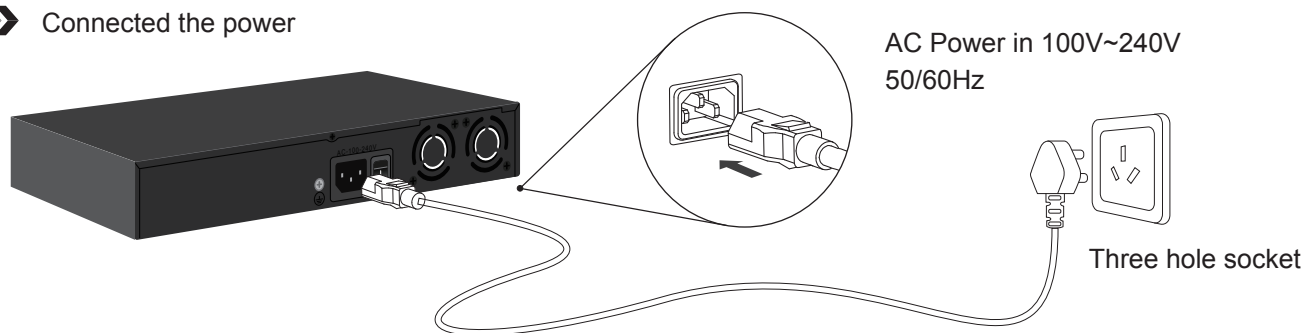


Points of attention

1. Do not stack heavy objects on the switch to avoid danger.
2. In order to avoid the risk of electric shock, please do not open the machine box when the switch is working, even if it is not powered on, please contact us in case of any problem.
3. Before cleaning the switch, pull out the power plug of the switch. Do not wipe it with wet fabric or clean it with liquid.
4. If the power adapter is damaged, do not replace it with other power adapters. This switch should be equipped with original power adapter.

05 Application

VLAN application

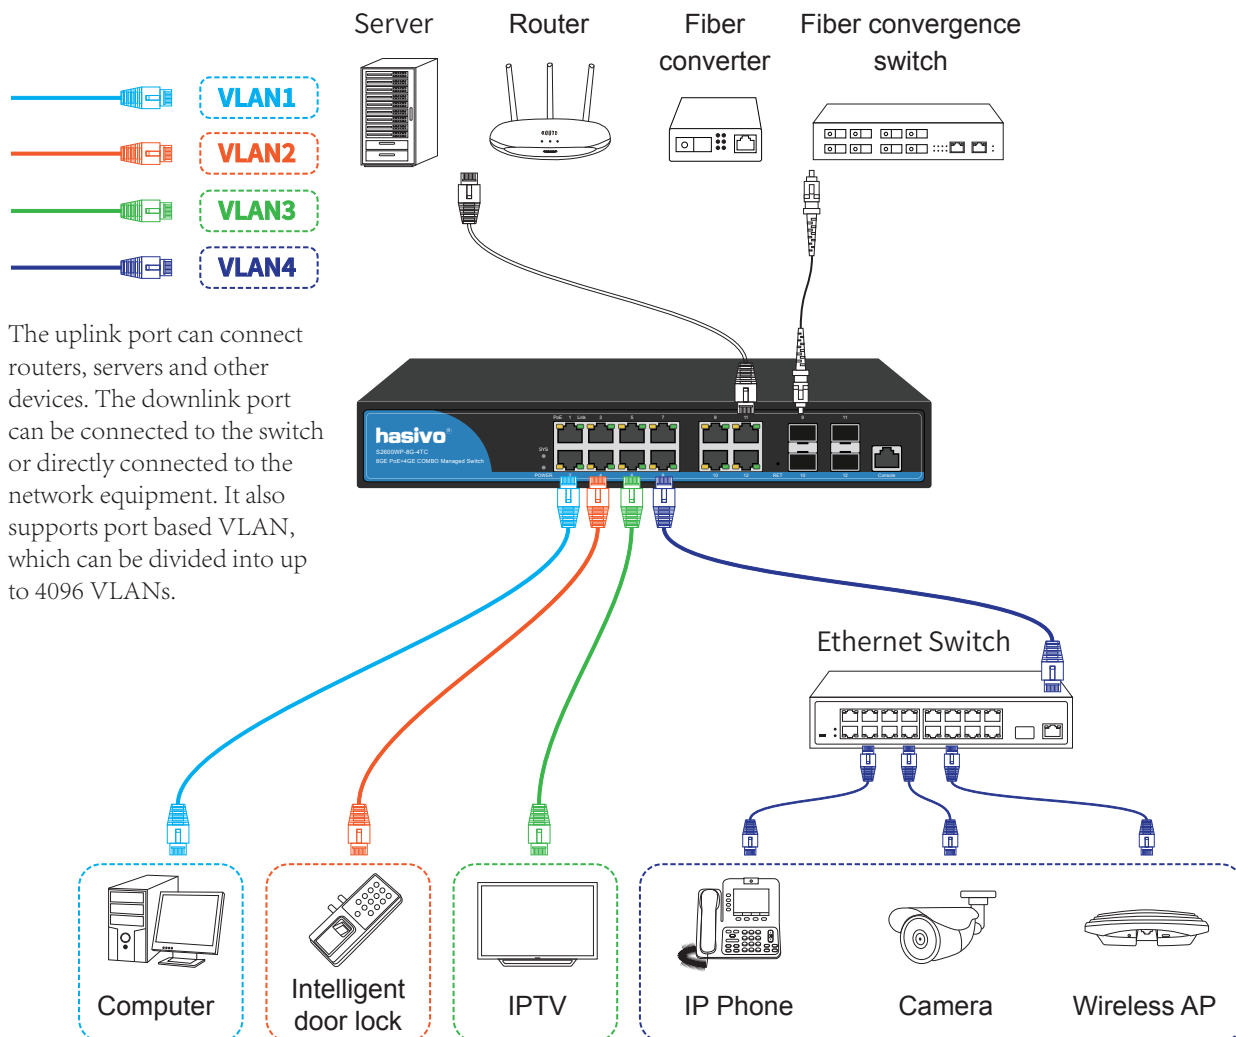


Application of ring network

RPL Owner ●

RPL —

Data stream ↔

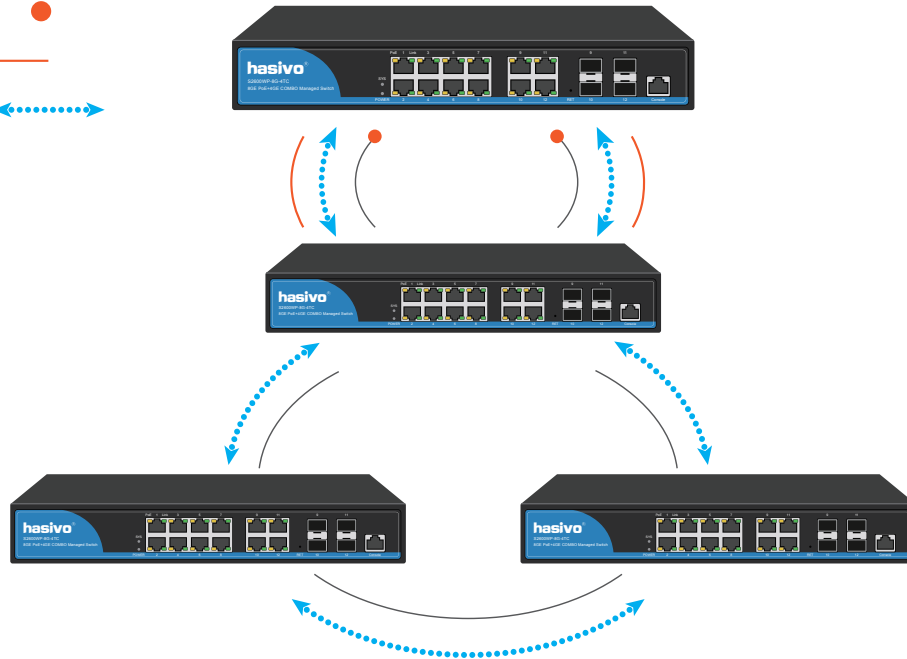

06 Common troubleshooting

- ⚠ The PWR indicator is not on after the power is connected → Check whether the power adapter and plug are connected correctly, whether the power cord is damaged, and whether the power adapter is damaged.
 - ⚠ Switch cannot communicate after power up → Check whether the switch indicator is on. If the indicator is off, the network cable is not connected. If the indicator is on, the communication fault is indicated.
 - ⚠ Switch network speed suddenly become very slow → Take off the plug and restart the switch.
- [If the above problems or other switch problems can not be solved, please contact us for technical support]

07 Product Parameter

Model	S2600WP-8G-4TC
Product	Full Gigabit 4SFP+12GE L2+ Managed PoE Switch
Fixed Port	8*10/100/1000Base-TX PoE port 4*COMBO
PoE Ports	1-8 port supports IEEE802.3af/at, max 30W/port, PoE out
Console port	1*console port
Reset Key	1
PoE Pin	12+ 36-
PoE Bridge	max 150W
Network Protocol	IEEE 802.3 IEEE 802.3u 100BASE-TX IEEE 802.3ab1000BASE-T、IEEE 802.3x IEEE 802.3z 1000BASE-X、IEEE 802.3ad IEEE 802.3q 、IEEE 802.3q/p IEEE 802.1w、IEEE 802.1d 、IEEE 802.1S STP(Spanning Tree Protocol) RSTP/MSTP(Rapid Spanning Tree Protocol) EPPS ring network protocol EAPS ring network protocol
Bandwidth	56/128Gbps
Packet Forwarding	41.67Mpps
MAC Address	8K
Buffer	4.1M
Transmission Distance	10BASE-T : Cat3,4,5 UTP(≤250 meter) 100BASE-TX : Cat5 or later UTP(≤100 meter) 1000BASE-TX : Cat6 or later UTP(≤1000 meter) 1000BASE-SX:62.5μm/50μm MMF(2m~550m) 1000BASE-LX:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)
FLASH	128M
RAM	128M
CPU	500MHz
DDR	1G DDR3
LED Indicator	PWR: Power LED Port:(Green=Link LED;Orange=PoE LED) SYS:(System LED)
Power	Built-in power AC: 100-240Vac 50-60Hz 2A max 165W
Operating Temperature/Humidity	-10~+55°C; 5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75°C; 5%~95% RH Non coagulation
Product size/ package size (L*W*H)	293mm*190mm*45mm 410mm*278mm*95mm
N.W/G.W (kg)	1.5kg/2.2kg

Installation	Rack-mount(optional machine hanger spare parts)
Lightning protection / protection level	6KV 8/20us; IP30
Certificate	3C;CE-EMC EN55032;CE-LVD EN62368; FCC Part 15 Class B;RoHS;
Warranty	Whole device for 1 year(Accessories not included)

Software Function

The followings are main functions not included in all the functions.Please contact with us for more other information! (We support software development for customization requirement)

Network Protocol	IEEE 802.3x IEEE 802.3、 IEEE 802.3u、 IEEE 802.3ab、 IEEE 802.3z IEEE 802.3ad IEEE 802.3q、 IEEE 802.3q/p IEEE 802.1w、 IEEE 802.1d、 IEEE 802.1S、 IEEE 802.1X
MAC	Support 16K MAC address,auto aging and learning
VLAN Configuration	Support port-based VLAN Up to 4096 VLANs Support Voice VLAN, can configure Qos for voice data 802.1Q
Spanning Tree	STP(Spanning tree protocol) RSTP(Rapid spanning tree protocol) MSTP(Rapid spanning tree protocol) EPPS(Ring network protocol) EAPS(Ring network protocol) 802.1x
Port Aggregation	Support 8 groups of aggregation, each group support up to 8 ports
Port Mirroring	Support many-to-one port mirroring
Loop Guard	Support loop protection, real-time detection, quick alarm, concise location, Intelligent blocking, automatic recovery
Port Isolation	Support downlink ports isolate from each other and communicate with uplink port as well
Flow Control	Half duplex based on Back pressure; Full duplex based on PAUSE frame
Speed Limitation	Bandwidth management based on port input and output
Multicast Control	IGMPv1/2/3 and MLDv1/2 Snooping GMRP protocol registration Multicast address management, multicast VLAN, multicast routing port, static multicast address
DHCP	DHCP Snooping

Storm Suppression	Support unknown unicast, multicast , unknown multicast, broadcast type storm suppression; Storm suppression based on bandwidth adjustment and storm filtering
Security	Support User port+IP address+MAC address ACL based on IP, MAC Support security properties of number of MAC address based on port
QOS	802.1p port queue priority algorithm Cos/Tos,QOS remark WRR(Weighted Round Robin), weighted priority rotation algorithm WRR、SP、WFQ priority scheduling modes
Cable Sequence	Auto-MDIX; auto detection on straight-through and cross-over cable
Negotiation Mode	Port support auto negotiation function(self-negotiation transmission rate and duplex mode)
System maintenance	Upgrade package upload System log viewing WEB recovery factory configuration
PoE management	Turn the Port On or Off Standard PoE schedule management Automatic detection of online equipment function(Automatic execution without operation)
Network Management	WEB interface management CLI management based on Telnet、TFTIP、Console SNMP V1/V2/V3 management RMONV1/V2 management RMON management

PS: We will try our best to check the errors in the printing and pictures, but hasivo will not be responsible for any possible omissions. The appearance, specifications, parameters, prices and supply conditions of the products listed on this page are subject to change without notice.



Sichuan hasivo electronics CO.,LTD.

Address: NO.5-2 Anping street, New District, Economic Development Zone, Meishan City,Sichuan Province,China.

Post code: 620010

Offical website: <http://www.hasivo.com>

©2013-2022 Sichuan hasivo electronics CO.,LTD. All rights reserved

After-sale service: 028-38288776

Technical service: 028-38119776