



# How to install LABEL driver

1.Double click the LABEL .dmg


2.Double click LABEL\_V1.0\_signed .pkg to install the driver.

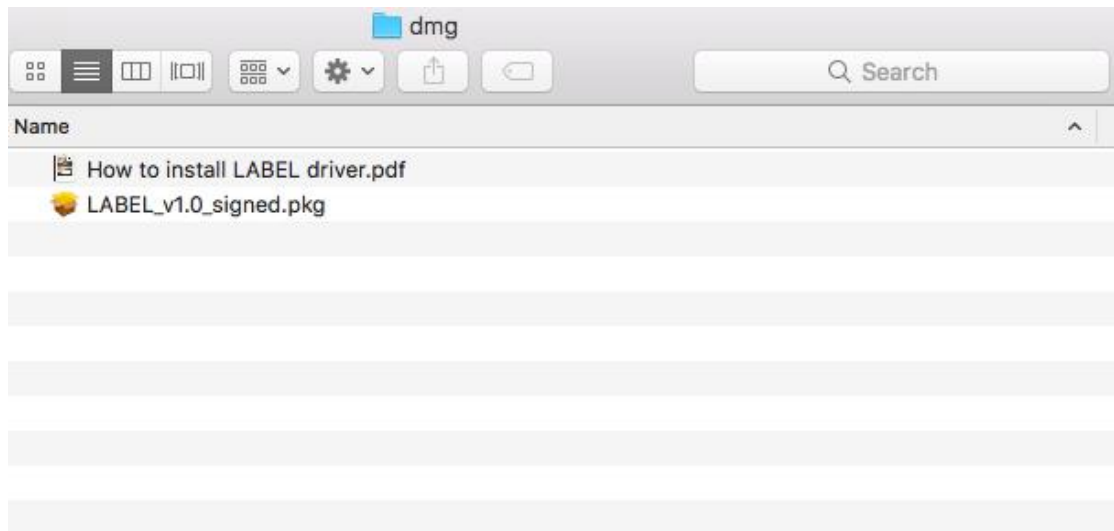


3.Click “continue” button.

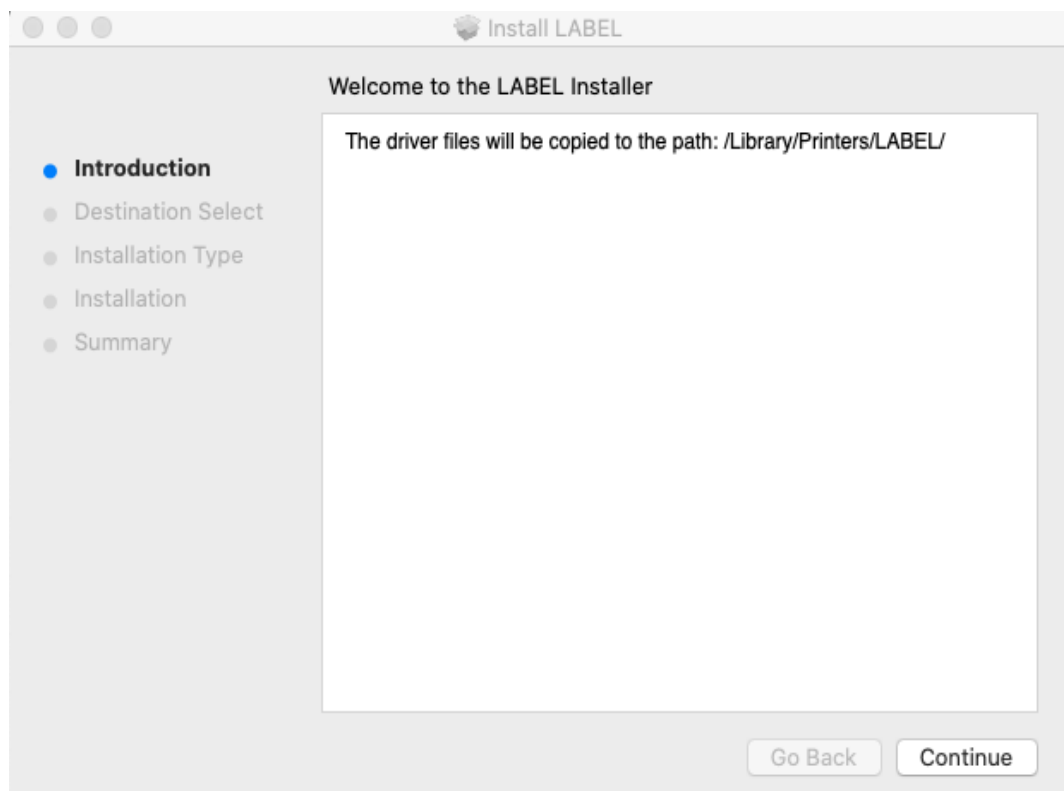


4.click “Install”

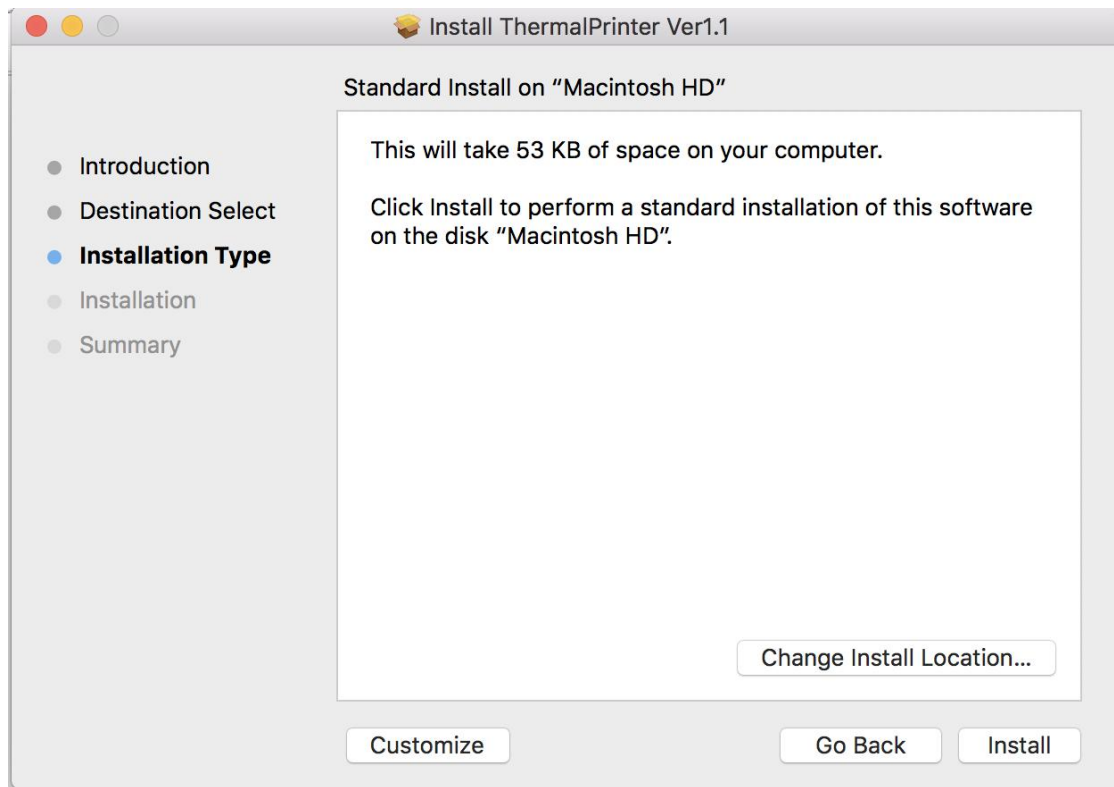


5. Use Touch ID or Enter your password.

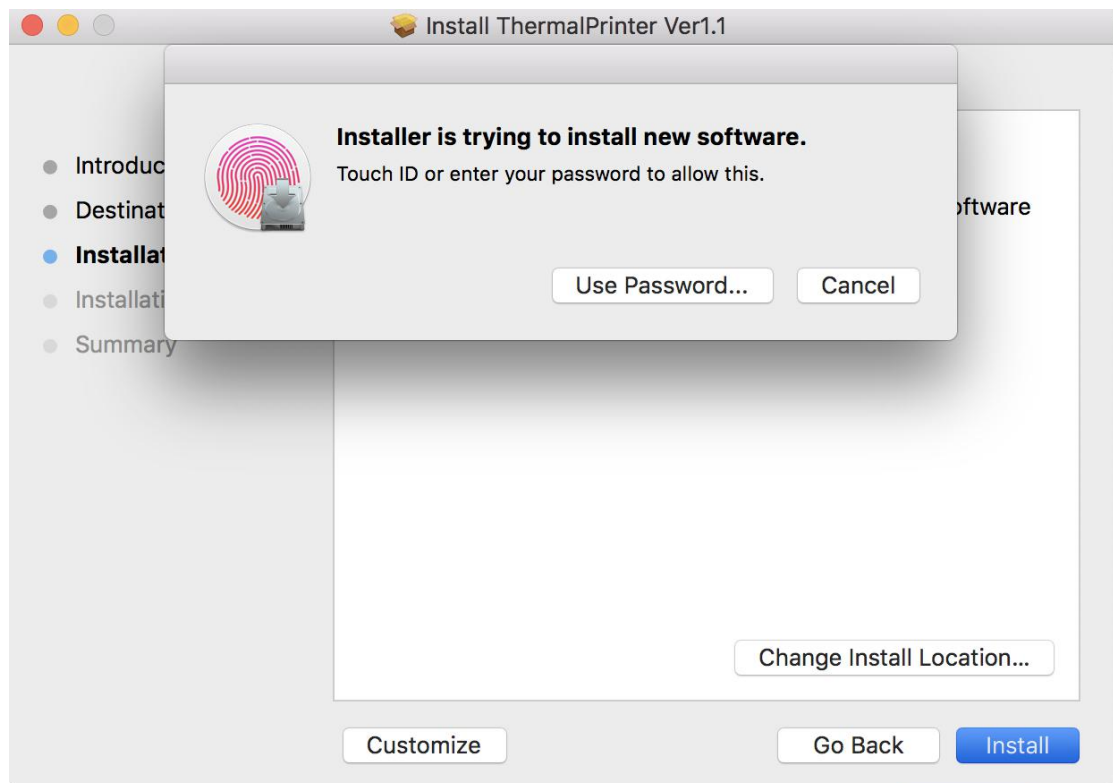


6. Click "Close" to finish.

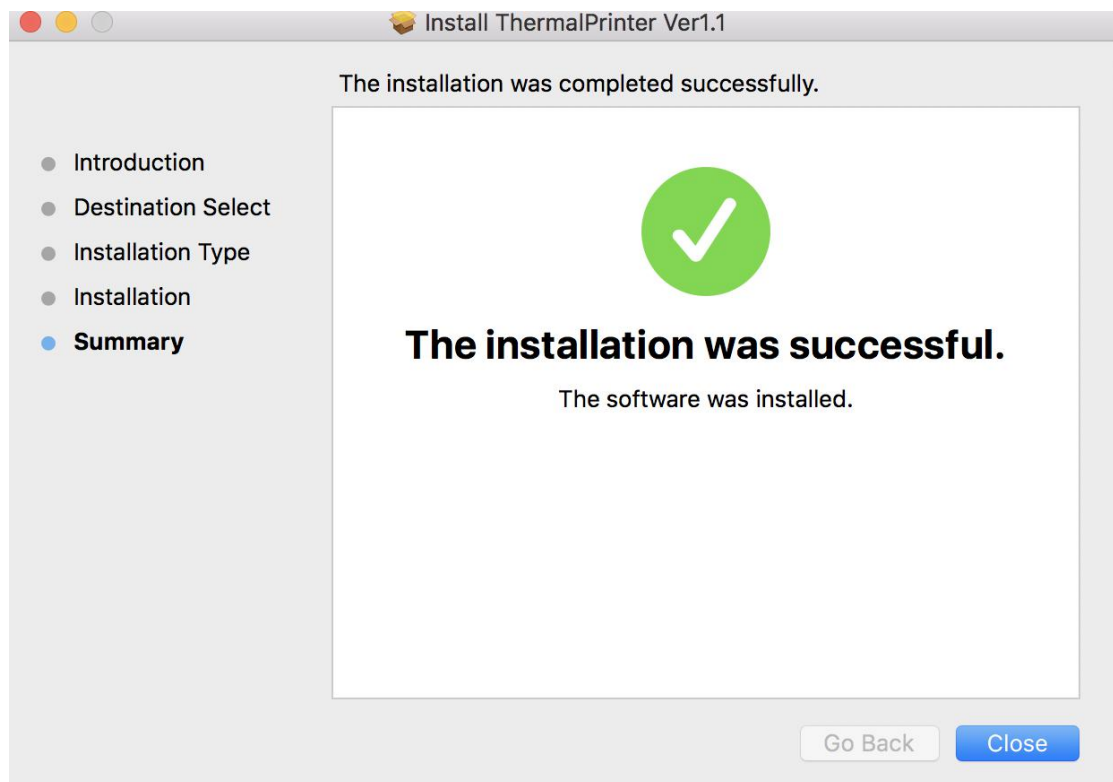

7. Open "System Preferences", and click "Printers and Scanners".

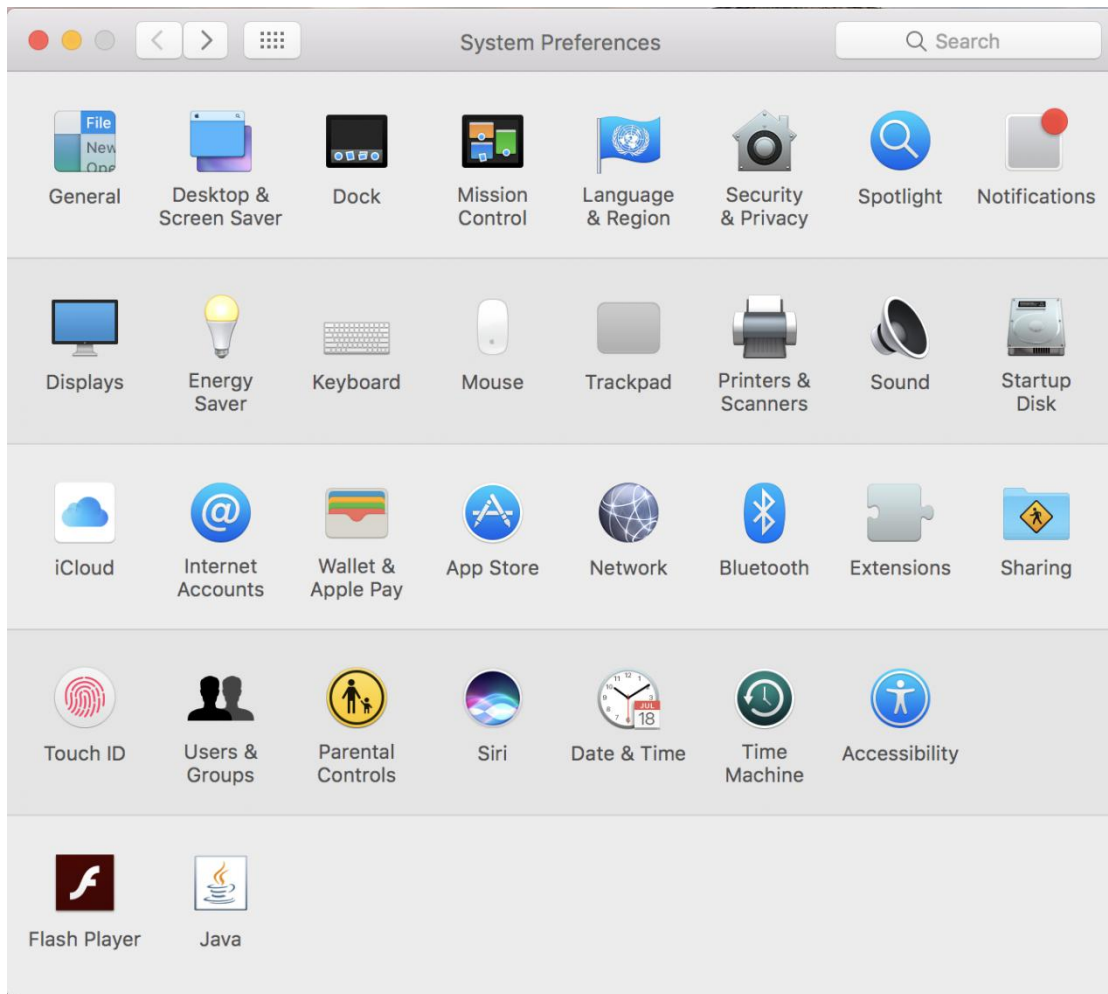


8.click “+” to add a new printer.

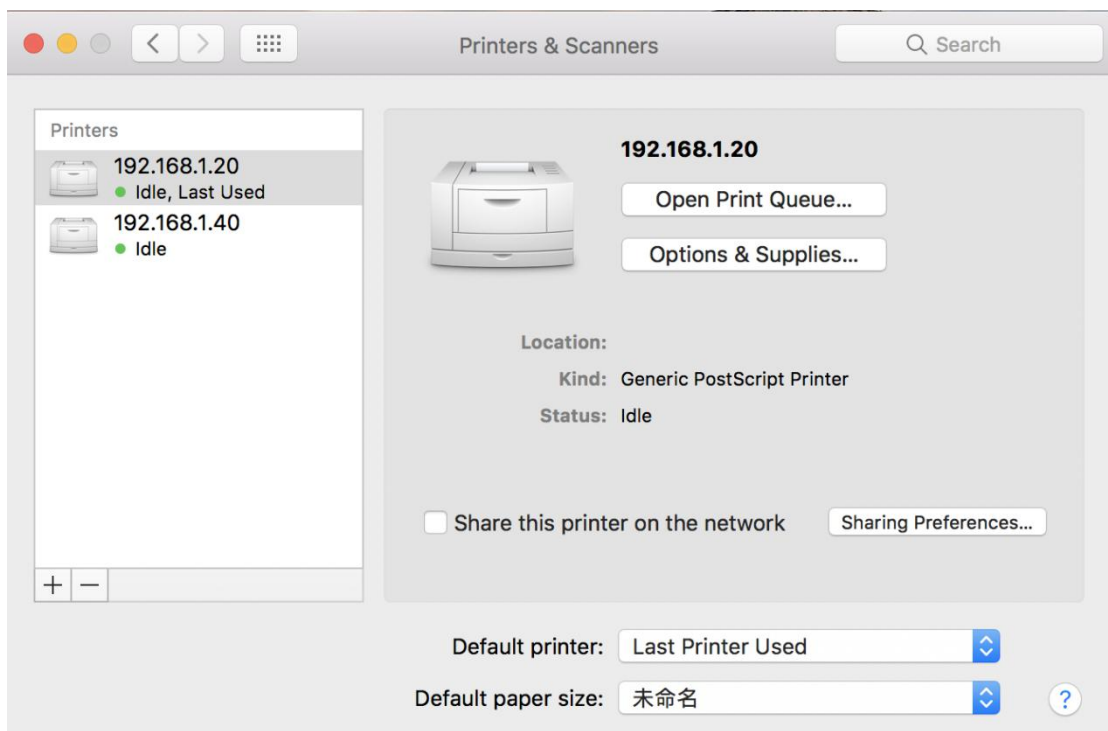


9.Turn on your printer, and choose “LABEL”,select “Select Software” under “Use” drop down

menu.

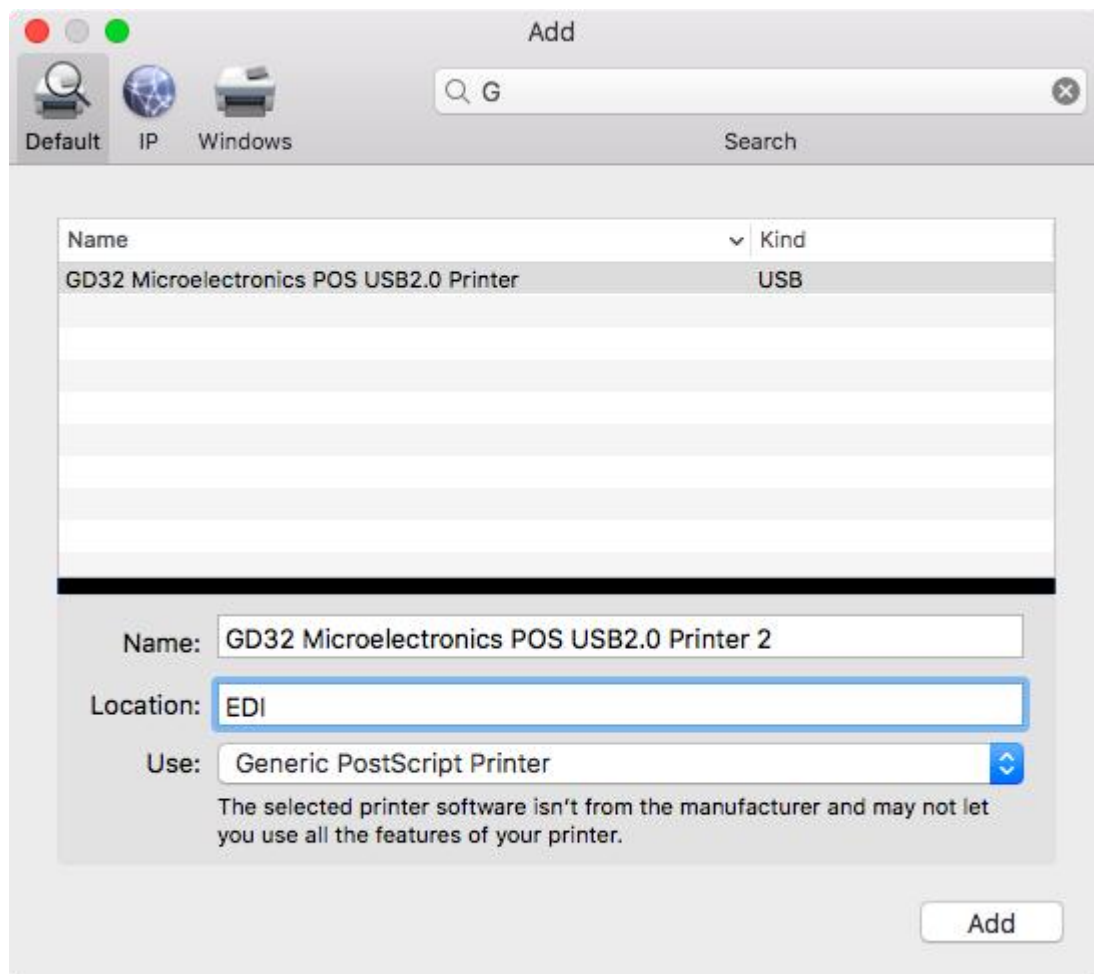

10. Input "LABEL", and choose "LABEL"

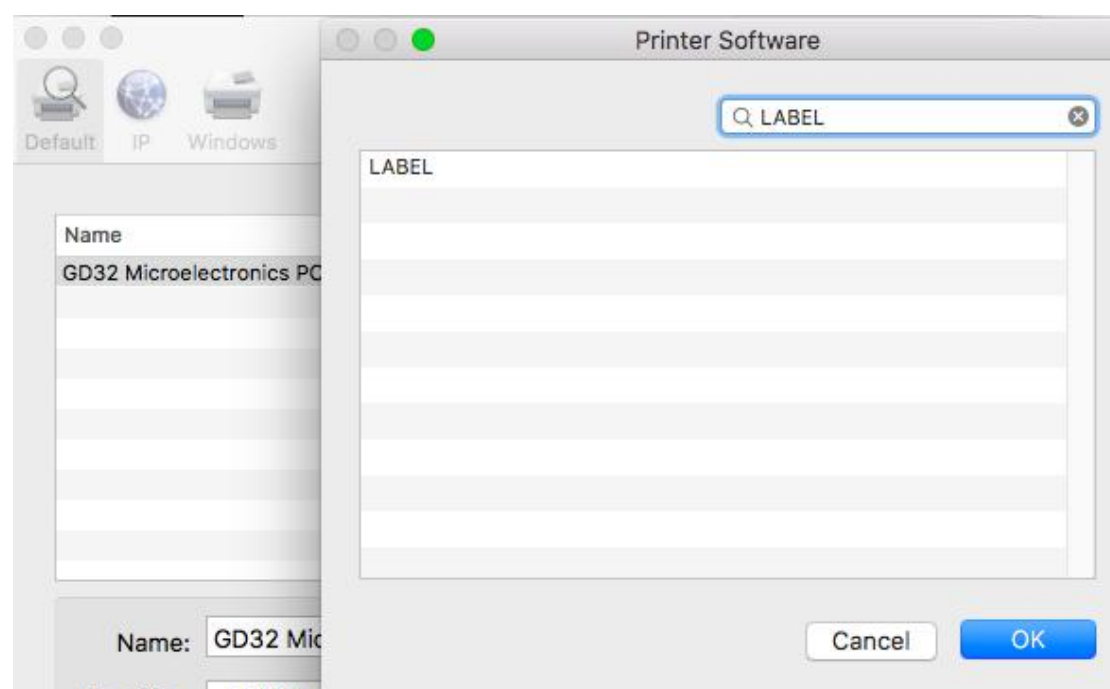

11. Click "Add"

Add

Default IP Windows Search

Name	Kind
GD32 Microelectronics POS USB2.0 Printer	USB

Name: GD32 Microelectronics POS USB2.0 Printer 2


Location: EDI

Use: LABEL

Add


12. Use Touch ID or enter your password.

13. Finish.

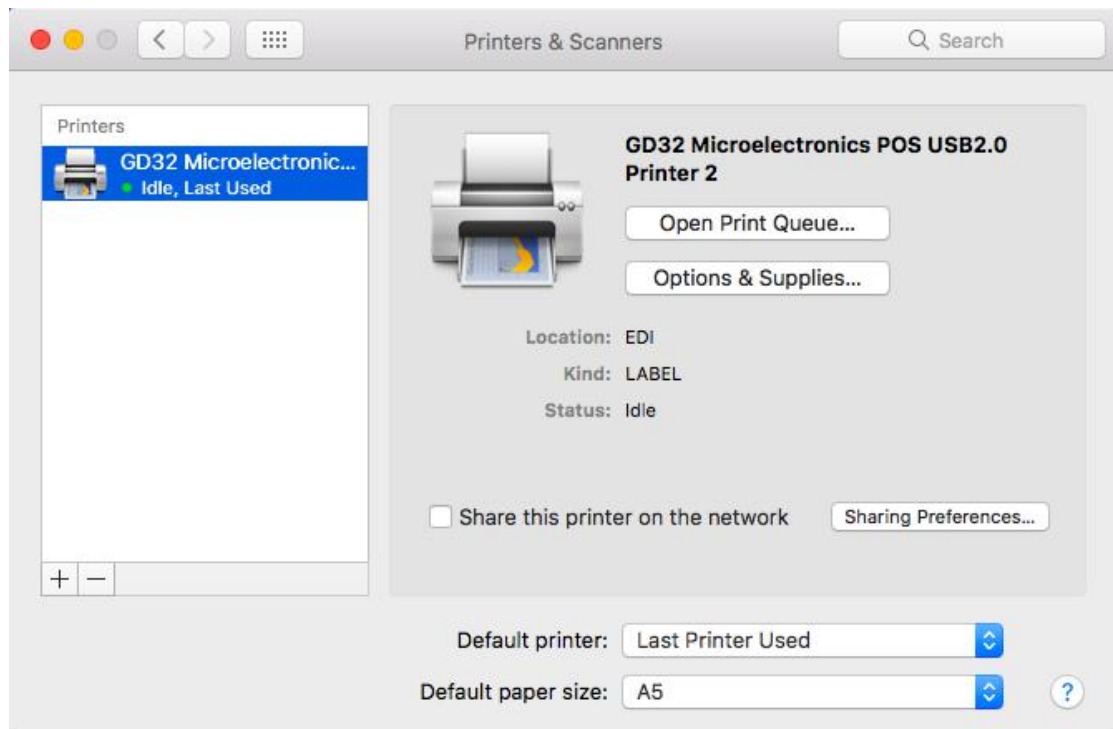


## How to change the setting of the printer, and how to define label size(Priview)

1. Open a PDF file(any document file is ok), Select "File"-->"Print".

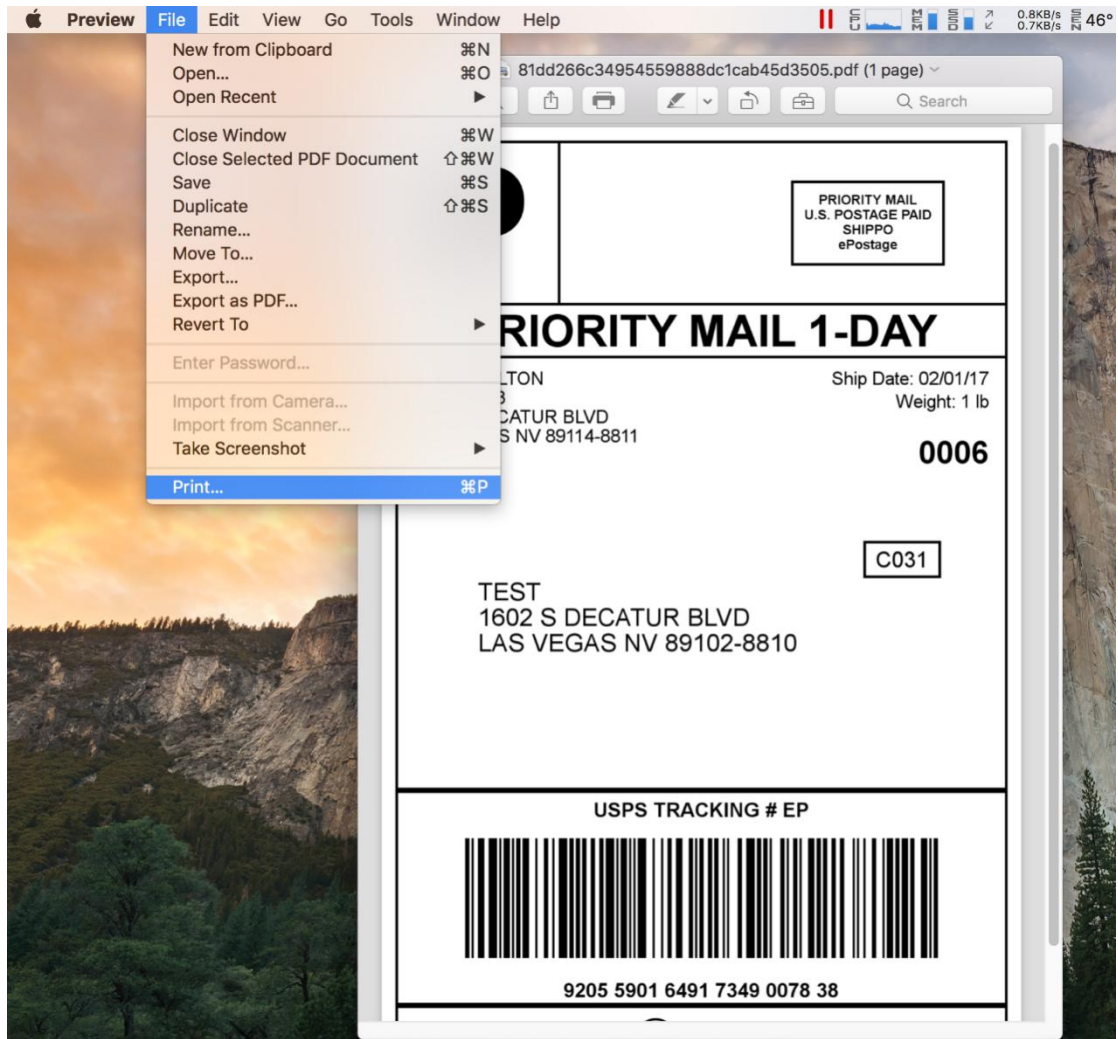

2. Choose "Manage Custom Sizes" under "Paper Size" drop down menu.

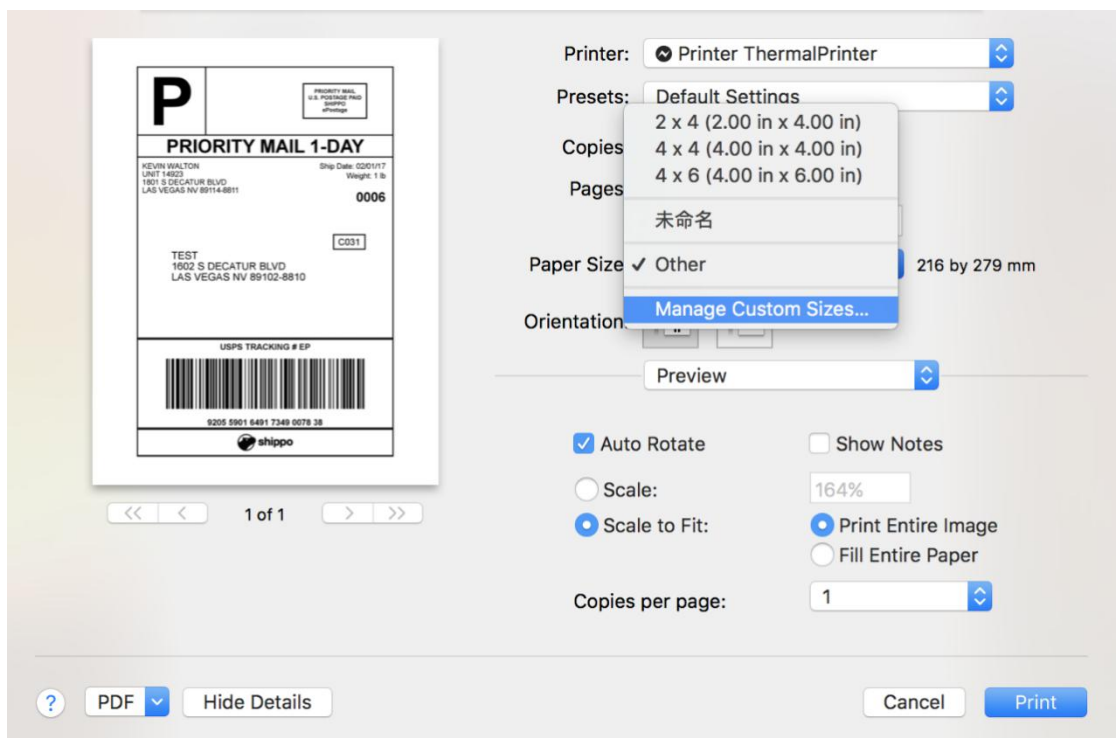



2. Click “+” to define a new label size, click “OK” to save.

100\*190

Paper Size: 100 190 mm  
Width Height

Non-Printable Area:  
Printer ThermalPrinter

0 mm 0 mm 0 mm 0 mm  
Left Top Bottom Right

+ - Duplicate

1 of 1

Darkness: 8

Horizontal Offset: 0mm

Vertical Offset: 0mm

PDF Hide Details Cancel Print

3. You can select the new Label “100\*190” now.

Printer: Printer ThermalPrinter

Presets: Default Settings

Copies: 1

Pages: All

Paper Size: 100\*190 100 by 190 mm

Orientation: Portrait

Printer Features

Feature Sets: Page Options

Print Speed: 4.00 in/sec

Darkness: 8

Horizontal Offset: 0mm

Vertical Offset: 0mm

PDF Hide Details Cancel Print

4. Select “Printer Features”, then you can change the setting of printer, for example: Speed, Darkness..

5. Click "Print".

5. Click "Print".