

User Manual

Exterior Garden Lighting

Please read user manual before commencing installation and keep it for future reference.

■WARNING.

1.The safety of this lighting fixture is guaranteed only if you comply with these instructions.

1. Please use the specific input voltage.
2. Please disconnect the power before repair, installation or replacement.
3. Please use the lights in the proper application places as to avoid the lights be broken or glass be broken.
4. Do not locate fixtures in low areas where water will collect.
5. If any questions on this instruction, please consult a professional qualified technicians.

■Instructions of installation.

1. Ensure mains supply is switched off during the whole installation period.
 2. Unpack the packaging carefully.
 3. Select a suitable location for your spotlight
 4. Insert the ground stake into the soil.
- Note: If the ground is hard or installation is difficult, thoroughly wet the ground where you wish to install the spike using a garden hose or watering can.
5. Carefully assemble the light bracket section on the ground stake with the screw.
 6. Please disassemble the trim, and remove the glass as to install the MR16 lamp.
 7. Install the MR16 lamp.

8. Turn on the MR16 lamp as to make the lamp warm and make the wet air go outside.

9. Put the glass back, and fix the trim to be tight as to avoid the water go inside.

10. Adjust the tilt of the light for a suitable direction for your application.

11. Use the IP67 or IP68 waterproof connector to connect the cables of the fixture and the cables of specific driver in parallel circuit.

12. Ensure everything is installed very well, and then turn on the power for the illumination application.

Note: The power of main supply must be switched off. before connecting the cables.

Remarks: The MR16 Lamp should be within 54 mm height at max. (Including the pins).

■Specifications.

Item No.: UL-1012-MR16

Input: DC12V

Power: /



Lamp type: /

Color Temperature: /

Beam angle: /

IP rating: IP67

Class: III

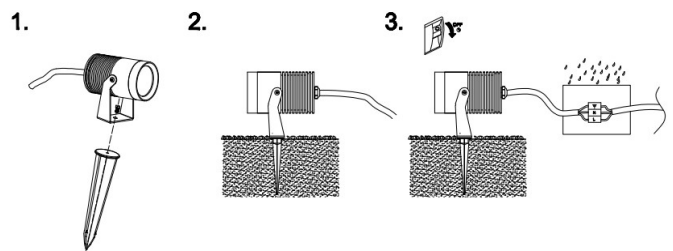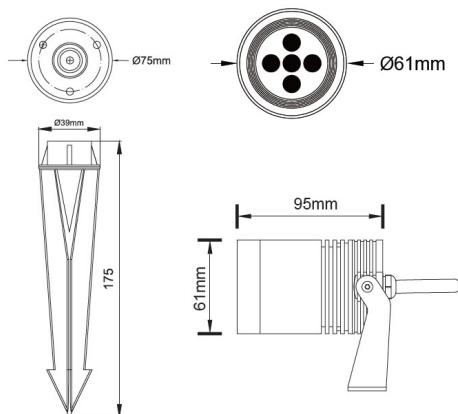

■Repair.

Neither the power pack nor the LED spotlight can be repaired in the event of damage to the cables or the housing and have to be replaced.

For your own safety, consult a qualified electrician or your specialist dealer if you have questions or encounter problems!

Protective measures: disconnect the power supply to all units



Warning.

The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.