


DIGITAL THERMOMETER

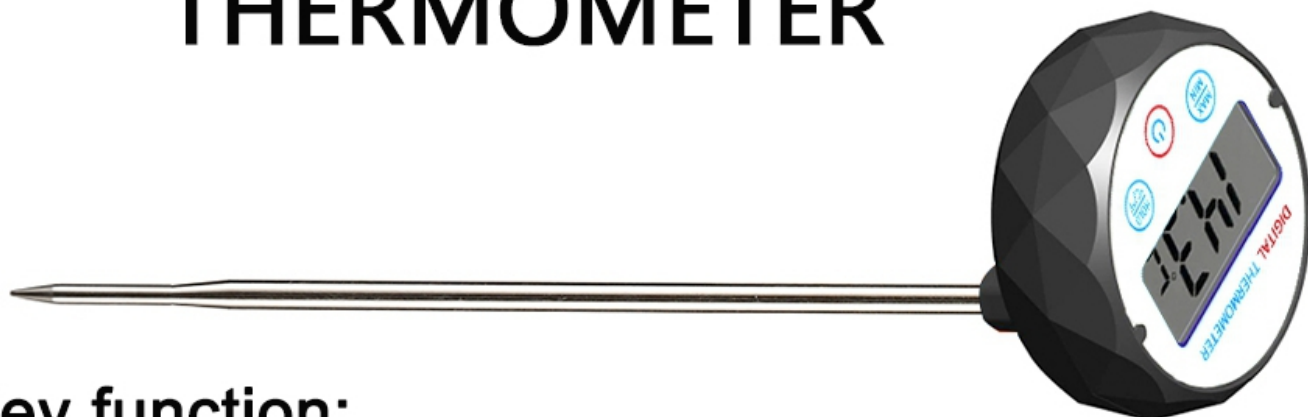

Key function:

- ① Click  switch ON/OFF
- ② Click  to lock the current temperature
Press  for 2 seconds to convert °C/°F
- ③ Click  to display the MAX memory temperature, click again to display the MIN memory temperature, in this interface, press and hold for 2 seconds to clear the MAX/MIN values
- ④ Click   button at the same time, screen shows ON, 10 minutes auto power off function is turn on, click again, screen shows OFF, function close

Product parameters:

measuring range: $-50^{\circ}\text{C} \sim 300^{\circ}\text{C}$ ($-58^{\circ}\text{F} \sim 572^{\circ}\text{F}$)

measuring error: $\pm 1^{\circ}\text{C}$

measuring speed: 3s~6s

resolution: $0.1^{\circ}\text{C}/0.1^{\circ}\text{F}$

battery model: 1.5V LR44 button battery