


BTN350/450/550/650GC/E BLU 低氮燃气燃烧器

BTN350/450/550/650GC/E BLU Low NOx Gas Burner

功率 Power (kW)	型号 Model	订货编号 Article No.	电源 Power supply	电机功率 Motor power (kW)	包装尺寸 package size (L*W*H/mm)	重量 weight (kg)
1200~3600	BTN350GC BLU	203 22 504	380V 50Hz	7.5	1950x1120x1100	250
	BTN350GE BLU	203 22 500				
1500~4450	BTN450GC BLU	203 22 505	380V 50Hz	9.2	1950x1120x1100	250
	BTN450GE BLU	203 22 501				
1800~5250	BTN550GC BLU	203 22 506	380V 50Hz	12	1950x1120x1100	250
	BTN550GE BLU	203 22 502				
2200~6250	BTN650GC BLU	203 22 507	380V 50Hz	15	1950x1120x1100	280
	BTN650GE BLU	203 22 503				

外观尺寸图

Overall dimensions

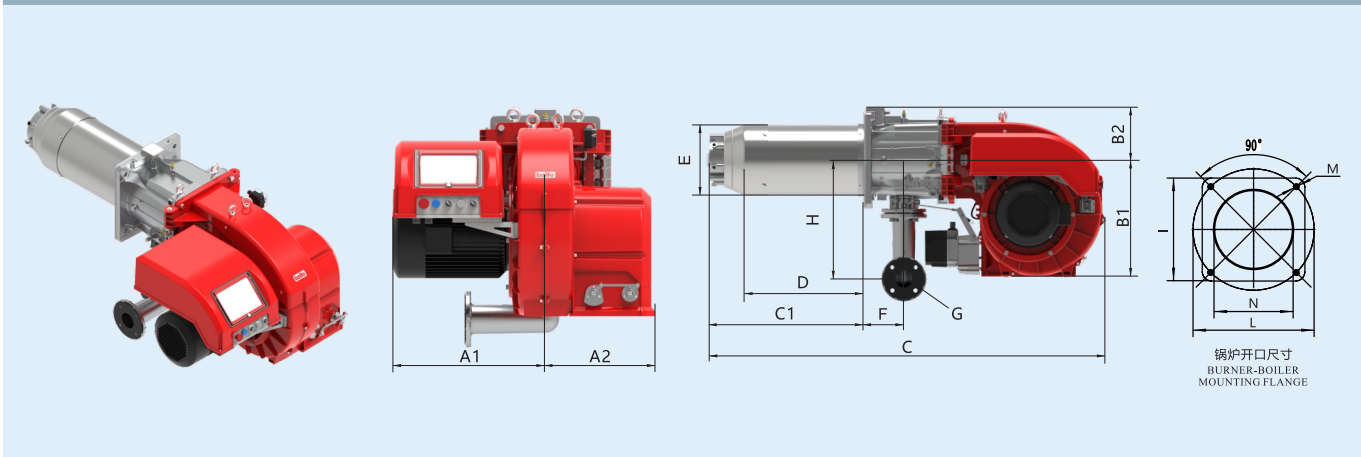

型号 model	A1	A2	B1	B2	C	C1	D	E	F	G	H	I	L	M	N
	mm	mm	mm	mm	mm	mm	mm	Φmm	mm	mm	mm	mm	Φmm	M	Φmm
BTN350GC BLU	556	400	519	239	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN350GE BLU	556	400	519	335	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN450GC BLU	556	400	519	239	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN450GE BLU	556	400	519	335	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN550GC BLU	583	400	519	239	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN550GE BLU	583	400	519	335	1775	698	534	313	178	DN65	528	400	452	4-M16	350
BTN650GC BLU	583	400	519	239	1775	698	534	336	178	DN65	528	400	452	4-M16	350
BTN650GE BLU	583	400	519	335	1775	698	534	336	178	DN65	528	400	452	4-M16	350

备选功能

Alternative function

加长的燃烧筒，可定制60Hz
Longer blast tube and 60HZ motor is customized.

使用LPG燃气时，需在燃烧头上安装该特殊组件
When using LPG gas, this special component is installed on the burner

阀组-与锅炉配套的组件
Valve block - Component for boiler

比例调节功能

Proportional control function

另外订购比例仪RWF40或DC1020与调节组件，燃烧器即可实现比例调节运行。
In addition, order the proportioner RWF40 or DC1020 and the regulating assembly, and the burner can be proportionally regulated.


备注

remark

配有空气关闭装置。
Equipped with air closing device.

曲线图

curve graph

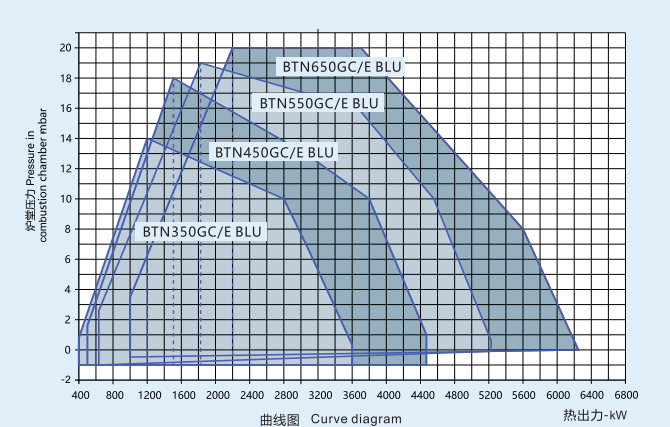


BTN350/450/550/650GC/E BLU 低氮燃气燃烧器

BTN350/450/550/650GC/E BLU Low NO_x Gas Burner


锅炉燃烧器功率(kW)

Burner Output (kW)

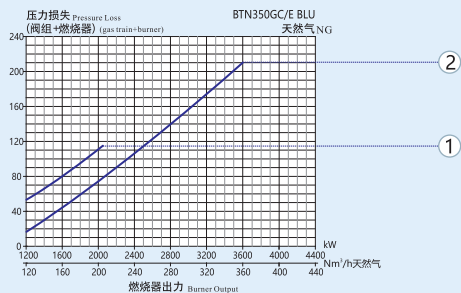


锅炉燃烧器功率(kW)

Burner Output (kW)

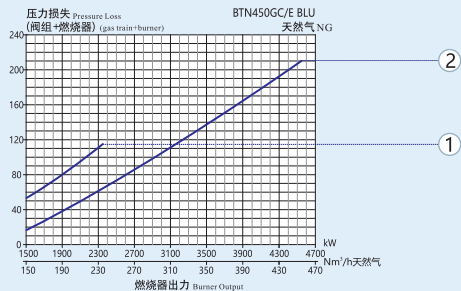


锅炉燃烧器功率(kW)

Burner Output (kW)

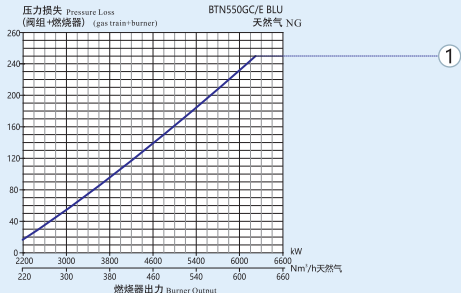

锅炉燃烧器功率(kW)

Burner Output (kW)

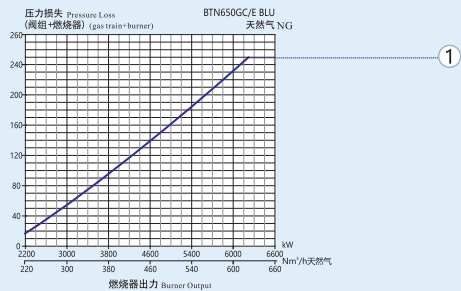

BTN350GC/E BLU

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-MVD220/5+MVDLE220/5-DN65	222 25 454	-	200	QF2
② QF-DMV-D5065/11-DN65	222 25 128	-	500	QF1
② QF-DMV-D5065/11-LDU-DN65	222 25 145	-	560	QF1
② QF-VGD40.065-DN65	222 25 233	-	700	QF4
② QF-VGD40.065-LDU-DN65	222 25 247	GW150A5	700	QF4

BTN450GC/E BLU

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-MVD220/5+MVDLE220/5-DN65	222 25 454	-	200	QF2
② QF-DMV-D5065/11-DN65	222 25 128	-	500	QF1
② QF-DMV-D5065/11-LDU-DN65	222 25 145	-	560	QF1
② QF-VGD40.065-DN65	222 25 233	-	700	QF4
② QF-VGD40.065-LDU-DN65	222 25 247	GW150A5	700	QF4

BTN550GC/E BLU

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-DMV-D5065/11-DN65	222 25 128	-	500	QF1
① QF-DMV-D5065/11-LDU-DN65	222 25 145	GW150A5	500	QF1
① QF-VGD40.065-DN65	222 25 233	-	700	QF4
① QF-VGD40.065-LDU-DN65	222 25 247	GW150A5	700	QF4

BTN650GC/E BLU

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-DMV-D5065/11-DN65	222 25 128	-	500	QF1
① QF-DMV-D5065/11-LDU-DN65	222 25 145	GW150A5	500	QF1
① QF-VGD40.065-DN65	222 25 233	-	700	QF4
① QF-VGD40.065-LDU-DN65	222 25 247	GW150A5	700	QF4