



FEATURE

- ◎ 2 years warranty
- ◎ Economy design
- ◎ 80% loading advise
- ◎ Customize logo and laser print
- ◎ Cooling by free air convection and Fan cooling
- ◎ High efficiency, long life and high reliability
- ◎ Protections: Short circuit / Overload / Over voltage



APPLICATION


- ◎ Widely used in advertising and decorating lighting, such as led strips.
- ◎ Display, module, light boxes, lamp strings and more

IP52 **SELV** **CE** **RoHS**



PRODUCT PARAMETERS

型号 Model	输出功率 Pout	输入电压 Vin	输出电压 Vout	输出电流 Iout	效率 Effi	IP等级 IP	尺寸 Size(mm)	重量 Weight(g)
JT-60-12RP	60W	200-240V AC	12V	5A	90%	IP43	130*74*42	189g
JT-100-12RP	100W	200-240V AC	12V	8.3A	90%	IP43	148*74*42	245g
JT-150-12RP	150W	200-240V AC	12V	12.5A	90%	IP43	148*74*42	340g
JT-200-12RP	200W	200-240V AC	12V	16.7A	90%	IP43	195*74*42	395g
JT-300-12RP	300W	200-240V AC	12V	25.0A	90%	IP43	182*93*50	452g
JT-400A-12RP	400W	200-240V AC	12V	33.3A	90%	IP43	182*118*50	516g
JT-400B-12RP	400W	200-240V AC	12V	33.3A	90%	IP43	182*118*50	502g
JT-500-12RP	500W	200-240V AC	12V	41.7A	90%	IP43	205*118*50	802g
JT-600-12RP	600W	200-240V AC	12V	50A	90%	IP43	220*118*50	852g
JT-700-12RP	700W	200-240V AC	12V	58.3A	90%	IP43	220*118*50	930g
JT-350-5RP	350W	200-240V AC	5V	70A	90%	IP43	182*118*50	516g

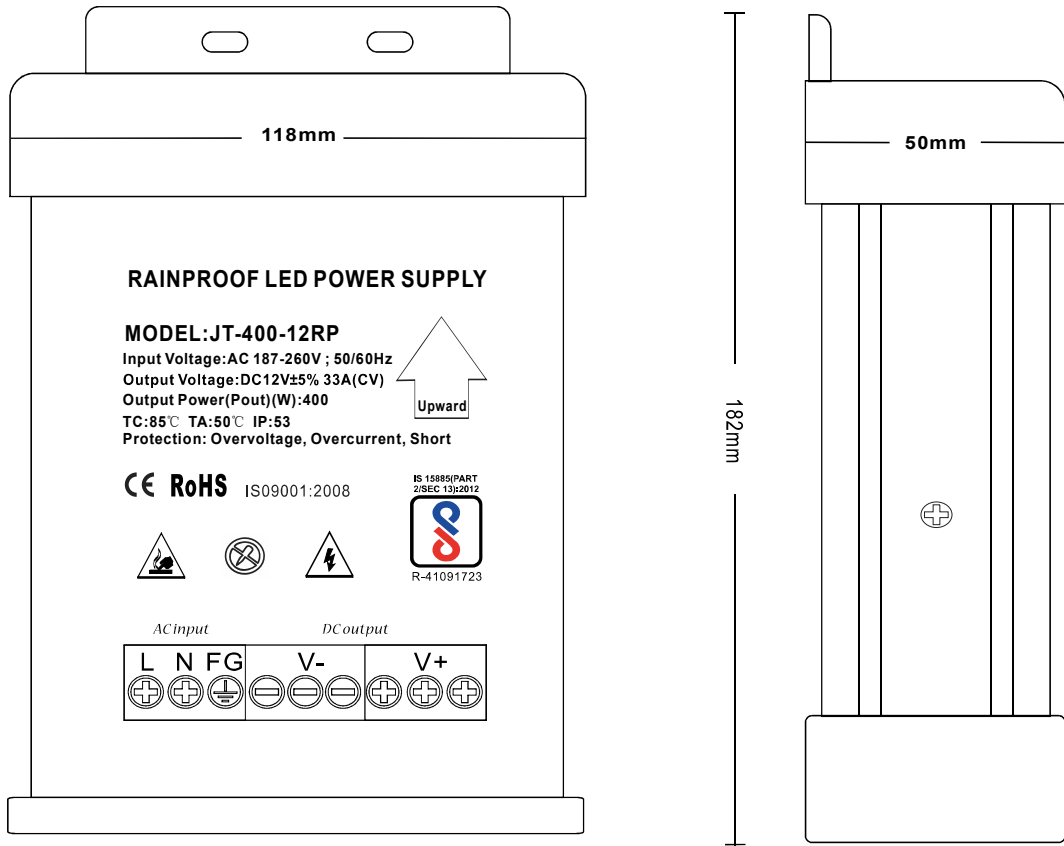

CAUTION

- The product MUST be installed vertically and the wiring terminals downwards.
- For the heat dissipation, distance of 10cm from 4 sides (up/down/right/left) and 5cm from the ventilation hole side should be kept

Packaging Information

POWER	400W
DIMENSION	182*118*50(LxWxH)
PACKING	188*123*53(LxWxH)
PCS/CTN	48pcs
CARTON SIZE	510*320*400(LxWxH)
WEIGHT	516g±10g/PCS

Temperature load curve

