

ZB1450S-550S

ZB1260S-450S


ZB1100S-380S

ZB700S-250S

单张式全自动手提袋制袋机（单张进纸连机放底卡）

Fully Automatic Sheet-feeding Paper Bag Making Machine

(Sheet Feeding, Bottom Card Inserting Inline)

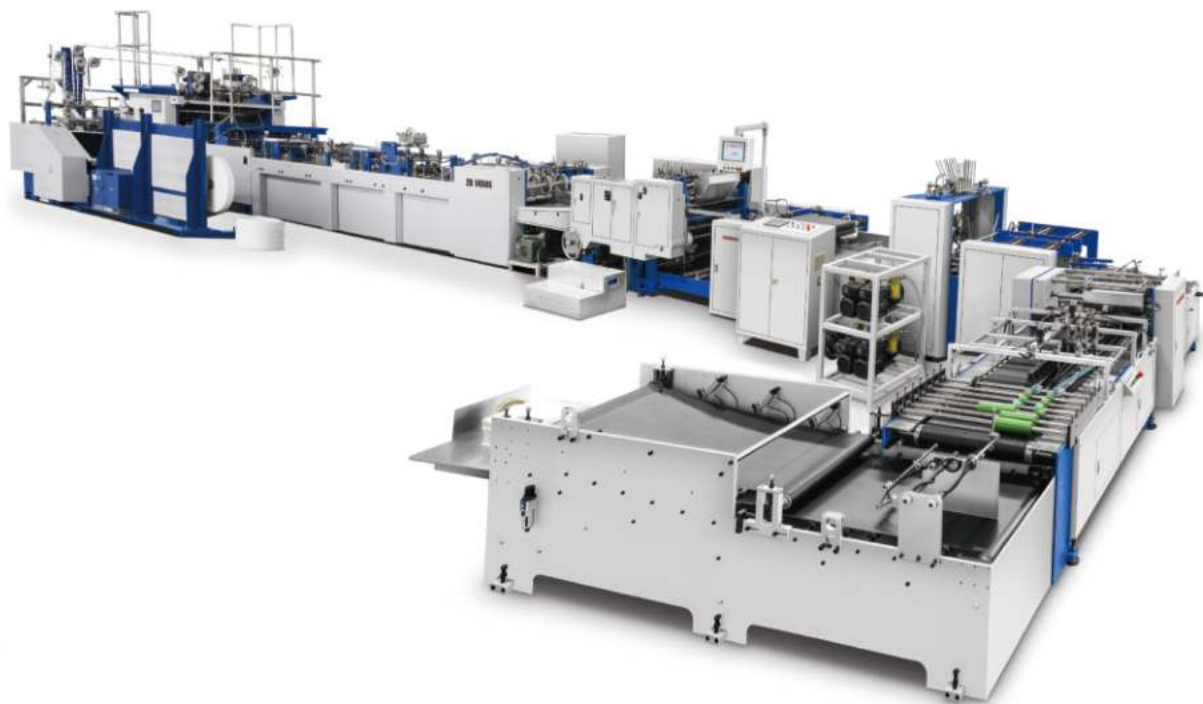

可选配功能

Option

整机全伺服

Full Servo Machine



折上口为嵌入式

Top folding Joint Type:

Insert Pasting



扁绳手挽

Flat Handle



3种袋口工艺

3 Bag Mouth Processes

单张 Sheet	进纸最大规格	Max.Sheet(LxW)	mm	1450X800	1450X740	1450X800	1260X600	1260X560	1260X600
	进纸最小规格	Min.Sheet(LxW)	mm	780X520	780X460	780X520	600X320	600X320	600X320
	纸张克重	Sheet Weight	g/m²	120-190	120-190	120-190	120-190	120-190	120-190
袋子 Bag	袋筒长度	Bag Tube Length	mm	460-740	460-740	460-740	280-560	320-560	280-560
	袋口反折宽度	Top Folding Depth	mm	40-60	——	40-60	40-60	——	40-60
	手把贴片克重	Handle Patch Weight	g/m²	100-190	100-190	100-200	100-190	100-190	100-200
	贴片纸卷直径	Handle Patch Roll Diameter	mm	Φ1000	Φ1000	Φ1000	Φ1000	Φ1000	Φ1000
	贴片纸卷宽度	Handle Patch Roll Width	mm	60-100	60-100	60-100	60-100	60-100	60-100
底卡 Bottom Cardboard	克重	Weight	g/m²	250-400	250-400	250-400	250-400	250-400	250-400
	宽度	Width	mm	94-244	94-244	94-244	64-174	64-174	64-174
	长度	Length	mm	254-544	254-544	254-544	214-444	214-444	214-444
设备 Machine	制袋速度	Speed		50-70bags/min			50-80bags/min		
	电压	Voltage	V	380			380		
	机器重量	Total Weight	T	29			27		
	装机/使用功率	Total/Production Power	kW	54.7/32.8			49/29.4		
	外形尺寸(长X宽X高)	Machine Size(LxWxH)	mm	23800X6500X3150			20700X6200X2950		

发明专利技术: 全伺服切断手挽

Invention Patent Technology: Full Servo Cutting Handles

本系列设备采用全伺服手挽分切,比传统纸袋机单日节省6-8公斤手挽料
生产速度相比提升 20% 以上
可定制整机智能全伺服(E型号)功能,大幅度节省换版时间,解决了小批量多品种纸袋的全自动生产行业难题。

The series of equipment adopts full servo handle cutting, which saves 6-8kg of handle raw materials per day than traditional paper bag making machine.
Equipment production speed is increased by more than 20%.
You can customize the entire machine with an intelligent full servo (E model) function, substantially saves size-changing time, and assisting in the fully automatic production industry challenge of diverse paper bags with small order quantities.

1450S-550S



1260S-450S



1100S-380S



700S-250S



3种袋口工艺

3 Bag Mouth Processes

单张 Sheet	进纸最大规格	Max.Sheet(LxW)	mm	1100X600	1100X560	1100X600	770X445	770X405	770X445
	进纸最小规格	Min.Sheet(LxW)	mm	520X320	520X320	520X320	480X265	480X225	480X265
	纸张克重	Sheet Weight	g/m²	120-190	120-190	120-190	120-190	120-190	120-190
袋子 Bag	袋筒长度	Bag Tube Length	mm	280-560	320-560	280-560	225-405	225-405	225-405
	袋口反折宽度	Top Folding Depth	mm	40-60	——	40-60	40-50	——	40-50
	手把贴片克重	Handle Patch Weight	g/m²	100-190	100-190	100-200	100-190	100-190	100-200
	贴片纸卷直径	Handle Patch Roll Diameter	mm	Φ1000	Φ1000	Φ1000	Φ1000	Φ1000	Φ1000
	贴片纸卷宽度	Handle Patch Roll Width	mm	60-100	60-100	60-100	60-80	60-80	60-80
底卡 Bottom Cardboard	克重	Weight	g/m²	250-400	250-400	250-400	250-400	250-400	250-400
	宽度	Width	mm	64-164	64-164	64-164	54-124	54-124	54-124
	长度	Length	mm	174-374	174-374	174-374	144-254	144-254	144-254
设备 Machine	制袋速度	Speed		50-80bags/min			50-80bags/min		
	电压	Voltage	V	380			380		
	机器重量	Total Weight	T	27			22		
	装机/使用功率	Total/Production Power	kW	49/29.4			49/29.4		
	外形尺寸(长X宽X高)	Machine Size(LxWxH)	mm	20700X6200X2950			20700X6100X2950		