




百搭通用铰链 One way hinge  
Two way hinge

CUP:45mm, 48mm, 52mm  
BASE:H0, H2, H4

产品介绍 product description

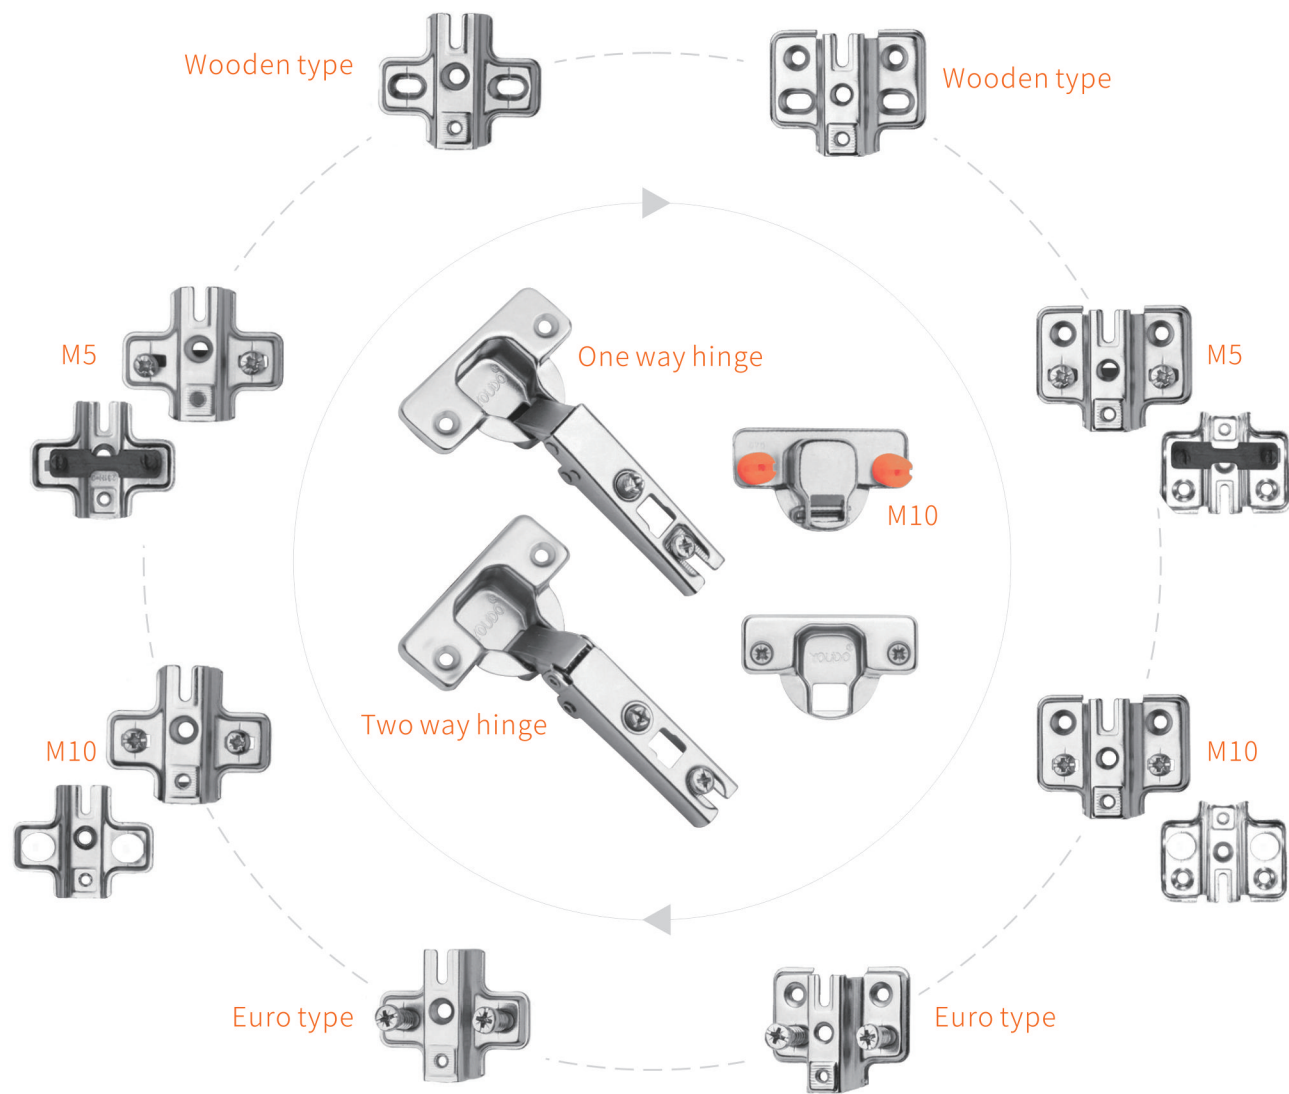

直臂 Full Overlay




中曲 Half Overlay




大曲 Inset

底座安装孔位与盖位表 Installation hole location




$H=14+K-D$

| D | K  | 3  | 4  | 5  | 6  | 7  |
|---|----|----|----|----|----|----|
| H | 0  | 17 | 18 | 19 | 20 | 21 |
| 2 | 15 | 16 | 17 | 18 | 19 |    |
| 4 | 13 | 14 | 15 | 16 | 17 |    |



$H=5+K-D$


| D | K | 3 | 4 | 5  | 6  | 7  |
|---|---|---|---|----|----|----|
| H | 0 | 8 | 9 | 10 | 11 | 12 |
| 2 | 6 | 7 | 8 | 9  | 10 |    |
| 4 | 4 | 5 | 6 | 7  | 8  |    |




$H=-2+K+A$

| D | K | 3  | 4  | 5  | 6  | 7  |
|---|---|----|----|----|----|----|
| H | 0 | -1 | -2 | -3 | -4 | -5 |
| 2 | 1 | 0  | -1 | -2 | -3 |    |
| 4 | 3 | 2  | 1  | 0  | -1 |    |


铰杯安装孔位尺寸 Installation hole location

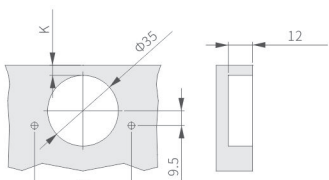

孔距:45mm

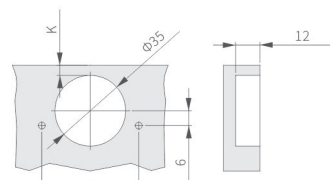

孔距:48mm

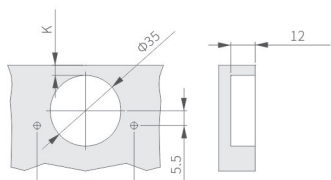

孔距:52mm

YD-261 二段力铰链

Two way hinge



开门角度:100°  
铰杯厚度:11.5mm  
铰杯直径:35mm  
面板(K)尺寸:3-7mm  
门可选用板厚度:14-24mm

Opening angle: 100°  
Thickness of hinge cup: 11.5mm  
Diameter of hinge cup: 35mm  
Door (K) dimension: 3-7mm  
Range for door thickness: 14-24mm