

# ➤ **Manual for S2800-16G**

**All gigabit ethernet switch**



## 01 Product introduction

### Product overview

**hasivo** independently developed S2800-16G all gigabit ethernet switch with simple and convenient installation and maintenance means and rich business characteristics, which helps users to create security high performance network. The product can be widely used in the field of data exchange such as home network, multimedia classroom, security monitoring, wireless network and so on.

### Port performance

- ◆ Provide 16\*10/100/1000M RJ45 ports which can realize line speed forwarding.
- ◆ Each port supports MDI/MDIX automatic flip and duplex / rate self negotiation.
- ◆ Support IEEE 802.3x full duplex flow control and backpressure half duplex flow control.

## 02 Spare parts list




Network Switch



AC power cable



User manual+Warranty Card



Rack hanger

## 03 Product display

Front



Indicator

Function switch

Downlink Port

Uplink Port

Back



Ground screw

AC Power

### Indicator definition:

Indicator	Status	Description
Power indicator: PWR	Green light is always on	Power on normal
	Always off	No power
LINK/ACT indicator: 1~16 [2 and 3 Line]	Light is on	The corresponding port works at 10/100M speed
	Light is flashing	The corresponding port has data transmission
	Always off	The corresponding port hasn't data transmission
1000M indicator: 1~16 [1 and 4 Line]	Light is on	The corresponding port works at 1000M speed

### Function:

Function identifier	Work mode	Description
N	Standard switching mode	All ports communicate freely, suitable for common data transmission environment
V	Port isolation mode	The downlink ports are isolated from each other, which is suitable for the use scenarios of connecting wireless AP, suppressing network storm and improving network performance
C	Flow control mode	Port flow balance control, prevent big data flow packet loss, ensure the efficient and stable operation of user network



## 04 Installation & Points of attention

### Checking before installation

1. Check whether the accessories are complete. If there is any omission, please contact us.
2. Check whether the power supply voltage is consistent with the working voltage of the switch, so as to avoid the equipment burning out due to high voltage.
3. Ensure that the installation position of the switch has certain ventilation and heat dissipation conditions.
4. Please keep the power off during installation to avoid potential safety hazards.
5. Please install the switch on a stable plane to avoid falling and damage.


### Install to desktop

1. Attach the four non slip rubber footmats that came with the device to the bottom four corners of the switch.
2. Place the switch on the horizontal desktop in the ventilation area.

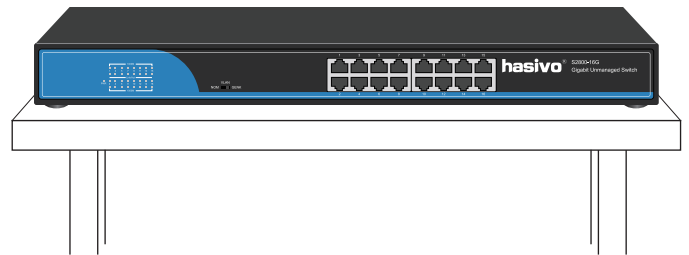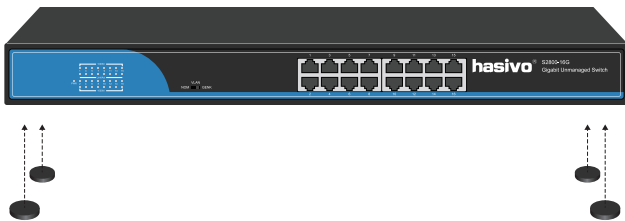


3. Insert the data cable

»»» Insert the data cable

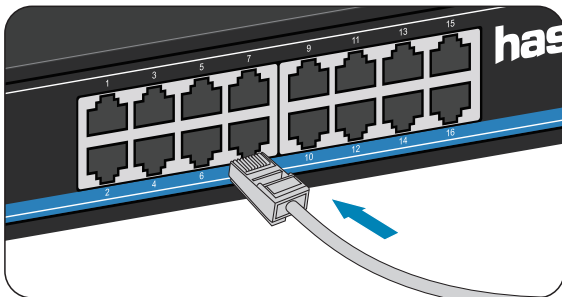


As shown in the figure, insert the crystal head of the data cable into the network port. When you hear a clear click, it indicates that the crystal head is successfully connected with the network port of the switch. Just plug in all the network cables of the network equipment in this way.

4. Connected the power

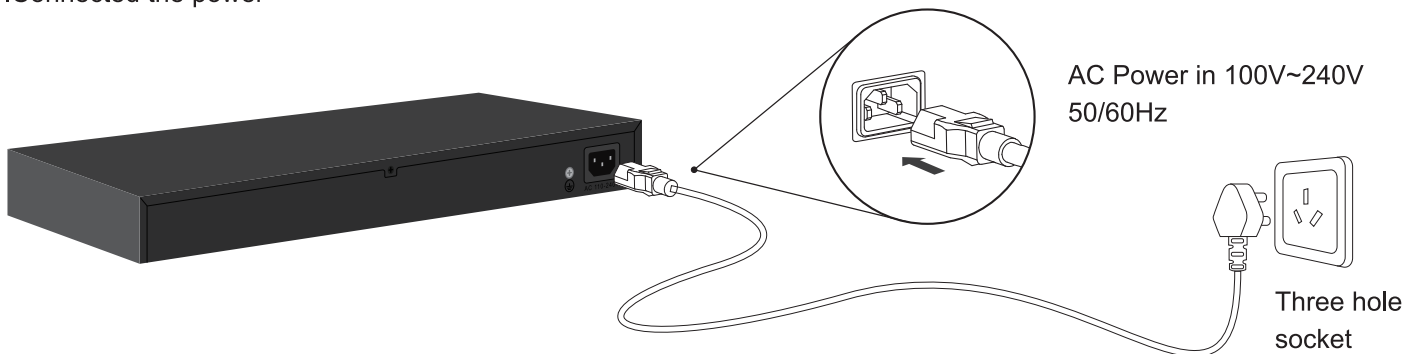


## Install to cabinet/Rack


1. install the rack lug attached to the equipment to both sides of the switch with screws

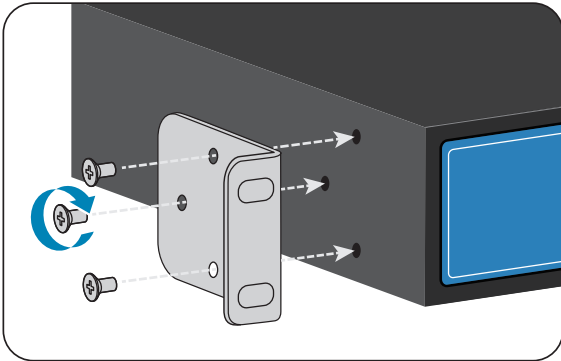


2. Install floating nut on cabinet / rack

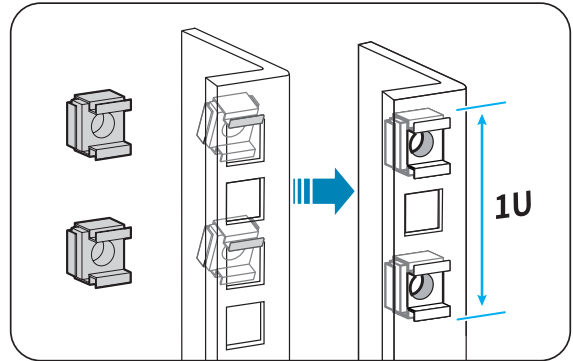

3. Put the switch installed with the lug into the cabinet and screw on the screw to complete the installation.

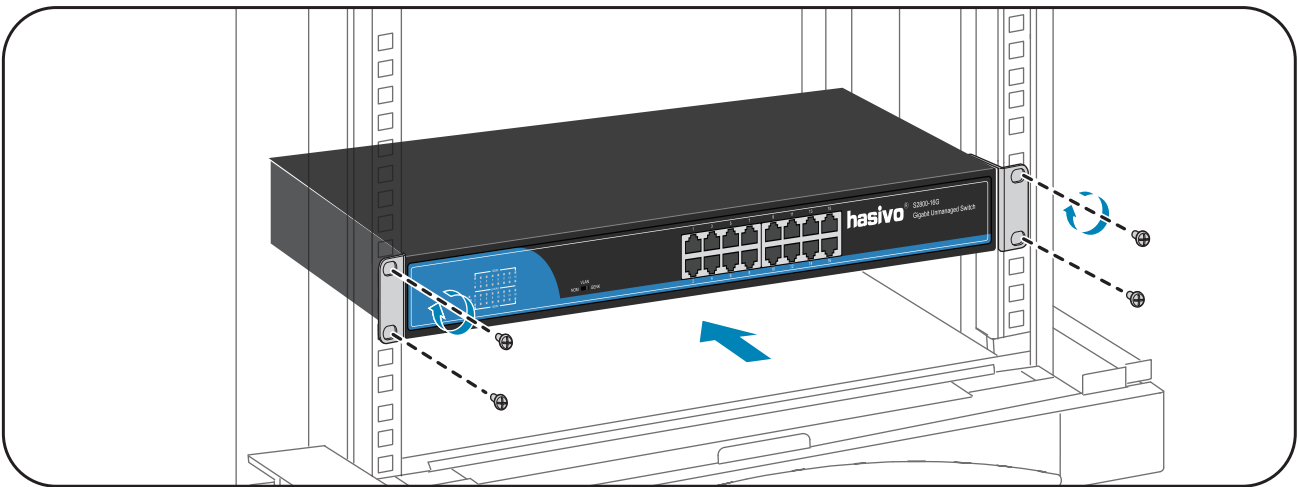


4. Connected the power

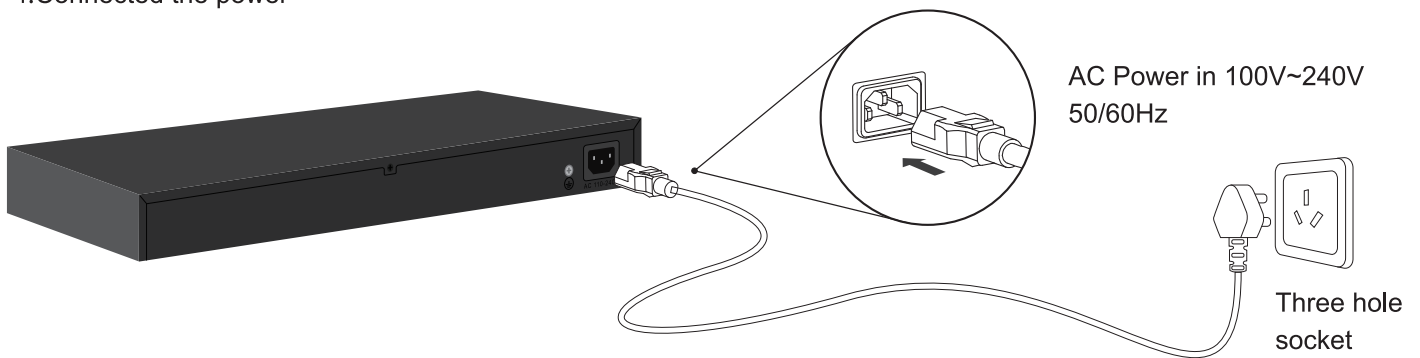

## Points of attention

1. Do not stack heavy objects on the switch to avoid danger.
2. In order to avoid the risk of electric shock, please do not open the machine box when the switch is working, even if it is not powered on, please contact us in case of any problem.
3. Before cleaning the switch, pull out the power plug of the switch. Do not wipe it with wet fabric or clean it with liquid.
4. If the power adapter is damaged, do not replace it with other power adapters. This switch should be equipped with original power adapter.

## 05 Application

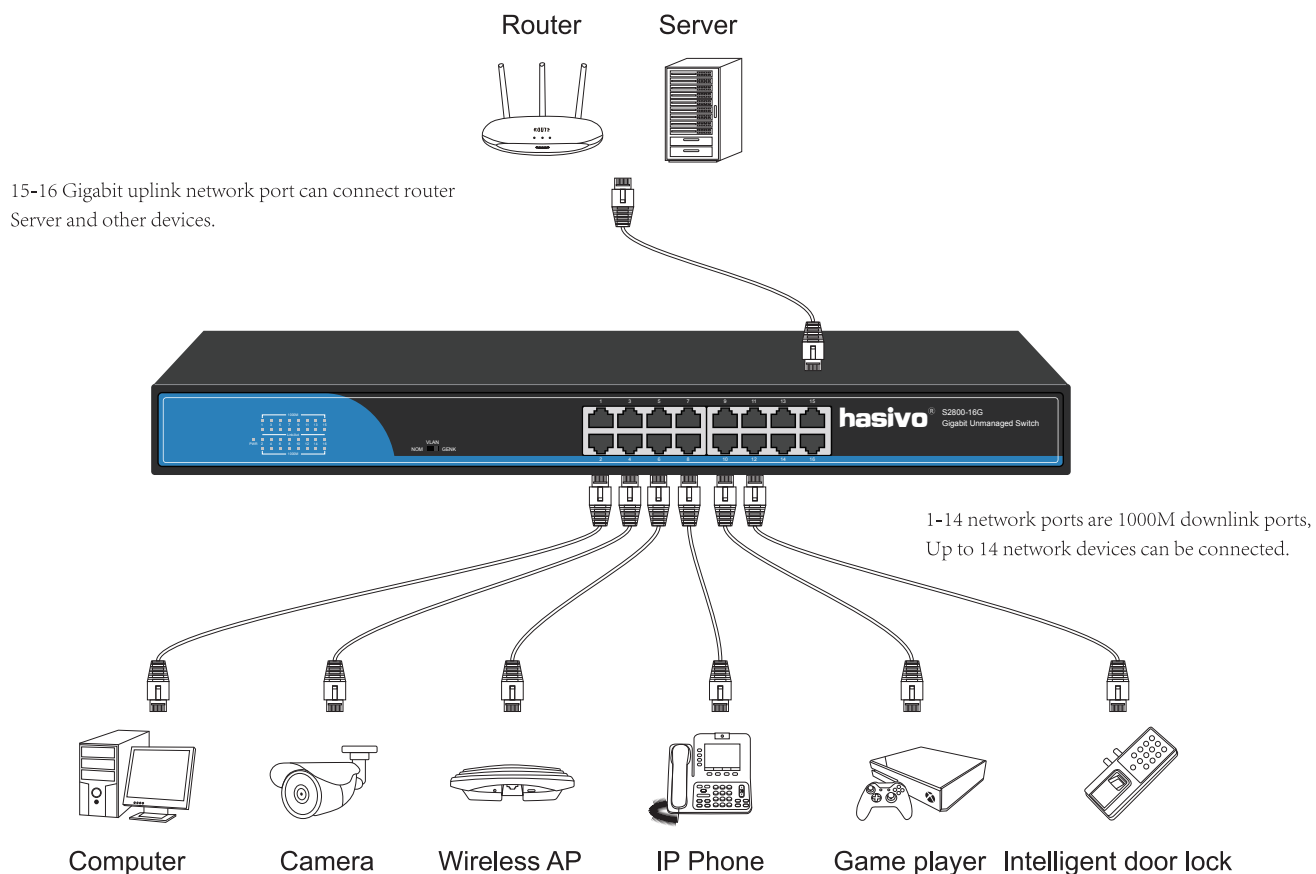

## 06 Common troubleshooting

- ⚠ The PWR indicator is not on after the power is connected → Check whether the power adapter and plug are connected correctly, whether the power cord is damaged, and whether the power adapter is damaged.
  - ⚠ Switch cannot communicate after power up → Check whether the switch indicator is on. If the indicator is off, the network cable is not connected. If the indicator is on, the communication fault is indicated.
  - ⚠ Switch network speed suddenly become very slow → Take off the plug and restart the switch.
- [If the above problems or other switch problems can not be solved, please contact us for technical support]

## 07 Product parameter

Model	S2800-16G
Product	Enterprise all Gigabit 16 ports Ethernet Switch
Fixed Port	16*10/100/1000Base-TX RJ45 port (Data)
Network Protocol	IEEE 802.3 IEEE 802.3i 10BASE-T IEEE 802.3u100BASE-TX IEEE 802.3ab1000BASE-T IEEE 802.3x IEEE 802.1q VLAN
Function	N_Standard normal; V_Port isolation; C_Flow Control mode
Port Specification	10/100/1000BaseT (X) Auto
Transmission Mode	Store and Forward (full wirespeed)
Bandwidth	56Gbps
Packet Forwarding	40.32Mpps
MAC Address	8K
Buffer	4.1M
Transmission Distance	10BASE-T: Cat3,4,5 UTP(≤250 meter) 100BASE-TX: Cat5 or later UTP(150 meter) 1000BASE-TX: Cat6 or later UTP(150 meter)
Watt	≤15W
LED Indicator	PWR:Power LED 1-16:(Link LED =10/100/1000M)
Power	Built-in Power AC: 100~240V 50-60Hz 1A
Operating Temperature/Humidity	-10~+55°C; 5%~90% RH Non coagulation
Storage Temperature/Humidity	-40~+75°C; 5%~95% RH Non coagulation
Product size/Packing size (L*W*H)	440mm*140mm*45mm 513mm*220mm*95mm
N.W/G.W (kg)	1.6kg/2.1kg
Installation	Rack-mount(optional machine hanger spare parts)
Lightning protection level	3KV 8/20us; IP30
Certificate	3C; CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Warranty	Whole device for 1 year(Accessories not included)



---

**Sichuan hasivo electronics CO.,LTD.**

Address: NO.5-2 Anping street, New District, Economic Development Zone, Meishan City,Sichuan Province,China.

Post code: 620010

Offical website: <http://www.hasivo.com>

©2013-2021 Sichuan hasivo electronics CO.,LTD. All rights reserved

After-sale service: 028-38288776

Technical service: 028-38119776