

LED Garden Light



Nova

JD-G030



Philips Lumileds 5050 Led
Philips/Meanwell/Inventronics driver

- Main material used in high strength aluminum die casting material, surface anti-aging electrostatic spray Processing, super resistance to corrosion.
- High transparent tempered glass cover, high strength impact resistance.
- Horizontal version angle adjustable: +15° ~ -15°
- Vertical version angle adjustable: +15° ~ -15°
- Input voltage: AC100-277V, 50/60Hz;
- 5-year warranty
- IP66, IK09;

CE CB

金典照明
GOLDEN CLASSIC

技术参数 Specification

产品型号	Product Code	JD-G030A	JD-G030B	JD-G030C
LED数量	LED Quantity	72pcs 3030/24pcs 5050	144pcs 3030/48pcs 5050	192pcs 3030/64pcs 5050
额定功率	Rate Power	30W	60W	100W
色温	Color Temperature	6500/4000/3000K	6500/4000/3000K	6500/4000/3000K
灯具光效	Luminous Flux	130-140lm/w	130-140lm/w	130-140lm/w
输入电压	Input Voltage	AC100-277V	AC100-277V	AC100-277V
频率	Frequency Range	50/60Hz	50/60Hz	50/60Hz
显色指数	Color Temperature	Ra75	Ra75	Ra75
工作环境温度	Temperature of working condition	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C
工作环境湿度	Humidity of working condition	20%-90%	20%-90%	20%-90%
LED 寿命	LED life time	100000H (L70B50)	100000H (L70B50)	100000H (L70B50)
防护等级	Protection Grade	IP66	IP66	IP66
安装管径	Installation Pipe Dia	Φ60mm	Φ60mm	Φ60mm
安装高度	Installation Height	3-5m	4-6m	7-9m
净重	Net Weight	6.1kg	6.5kg	7.9kg
毛重	Gross Weight	7.6kg	8kg	9.4kg
产品尺寸	Product Size	517x704x78mm	517x704x78mm	517x704x78mm
包装尺寸	Packing Size	540x630x130mm	540x630x130mm	540x630x130mm


注:包装尺寸为外尺寸

本表所示技术参数均在环境温度为25°C,湿度35%的实验室环境中测得。


Packing size is outer size of box

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

产品尺寸 Product Dimension

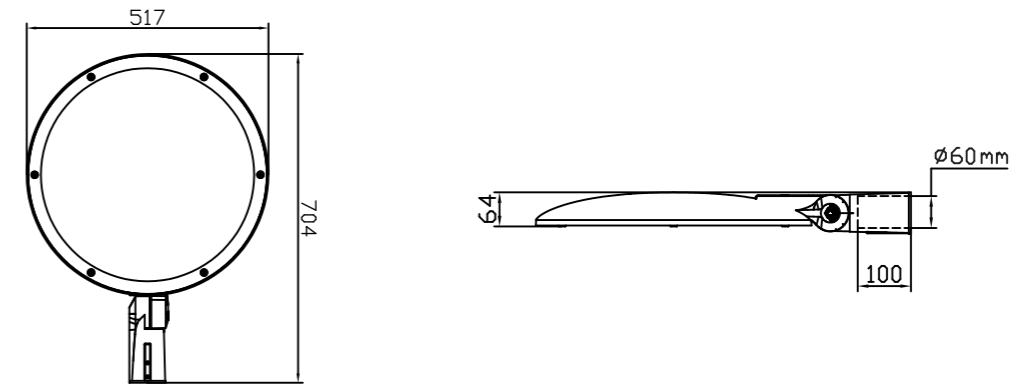

Light Distribution Curve

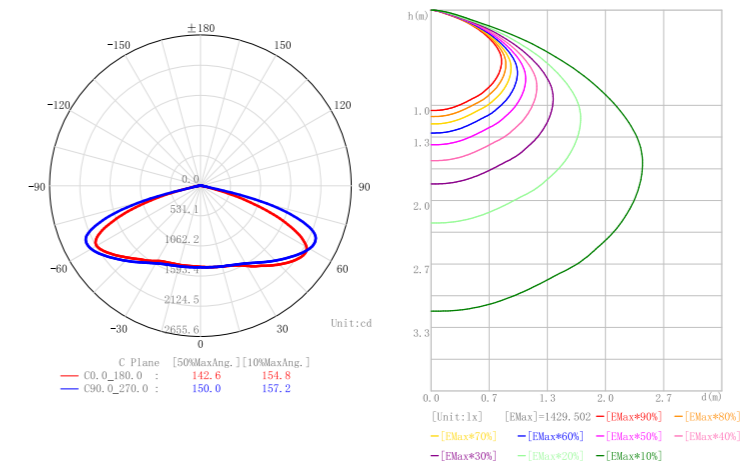

AC100-277V 输入电压 Input Voltage	Hz 50/60 频率范围 Frequency Range	PF >0.92 功率因数 Power Factor	<15% 总谐波失真 THD	CRI 75 显色指数 Color Rendering Index	-40~45°C 工作环境温度 Temperature of Working Condition	20~90% 工作环境湿度 Humidity of Working Condition	100000H (L70B50) 使用寿命 Life Time	IP66 防护等级 Protection Grade
-------------------------------------	--	-------------------------------------	----------------------	--	--	---	--	----------------------------------