


Nominal Diameter	Main Dimension (mm)									
	d	D	D1	D2	b	n-ød	L(F)	H	W	
mm										
15	95	65	45	16	4-ø14	130	192	120		
20	105	75	58	18	4-ø14	150	192	120		
25	115	85	68	18	4-ø14	160	202	140		
32	140	100	78	18	4-ø18	180	202	140		
40	150	110	88	18	4-ø18	200	226	160		
50	165	125	102	20	4-ø18	230	230	180		
65	185	145	122	22	8-ø18	290	245	180		
80	200	160	138	24	8-ø18	310	270	250		
100	235	190	162	24	8-ø22	350	345	300		
125	270	220	188	26	8-ø26	400	382	350		
150	300	250	218	28	8-ø26	480	434	350		
200	375	320	285	34	12-ø30	600	545	450		
250	450	385	345	38	12-ø33	730	724	520		
300	500	450	410	42	16-ø33	850	810	520		



15	Bonnet Nut	ASTM A194 2H
14	Bonnet bolt	ASTM A193 B7
13	Handwheel Nut	Carbon Steel
12	Hand Wheel	Carbon Steel
11	Stem Nut	Copper Alloy
10	Stop Plank	Carbon Steel
9	Gland	Carbon Steel
8	Stem Packing	Graphite
7	Bonnet	ASTM A216 WCB
6	Stem	ASTM A182 F6a
5	Gasket	Graphite+SS
4	Bellows	SS304
3	Disc Pin	ASTM A276 420
2	Disc	ASTM A105+13Cr
1	Body	A216 WCB+13Cr
NO	PART NAME	MATERIAL

BELLOW GLOBE VALVES PN40bar	
Design and Manufacture	DIN 3356
Face to Face Dimensions	DIN 3202 F1
Flanger Ends Dimensions	DIN 2545
Pressure Test	DIN 3230

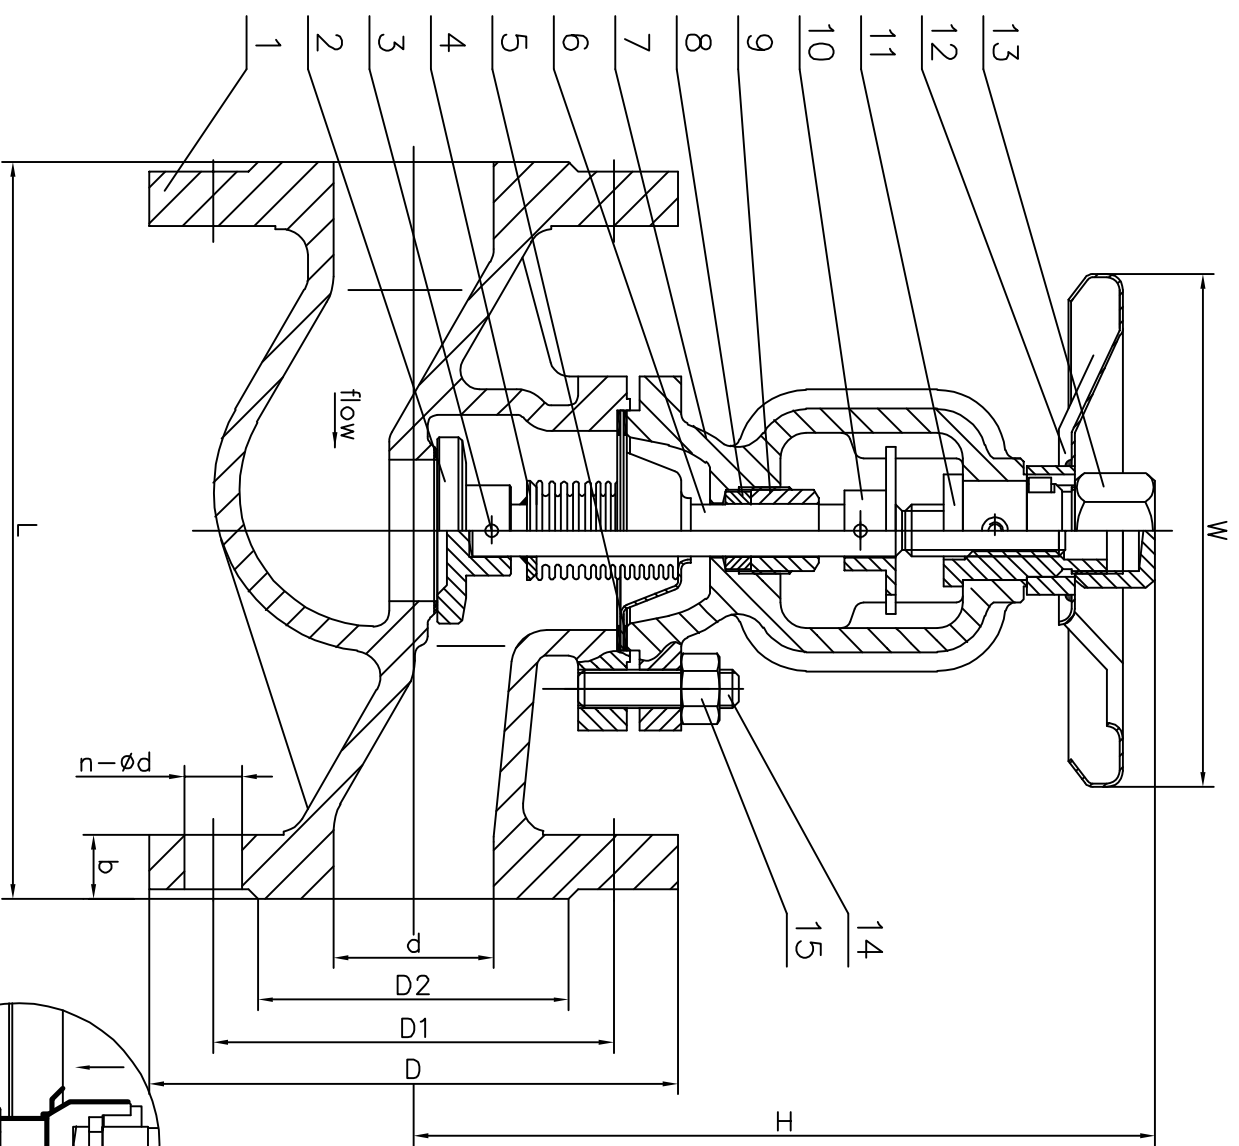