



Nominal Diameter	Main Dimension (mm)									
	d	D	D1	D2	b	n- ϕ d	L(F)	H	W	
mm										
15	15	95	65	45	16	4- ϕ 14	130	178	120	
20	20	105	75	58	18	4- ϕ 14	150	178	120	
25	25	115	85	68	18	4- ϕ 14	160	196	140	
32	32	140	100	78	18	4- ϕ 18	180	196	140	
40	40	150	110	88	18	4- ϕ 18	200	230	160	
50	50	165	125	102	20	4- ϕ 18	230	236	180	
65	65	185	145	122	22	8- ϕ 18	290	268	180	
80	80	200	160	138	24	8- ϕ 18	310	306	250	
100	100	235	190	162	24	8- ϕ 22	350	361	300	
125	125	270	220	188	26	8- ϕ 26	400	403	350	
150	150	300	250	218	28	8- ϕ 26	460	468	350	
200	200	375	320	285	34	12- ϕ 30	600	589	450	
250	250	450	385	345	38	12- ϕ 33	730	717	520	
300	300	515	450	410	42	16- ϕ 33	850	835	520	

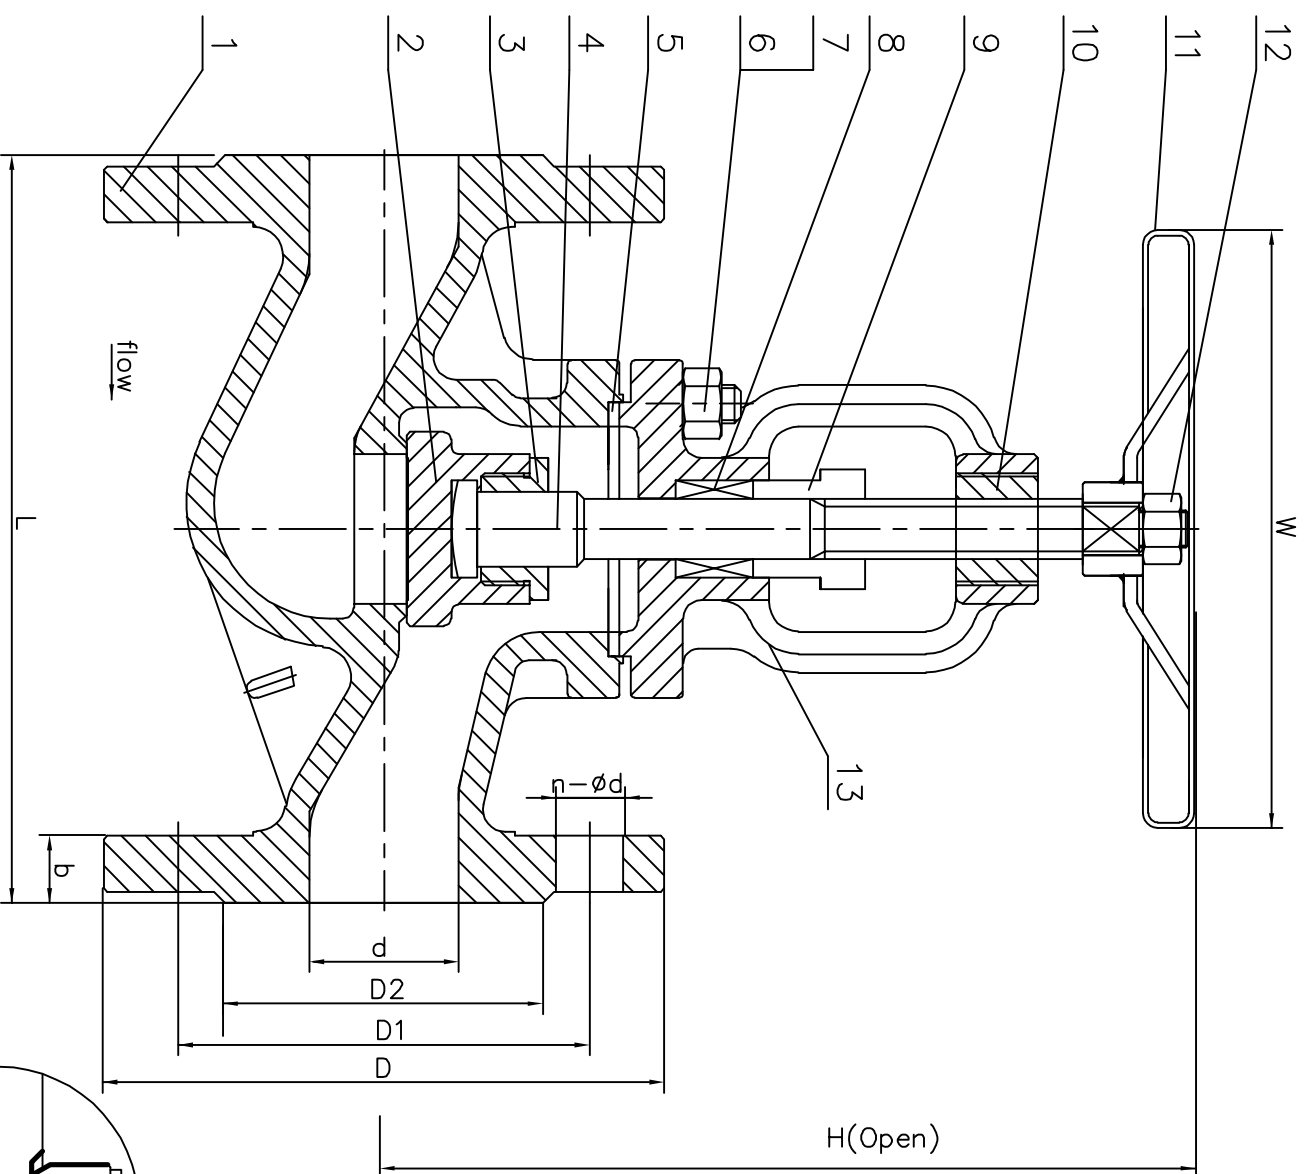

13	Bonnet	ASTM A216 WCB
12	Nut	ASTM A194 2H
11	Hand Wheel	Carbon Steel
10	Stem Nut	Copper Alloy
9	Gland	A216 WCB
8	Stem Packing	Graphite
7	Bonnet Nut	ASTM A194 2H
6	Bonnet bolt	ASTM A193 B7
5	Gasket	Graphite+304
4	Stem	ASTM A182 F6a
3	Disc Cover	ASTM A105
2	Disc	ASTM A105+13Cr
1	Body	A216 WCB+13Cr
NO	PART NAME	MATERIAL

GLOBE VALVES PN40bar	
Design and Manufacture	DIN 3356
Face to Face Dimensions	DIN 3202 F1
Flanger Ends Dimensions	DIN 2545
Pressure Test	DIN 3230



from: kevin email: cqwzhqp@126.com
msn: cqwzhqp@live.cn