


MODEL: HC-125GF2

440V | 1800rpm | 60Hz

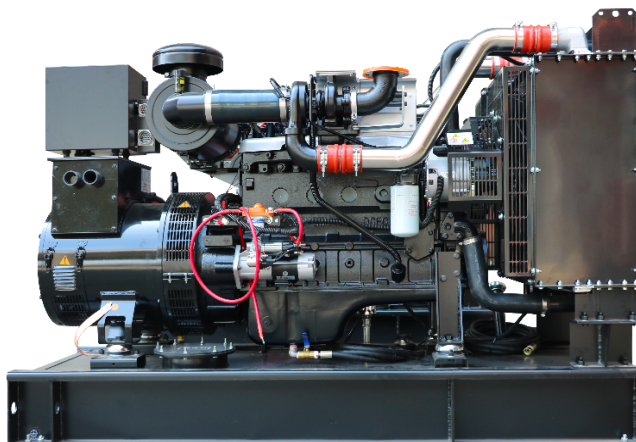

ESP Standby Power	145kVA	PRP Prime Power	130kVA
ENGINE	DCEC Cummins	ALTERNATOR	STAMFORD
	6BTA5.9-G2		UCI274D1

GENERAL FEATURES

Engine: DCEC Cummins 6BTA5.9-G2	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: HC-125GF2**440V | 1800rpm | 60Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	174	116kW/145kVA	104kW/130kVA
460/266	60	3	0.8	182	116kW/145kVA	104kW/130kVA
440/254	60	3	0.8	190	116kW/145kVA	104kW/130kVA
416/240	60	3	0.8	201	116kW/145kVA	104kW/130kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

MODEL: HC-125GF2**440V | 1800rpm | 60Hz**

ENGINE SPECIFICATION

Manufacturer / Model	DCEC Cummins 6BTA5.9-G2
----------------------	-------------------------

Air intake system	Turbocharged, Water/Air Cooling
-------------------	---------------------------------

Fuel system	PB type fuel pump
-------------	-------------------

Cylinder arrangement	6 in line
----------------------	-----------

Displacement	5.9L
--------------	------

Bore and stroke	102×120 mm
-----------------	------------

Compression ratio	17.3
-------------------	------

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	132kW
-----------------------------------	-------

Governor type	Electronic
---------------	------------

Exhaust System

Exhaust gas flow	24.4 m ³ /min
------------------	--------------------------

Exhaust temperature	580°C
---------------------	-------

Max back pressure	10kPa
-------------------	-------

Air Intake System

Max intake restriction	6.35kPa
------------------------	---------

Combustion air flow	8.5 m ³ /min
---------------------	-------------------------

Air flow required for radiator	228 m ³ /min
--------------------------------	-------------------------

Comprehensive Solutions For

POWER GENERATION

MODEL: HC-125GF2**440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	211g/kWh	29.9L/h
Fuel consumption @ 75% (Prime Power) Load	212g/kWh	22.7L/h
Fuel consumption @ 50% (Prime Power) Load	223g/kWh	16.4L/h

Oil System

Total oil capacity	16.4L
Oil sump capacity	12.3~14.2L

Cooling System

Coolant capacity	26L
Max water temperature	104°C

MODEL: HC-125GF2**440V | 1800rpm | 60Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	137.5kVA
Alternator Efficiency	90.8%

MODEL: HC-125GF2

440V | 1800rpm | 60Hz

GENERATING SET DATA

Related range of voltage setting	≥±5%
Steady-state voltage deviation	≤±1%
Transient voltage deviation (100 % sudden power decrease)	≤+25%
Transient voltage deviation (sudden power increase)	≤-20%
Voltage recovery time (100 % sudden power decrease)	≤6S
Voltage recovery time (sudden power increase)	≤6S
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	≤1.5%
Transient frequency deviation (100 % sudden power decrease)	≤+12%
Transient frequency deviation (sudden power increase)	≤-10%
Frequency recovery time (100 % sudden power decrease)	≤5S
Frequency recovery time (sudden power increase)	≤5S

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
Base fuel tank		

MODEL: HC-125GF2

440V | 1800rpm | 60Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT



Standard Configuration (open type)

Overall Dimensions: 2200×900×1700 mm

Weight: 1330 kg



Soundproof Type

Overall Dimensions: 3230×1170×1800 mm

Weight: 2100 kg

Specifications are subject to change without notice.