


**MODEL: HC-34GF-60** **440V | 1800rpm | 60Hz**

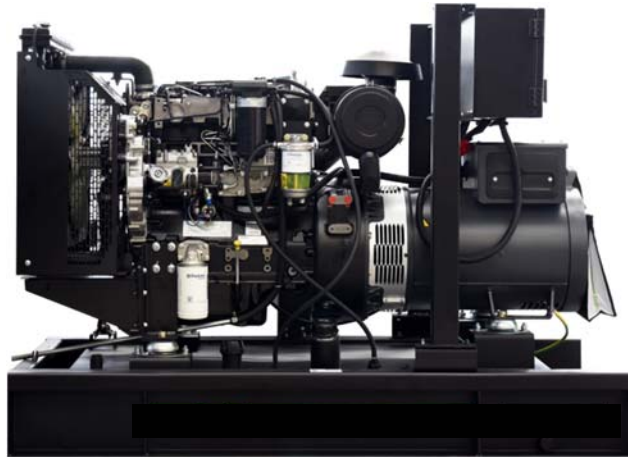

<b>ESP</b> Standby Power	<b>38kVA</b>	<b>PRP</b> Prime Power	<b>35kVA</b>
<b>ENGINE</b>	<b>Perkins</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>1103A-33G</b>		<b>S1L2-J1</b>

## GENERAL FEATURES

Engine: Perkins 1103A-33G	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

**MODEL: HC-34GF-60****440V | 1800rpm | 60Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF ( COS $\Phi$ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	46	30kW/38kVA	28kW/35kVA
460/266	60	3	0.8	48	30kW/38kVA	28kW/35kVA
440/254	60	3	0.8	50	30kW/38kVA	28kW/35kVA
416/240	60	3	0.8	53	30kW/38kVA	28kW/35kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

HiChai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: One year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HiChai Power or distributors in your location.

**MODEL: HC-34GF-60****440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 1103A-33G
Air intake system	Turbocharged
Fuel system	Direct Injection
Cylinder arrangement	3 in line
Displacement	3.3L
Bore and stroke	105×127 mm
Compression ratio	19.25
Rated speed	1800rpm
Max. Standby power at rated speed	36.5kW
Governor type	Mechanical

**Exhaust System**

Exhaust gas flow	6.6 m <sup>3</sup> /min
Exhaust temperature	530°C
Max back pressure	10kPa

**Air Intake System**

Max intake restriction	6.5kPa
Combustion air flow	2.57 m <sup>3</sup> /min
Air flow required for radiator	70 m <sup>3</sup> /min

**MODEL: HC-34GF-60****440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	211 g/kWh	8.1 L/h
Fuel consumption @ 75% (Prime Power) Load	216 g/kWh	6.2 L/h
Fuel consumption @ 50% (Prime Power) Load	235.4 g/kWh	4.6 L/h

**Oil System**

Total oil capacity	8.3L
Oil sump capacity	6.2-7.8L
Oil consumption at full load as a % of fuel consumption	0.15%

**Cooling System**

Coolant capacity	10.2L
Max water temperature	110°C

**MODEL: HC-34GF-60****440V | 1800rpm | 60Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	39.2kVA
Alternator Efficiency	88.8%

**MODEL: HC-34GF-60**

**440V | 1800rpm | 60Hz**

### GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

### STANDARD FEATURES


Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
Base fuel tank		

**MODEL: HC-34GF-60** **440V | 1800rpm | 60Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

**DIMENSIONS & WEIGHT**

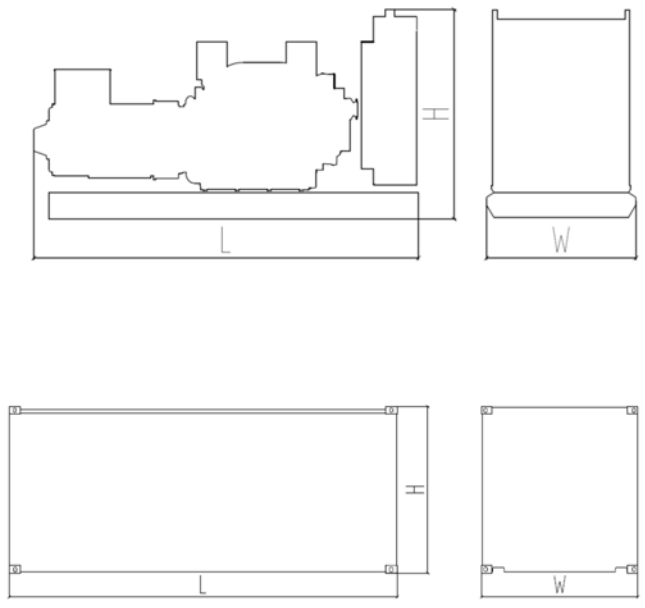

Standard Configuration (open type)
Overall Dimensions: 1760×760×1380 mm
Weight: 850kg
Soundproof Type
Overall Dimensions: 2290×1060×1680 mm
Weight: 1250kg

Specifications are subject to change without notice.