


MODEL: HC-660GF **400V | 1500rpm | 50Hz**

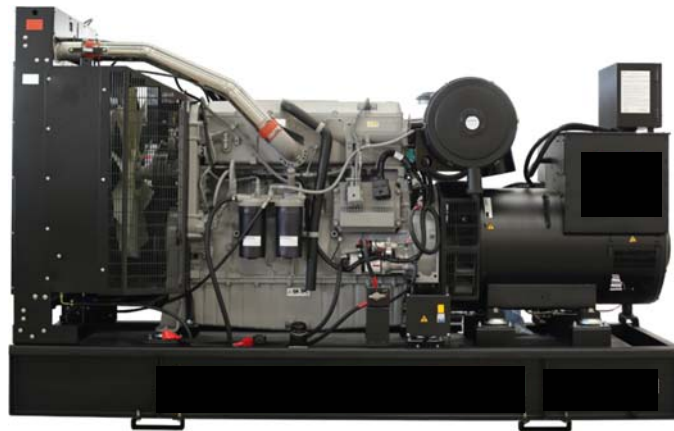

ESP Standby Power	660 kVA	PRP Prime Power	600 kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	2806C-E18TAG1A		S5L1D-E41

GENERAL FEATURES

Engine: Perkins 2806C-E18TAG1A	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual



MODEL: HC-660GF **400V | 1500rpm | 50Hz**

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	866	528kW/660kVA	480kW/600kVA
415/240	50	3	0.8	918	528kW/660kVA	480kW/600kVA
400/230	50	3	0.8	953	528kW/660kVA	480kW/600kVA
380/220	50	3	0.8	1003	528kW/660kVA	480kW/600kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

HiChai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: One year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HiChai Power or distributors in your location.

MODEL:HC-660GF**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 2806C-E18TAG1A
Air intake system	Turbocharged, air to air charge cooling
Fuel system	MEUI
Cylinder arrangement	6 in line
Displacement	18.13L
Bore and stroke	145×183 mm
Compression ratio	14.5:1
Rated speed	1500rpm
Max. Standby power at rated speed	583.5KW
Governor type	Electronic

Exhaust System

Exhaust gas flow	115 m ³ /min
Exhaust temperature	565°C
Max back pressure	6.9kPa

Air Intake System

Max intake restriction	6.35kPa
Combustion air flow	41 m ³ /min
Air flow required for radiator	702 m ³ /min

MODEL: HC-660GF**400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	216 g/kWh	131 L/h
Fuel consumption @ 75% (Prime Power) Load	214 g/kWh	97 L/h
Fuel consumption @ 50% (Prime Power) Load	212 g/kWh	65 L/h

Oil System

Total oil capacity	62L
Oil consumption ratio based on fuel consumption data	0.1%(As a percentage of fuel consumption)
Oil sump capacity	45~53L

Cooling System

Coolant capacity	61L
Max water temperature	103°C

MODEL: HC-660GF**400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	625kVA
Alternator Efficiency	94.8%

MODEL: HC-660GF

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES


Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB

MODEL: HC-660GF **400V | 1500rpm | 50Hz**

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

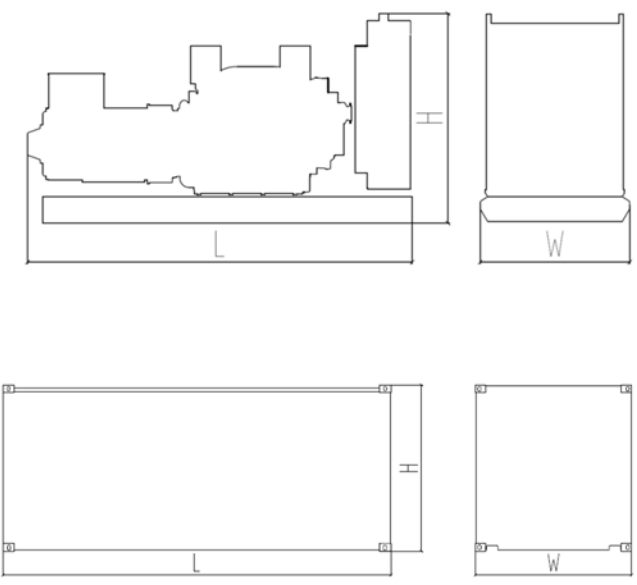

Standard Configuration (open type)
Overall Dimensions: 3600×1400×2100 mm
Weight: 4500 kg
Soundproof Type
Overall Dimensions: 5030×1660×2550 mm
Weight: 6500 kg

Specifications are subject to change without notice.