


DERSONN[®]
Lighting your life

30×120

Revolution LED Panel Light

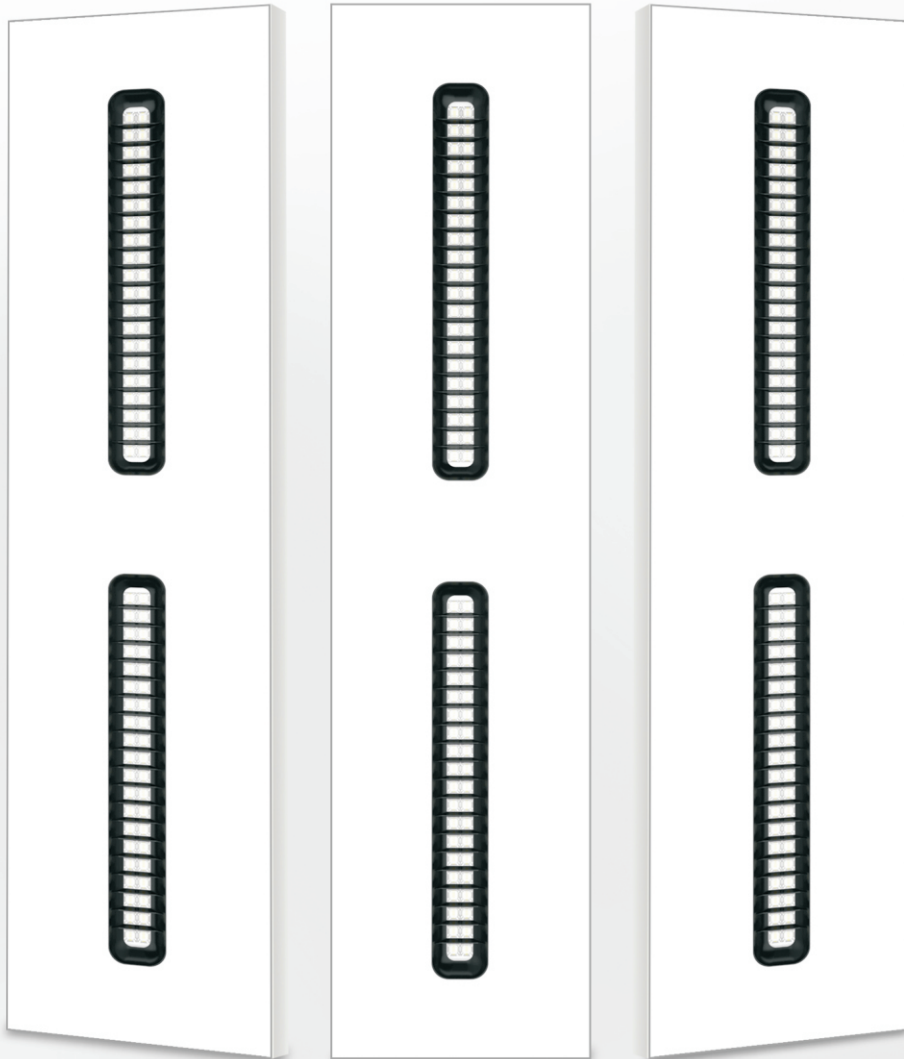

Ultra Low Glare LED Panel Luminaire

The Revolution panel is engineered for a wide range of applications and boasts ultra high efficiency while being classed as a low glare product. It utilises premium optic and reflector technology with integrated structure, enabling a superior life product. High quality ,high efficiency , perfect replacements for Grille lamp and normal led panel light.

Product Specification

| Model Name | 30×120 20W Panel 2 Rows |
|----------------------------|---------------------------------------|
| Net Power (Watts) | 20W |
| System Efficacy | Up to 130lm/W |
| Total Lumen Flux (Lm) | 2600lm |
| LED Brand | Bridgelux 2835 |
| CCT | 3000K ,4000K |
| CCT Binning(SDCM) | 3-Step |
| Color Rendering Index(CRI) | 90 |
| Optic Options | 90Degree |
| Reflector Options | White or black |
| Unified Glare Rating (UGR) | <16 |
| IP Rating | IP54 |
| IK Rating | NA |
| LED Lifespan(TM-21-10K) | 50000hours |
| Driver | Outside built (Osram HEP etc) |
| Power Factor | 0.95 Typical |
| Non-dim or Dimmable | Yes (Option) |
| DALI&0-10V &Intelligent | Yes (Option) |
| Certificate | SAA RCM CE ROHS ENEC TUV UKCA |
| Warranty | 6years |
| Lamp Body Material | Iron ,PC, Aluminum |
| Installation Way | Suspension Kit,Recessed,Surface mount |
| Installation Parts | Yes (Option) |
| Operating Temperature | -20℃ ~ +50℃ |
| Dimensions(mm) | 295×1195×34.8 |

Models (Sku Code Example)

DSRP - 20W - 4K + F90 295x1195 -

| Model | Power | CCT | Beam | Size | Add Ons |
|-------|------------------------|------------------|------------------|--|----------------------------|
| DSRP | 20W 20W Total Power | 4K 4000K Pure | F90 90 ° Lens | 1195X595 Full Panel 595X595 Square Panel 1195X295 Rectangle Panel | NA NA Options Currently |

Dimensions

