


设计和制造/Design & Manufacturing: GB/T 12237  
 结构长度/Face to Face: JB 1686  
 连接尺寸/Connection Dimensions: JB/T 79  
 检验与试验/Test: GB/T 26480

性能规范/Performance Specification

公称压力/Nominal Pressure	PN16	试验介质/Test Medium	水/Water
壳体试验/Shell Test	2.4		
密封试验/Seal Test	1.76		
上密封试验/Back Seal Test	—		
适用温度/Suitable Temperature	-29~150°C	MPa	气/Air
适用介质/Suitable Media	水、油、气/W,O,G		

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

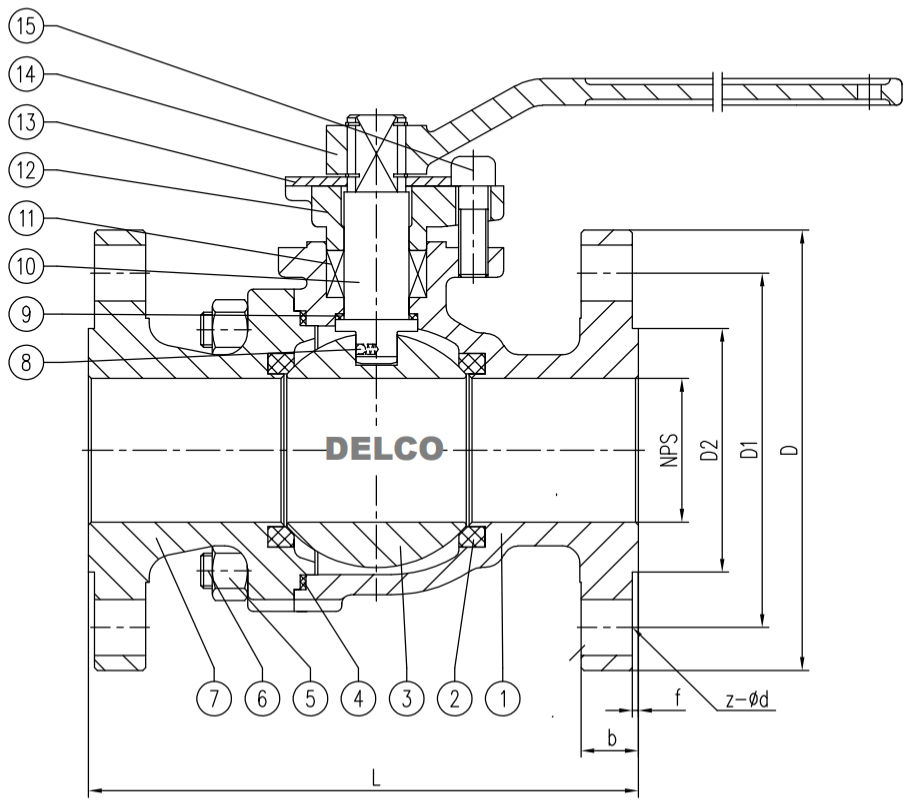

65	222	180	145	120	3	18	4-ø18
50	203	160	125	100	3	16	4-ø18
40	180	145	110	85	3	16	4-ø18
32	165	135	100	78	2	16	4-ø18
DN	L	D	D1	D2	f	b	z-ød

15	螺钉/Screw	ASTM A193 B7
14	手柄/Lever	ASTM A216 WCB
13	定位片/Stopper	ASTM A29 1025+Zn
12	填料压盖/Packing Gland	ASTM A216 WCB
11	填料/Packing	柔性石墨/Flexible Graphite
10	阀杆/Stem	ASTM A182 F6a
9	止推垫/Thrust Washer	PTFE
8	防静电装置/Anti-static Device	SS304
7	阀盖/Bonnet	ASTM A216 WCB
6	螺栓/Bolts	ASTM A193 B7
5	螺母/Nuts	ASTM A194 2H
4	垫片/Gasket	SS304+石墨/Graphite
3	球体/Ball	ASTM A105+ENP
2	阀座/Seat	PTFE
1	阀体/Body	ASTM A216 WCB

序号/No.	名称/Name	材料/Material
<p>TOLERANCE UNLESS OTHERWISE SPECIFIED                  DECIMALS: .0 ± .1                  .00 ± .01                  .000 ± .005                  ANGLES: MACH. ±1°00'                  FORMED ±2°                  FRACTIONS: ±1/16"</p>		
<p><b>DELCO VALVE CO.,LTD</b></p>		
<p>TITLE                  Flange Ball Valve PN16</p>		
APPROVED BY BOND	FSCM:	DWG NO.
CHECKED BY JULIA		REV A
DRAWING BY C L	SIZE mm	SCALE 1:1
	SHEET	SHEET 1 OF 1