

Terminal Load

954XXX7V32

HILINKS

- Frequency Range DC-4000 MHz
- Low PIM < -160dBc
- High reliability
- Suitable for indoor and outdoor applications
- Wall mounting

Technical Data

Electrical Specifications

Type No.	N Female	95444077V32
	N Male	95444087V32
	4.3-10 Female	95444097V32
	4.3-10 Male	95444107V32
	7-16 Female	95444117V32
	7-16 Male	95444127V32
Input Power (W)	25	
Frequency Range (MHz)	DC-4000	
Return Loss (dB)	≥19	
Intermodulation (3rd order, dBc)	≤-160@2x37dBm	
Impedance (Ω)	50	


Mechanical Specifications

Dimensions, HxWxD (excluding connectors and mounting bracket) (mm)	176x145x47.5	
Weight (including connectors and mounting bracket) (kg)	N Female/ Male	1.9
	4.3-10 Female/ Male	1.9
	7-16 Female/ Male	2.0
Packing Size(mm)	280x215x125	
Color	Light Gray (Customized)	
Mounting	Wall mounting	

Environmental Specifications

Operational Temperature (°C)	-40 to +65
Operational Humidity (%)	≤ 95
Ingress Protection Class	IP65 (Indoor and Outdoor)

Outline Drawing

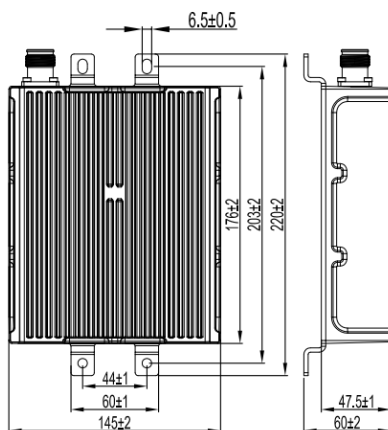

25 W

