Instruction Manual

SELF-PROPELLED ELECTRIC LIFT TABLE

Model: ESSW Series



Note: Owner/Operator must read and understand this instruction manual before using the lift table.

SELF-PROPELLED ELECTRIC LIFT TABLE

Model **ESSW50**

Instruction Manual

READ THIS OPERATION MANUAL COMPLETELY BEFORE USING.THOROUGHLY UNDERSTAND AND FOLLOW ALL SAFETY INSTRUCTIONS.IF THIS IS LOST, PLEASE CONTACT YOUR LOCAL SUPPLIER FOR A NEW COPY.IF THE WARNING/CAUTION DECAL ON THE UNIT IS LOST, PLEASE CONTACT YOUR LOCAL SUPPLIER FOR A NEW COPY.

Note: On this manual, WARNING means the danger which can lead death or serious injury. CAUTION means the danger which can lead slight injury or property damage.



- Never LIFT & LOWER the self-proplled electric lift table when Driving
- Only be driven when lift table platform at the lowest position.

1. Operation Safety Regulations

1.1 The Operator Requirements

This self-propelled lift table must be operated by a trained person who can demonstrate moving and operating the lift table to the user and can instruct vividly the user how to operate.

1.2 Rights, Obligations and Responsibilities of the Operator

The operator must fully understand his rights and obligations and has received the training of the self-propelled electric lift table operation. At the same time, the operator must master the related descriptions in the Instructions Manual. In the operation of walking control truck, the operator should wear safety boots.

1.3 Forbidden use by unauthorized persons

During operation, the operator must be responsible for the truck and prevent unauthorized persons in driving or operating the truck. The self-propelled electric lift table is strictly forbidden to lift or carry persons.

1.4 Failure and fault

In case of any failure or fault, please notify the administrator immediately. In case that the self-propelled electric lift table cannot work safely (such as wheel worn-out or brake fault), please stop using the lift table until they are properly repaired.

1.5 Repair

Without professional training and specific authorization, the operator is forbidden to repair or change any part of the truck. Any change of installation position of switches and safety devices is strictly forbidden by the operator to avoid efficiency decrease of the lift table.

All spare parts from original manufacturer are qualified by Quality Assurance Authorities. To ensure the safety and reliability of product operation, only spare parts from manufacturer can be applied. The parts replaced, including oils and fuels, must be disposed according to related environmental protection regulations.

1.6 Danger area

Danger area refers to the area where the lift table or its lifting device (such as fork or attachment) is working or lifting, which brings potential dangerous factors to persons or the area for load transportation. Generally, the range of danger area extends to the point of load lowering or truck attachment lowering.

Unauthorized persons must be kept away from danger area.

1.7 Working in hazardous environments

A self-propelled electric lift table operating in an area where there is a risk, or in any other high-risk area, should be specially equipped for the purpose.

1.8 Safety devices and warning signs

Enough importance should be attached to safety devices, warning signs and warning notices introduced above in Instructions Manual.

1.9 Driving in public areas

The electric lift table should not be driven on public roads outside a specific area.

1.10 Distance between vehicles

Remember that the lift table in front of you may brake suddenly therefore keep a reasonable distance.

1.11 Operation management

Driving speed must be applicable for local conditions. Low speed is requested for curve driving, narrow aisle passing, swing door passing or driving in blocked field. The operator must be capable to measure the braking distance to front area by sight and control the lift table continuously. Sudden brake (except in emergency), quick U-turn and overtaking in a blocked field are prohibited.

1.12 Visibility

The operator must focus on the driving direction to ensure clear sight for the road conditions ahead. In case the carried cargo interrupts the sight, reverse

driving is requested. If it doesn't help in this way, there must be another person walking ahead of lift table to give guidance and warning.

1.13 Passing a slope

The permitted slope in a narrow aisle for lift table passing must be clean and anti-slip. Driving on slops stipulated in technical specifications (instructions manual) is permitted. The carried cargo must face to upward direction of slope. U-turning or parking this lift table on a slope is prohibited. On passing a slope, driving is requested at low speed. At the same time, the operator must be always prepared to brake and stop.

1.14 Floor Load

It is advisable to carefully check notices and directions about the maximum floor load or maximum wheel pressure to ensure that this is not exceeded.

1.15Transports

The self-propelled electric lift table will only be driven with the height of lift table platform to the lowest position except when placing or removing a load.

1.16 Load characteristics

The cargo should be carried correctly, safely and reliably. Carrying a cargo with stacking-height exceeding top of platform or protection shield is strictly forbidden.

2. DAILY INSPECTION

Daily inspection is effective to find the malfunction or faulty on the lifter. Check the lifter on the following points before the operation.

CAUTION
DO NOT use lifter if any malfunction or faulty is found.

(1) Check scratch, bending or crack on the lifter.
(2) Check smooth movement of the wheels.
(3) Check if there is oil leakage.
(4) Check vertical creep of table.
(5) Check the function of brake.
(6) Check if all the bolts and nuts are tightened firmly.
(7) Check all the electric elements-battery indicator, horn, brake system whether to work normally

3.NAME OF PARTS



4. OPERATING LIFT TABLE


How to use the brake.

CAUTION
Brake lift table when not moving it in order to prevent sudden movement.

The brake is equipped with the swivel caster on the right side. (Only for ESF model),ESM model is equipped with fixed Support Brake unit.

(1) Braking the wheel, press the brake pedal.


(2) Releasing the brake, lift up the brake pedal.

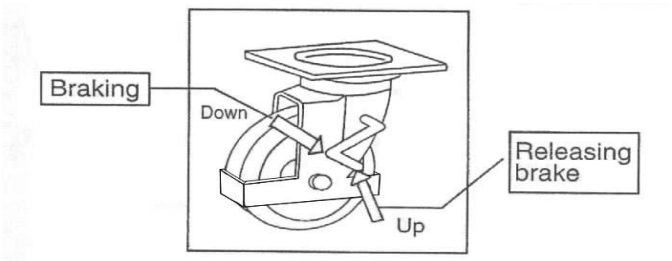

5. LIFTING UP FORKS

CAUTION
1. DO NOT overload lifter. Stay within its rated capacity. 2. Prolonged continous working might cause damage of hydraulic power pack. 3. Step operation if temperature of hydraulic oil is too high.

Push the button “UP” and the table lift up.

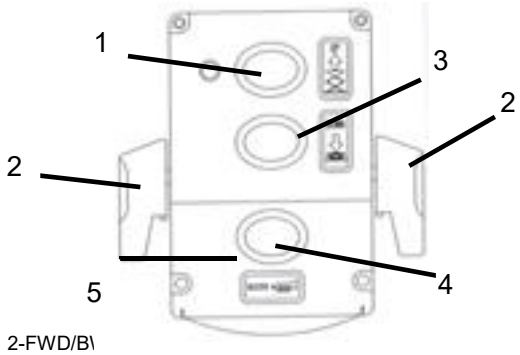

1-Switch for lifting 2-FWD/B\

3-Switch for lowering 4-Horn

5-Reverse Button

6.LOWERING TABLE

CAUTION
DO NOT lower table with load too fast and stop suddenly. Impact load could be created and lifter could be damaged.

Push the button DOWN.

7.MOVING THE LIFTER

WARNING
DO NOT move lifter on slope or inclined surface, otherwise lifter become uncontrollable and create danger.

(1) Make the load stable to prevent it to fall.

(2) Lower the table down.

(3) Release the brake and drive the lifter.

CAUTION
KEEP watching the condition of load. Stop operating lifter if load become unstable.

8.CHARGING THE BATTERY

TO charge the battery, follow these steps:


(1) Push the emergency switch to stop.

(2) Connect either the 240V or 110V lead(depending on mains supply) to the machine at the point shown.

(3) Connect the mains lead to a suitable power supply(either 110V or 240V).

(4) The battery should be fully recharged after a period of 10 hours, which is indicated by the 100% light illuminating on the battery charging indicator panel as shown.





9.REGULAR INSPECTION

Perform the regular inspection for the safety operation.

(1) Check the items expressed in daily inspection (daily).
(2) Lubricate with grease the guides where roller moves. Also, lubricate the grease nipples. (Every month)
(3) Lubricate all the pivoting points and axles. (Every 6 months)
(4) Replace the hydraulic oil for the first time: Accumulated working ten hours'
(5) Replace the hydraulic oil. (Every 12 months)

10.TROUBLE SHOOTING

TROUBLE	CAUSE	REPAIR
Platform do not rise while motor does not run.	1.Faulty wiring.	1.Check the wiring referring to the actual wiring diagram.
	2.Battery socket is disconnected	2.Connect the battery socket.
	3.Battery charge is insufficient.	3.Charge the battery.
Platform do not rise while motor runs.	1.Faulty adjustment of relief valve.	1.Adjust relief valve again.
	2.Faulty hydraulic pump.	2.Replace power pack.
	3.Shortage of hydraulic oil.	3.Add oil.
Vertical creep of table.	1.Oil leakage in power pack.	1.Replace lowering valve.
	2.Oil leakage form hydraulic circuit.	2.Check hydraulic circuit and repair.
Oil leakage from cylinder.	Faulty sealing.	Replace sealing.
Oil leakage from piping or joint.	Insufficient tightening or seal in valid.	Tighten joint again or Replace seal.
Oil leakage from air breather.	Excessive quantity of oil.	Reduce oil quantity.

11. SPECIFICATIONS

Model	ESSW50	ESSW50D	ESSW80	ESSW80D
Capacity (kg)	500	500	800	800
Table Size (LxW) mm	1045X610	1045X610	1045X610	1045X610
Platform Height (H1/H) mm	1015/485	1725/490	1075/485	1875/545
Stroke（mm）	230	1245	590	1330
Lifting Cycle	55	40	55	40
Time(Max. Lifting/Lowering) sec	10~18/16-24	20~28/20~28	12~20/16~24	22~30/13~21
Wheel (mm, D)	200	200	200	200
Overall Size(LxWxH) mm	1380X670X1165		1380X670X1165	
Net weight kg	226	273	264	316

Weighing Accuracy:


When table height is between H~ (H+ 40%Stroke) : accuracy is ±0.1%

When table height is more than (H+ 40%Stroke) : accuracy is ±0.2%

Suggestion: make the table at the lowest height for weighing

12. HYDRAULIC CIRCUIT/WIRING DIAGRAM/ACTUAL WIRING DIAGRAM

HYDRAULIC CIRCUIT



WIRING DIAGRAM

