

EPT15H 20H-75L-P (EPT33H 44H-3L-P)

LITHIUM PALLET TRUCK



24 HOURS
BUILT TO WORK


STAX 

SMART POWERFUL DURABLE

**BUILT TO
WORK
24
HOURS**

SMART SIZE

ALMOST SAME

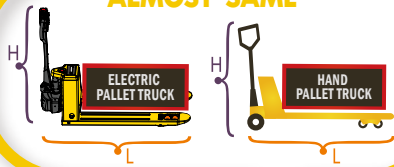

LIGHT WEIGHT




ONLY 125kgs

80 kgs

EFFICIENCY


3 Times Higher Than Manual Pallet Truck

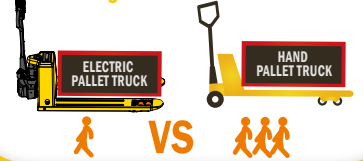

VS



EASY MAINTENANCE



LIFETIME


3 Times Longer Than Manual Pallet Truck



1 PC

VS

3 PCS

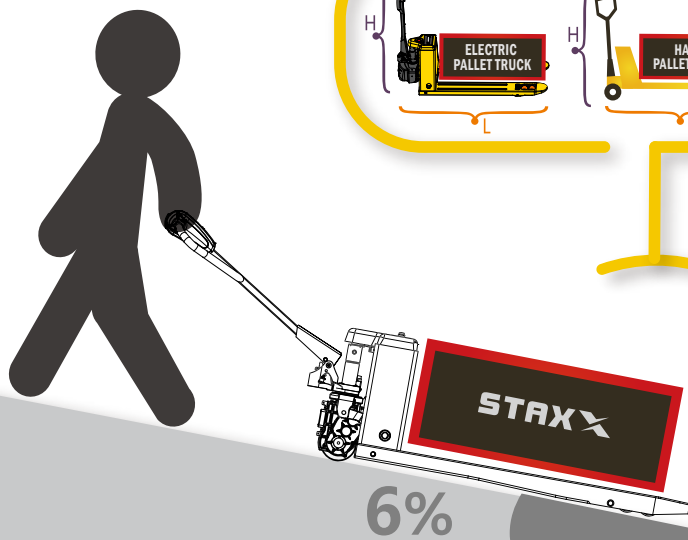

6%

HIGH RETURN OF INVESTMENT

Safety

PRODUCTIVE

1 MONTH COST
RECOVERY

Optimize
your operations
SAVE LABOUR
Brake any time anywhere

Release manpower

Powerful With High Gradeability



Unique brushless technology

Brushless motor, powerful and maintenance free.
Leading in the industry.



750W/1000W power
Brushless motor
Maintenance free



Powered traveling



Powered lifting & lowering

Maintenance free

For brushed motor, carbon brush needs to be replaced every 12 or 18 months.
For EPT15H, no need to replace carbon brush.
Maintenance-free, saving maintenance time and cost.

Powerful with high gradeability

To easily move 1.5 ton or 2 ton over the slopes at warehouse entrances.




Traveling speed



UNLADEN 4.5km/h



LADEN 4km/h



Gradeability



Non-stop Working

6s to replace battery

Maintenance-free lithium battery
It takes only 6s to replace battery.
With a spare battery, the unit can keep working 24 hours.

Ensured battery safety

Safe and reliable, no fire, no explosion.
Complying with IEC, UL global standard certification requirements,
ensuring the safety of user property.

- Long service life: lithium battery with a long service life.
- High safety performance: it adopts soft package battery technology, built-in protection board and multiple protection to eliminate overcharge and overdischarge.
- Maintenance free: no need to add water.

Short charging time Charge and use freely

Quick charging: 2 hours to fully charge the battery.



Compact and durable

Solid build, no breaking

Chassis made by solid materials, no bending, no deformation.
Reinforced rocker arm, push rod, wheel frame and support seat.
No plastic part, less damage.

Most compact unit with same lifting capacity

Suitable for small workplaces such as compact workshops,
trucks or vans, tail lifts or elevators.
EPT15H has the smallest turning radius among similar products.

Integral forks, no splicing

The forks are uniquely designed, easy to handle European
pallets, American pallets and plastic pallets.
Solid fork with no deformation, far more durable than other
brands of the same category.

**Solid build
No breaking**

Top cap thickness


6mm

V-block thickness

5mm

Fork thickness

4mm

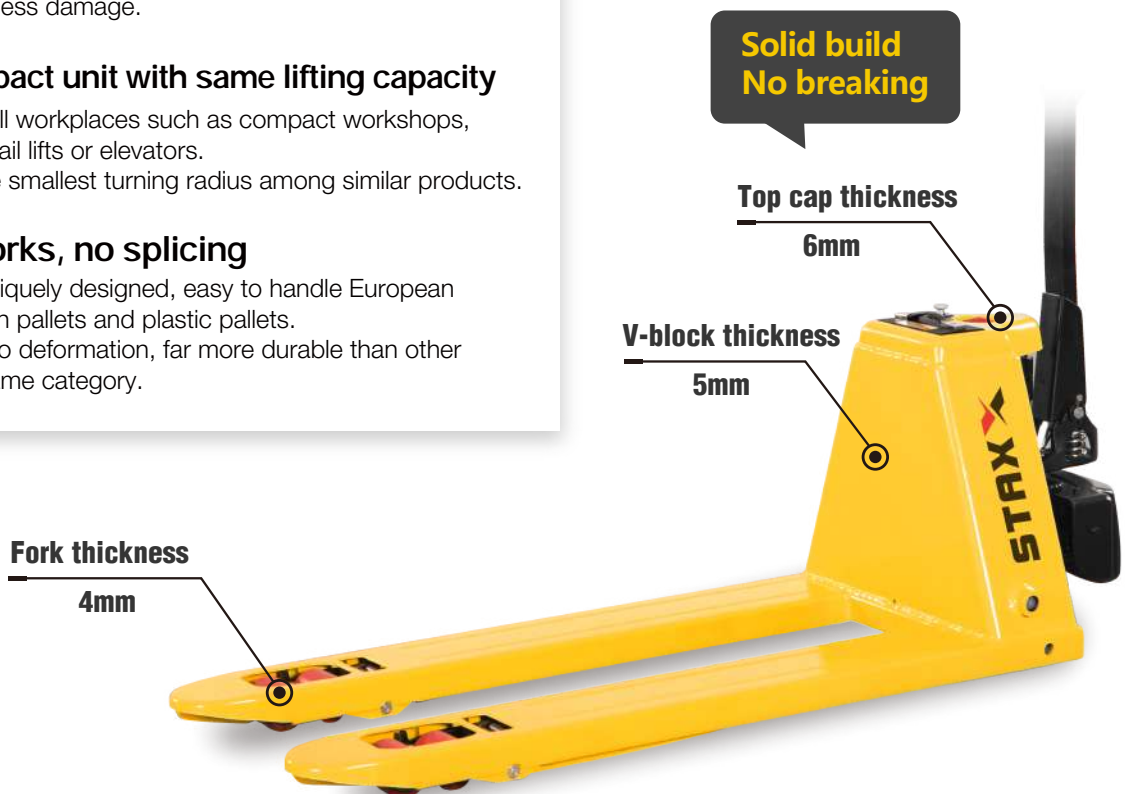

Intelligent Control

When you're moving heavy loads in tight spaces, maneuverability and controllability are critical to ensure safety, productivity and comfort.


The core concept of STAXX products is to make your job easier. With the ergonomically designed handle, EPT15H is easy to operate, reduces fatigue and improves work efficiency. Compared to other brands, users prefer to use STAXX EPT series.



Operator Preferred


Turtle Speed — 01

Press the turtle speed button




Up-Right Drive — 02

Keep holding the turtle speed button



⚠ Engineering Mode — 03

(Brake Release)
Horn Remains Pressed & Power On



- ⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.
- ⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

Comfortable Operation

Easy to operate
Ergonomic handle, comfortable to use.

Leading Technology

CanBus technology is applied on this entry-level electric pallet truck.

Fast And Slow Speed

To match different levels of operator experience, and varied work environments.

Up-right Drive Mode

Convenient to operate in vans, on tail lifts, or inside elevators.

Engineering Mode

When the unit breaks down, it can be moved away manually.



PIN access control

Features large display buttons while reducing the possibility of unauthorized use

- Recharge alert
- Hour meter
- Powered traveling
- Powered lifting & lowering
- Error code display
- PIN access control
- Emergency stop button
- Horn

Slope anti-sliding design

Easy parking on slopes, preventing accidental backing of the machine.

Easy Maintenance

EPT series utilizes STAXX's integrated diagnostics, error code display and STAXX's original service mini-program to facilitate quick problem resolution.

Easy parts replacement

The unique design makes disassembly and assembly simple, reducing machine downtime and operating costs.

- **1 minute**
Replace the drive wheel
- **1 minute**
Replace the handle
- **2 minutes**
Remove the controller
- **3 minutes**
Remove the motor



Error Code Display

Quickly identify the fault during operation.



Specialized service website & mini-program

Users can identify the fault based on the online troubleshooting videos. No limit on time, no limit on location. Easy access to the most professional solution to all possible truck failures.



Professional after-sales support

Specialist guidance is a phone call away.

Ready to Handle Multiple Jobs

With its unique design, EPT series is powerful and maneuverable to meet the application in a wide range of working conditions.



Warehouses/Logistics center



Truck tail lift



Supermarket

Pallet trucks are a necessary investment. Choosing the wrong machine could cause loss in productivity, high cost of machine downtime, unhappy workers, and overall, increased running costs. Choosing EPT series will reward you with long-term value.

STAXX EPT Series

- **Powerful**
- **Durable**
- **Easy maintenance**
- **Low use cost**
- **High return on investment**

Basic Configuration



Multi-function Handle

- Emergency reverse button
- Password key
- LCD Screen
 - Battery indicator with hour meter
 - Error code display
 - Recharge alert



- Forward/reverse butterfly switch
- Horn
- Lifting / Lowering



Lithium Battery




Intelligent charger



Tandem/Single PU wheel



Electric lifting/lowering



Protection cover
Anti-foot stamping
Protect the drive motor

Optional Configuration




**48V 15Ah battery
with bigger capacity**
Longer working hour



5A fast charger
Shorter charging hour



Wrapping film holder

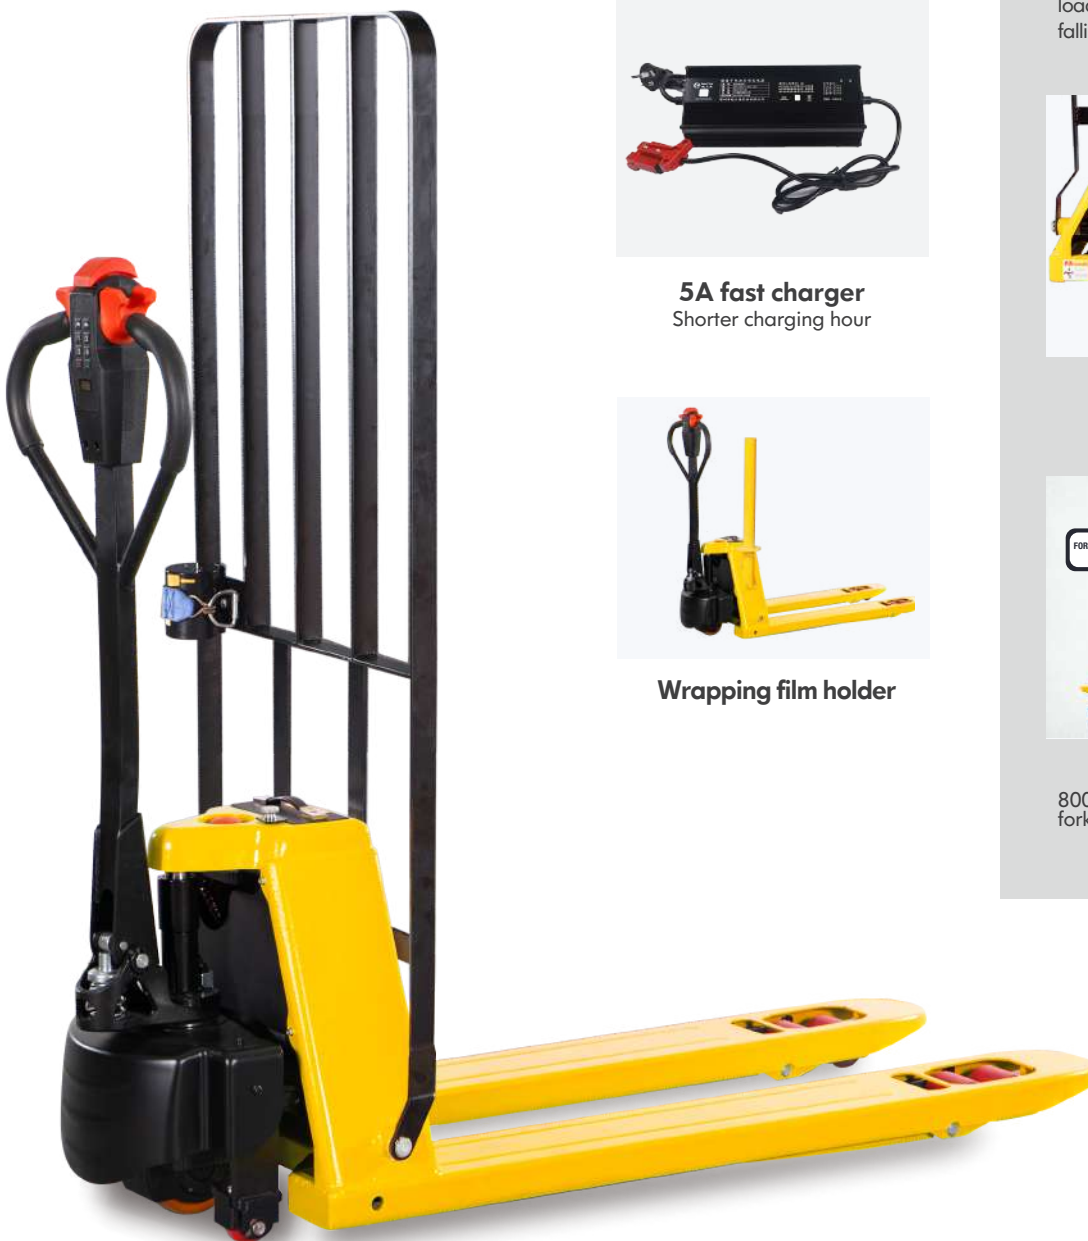

Load backrest
When goods are stacked high, the load backrest can prevent it from falling, ensuring user safety.





Balance wheel
Available on EPT33H



Fork length
800/900/1150/1220/1500mm
fork length options


Dimensions

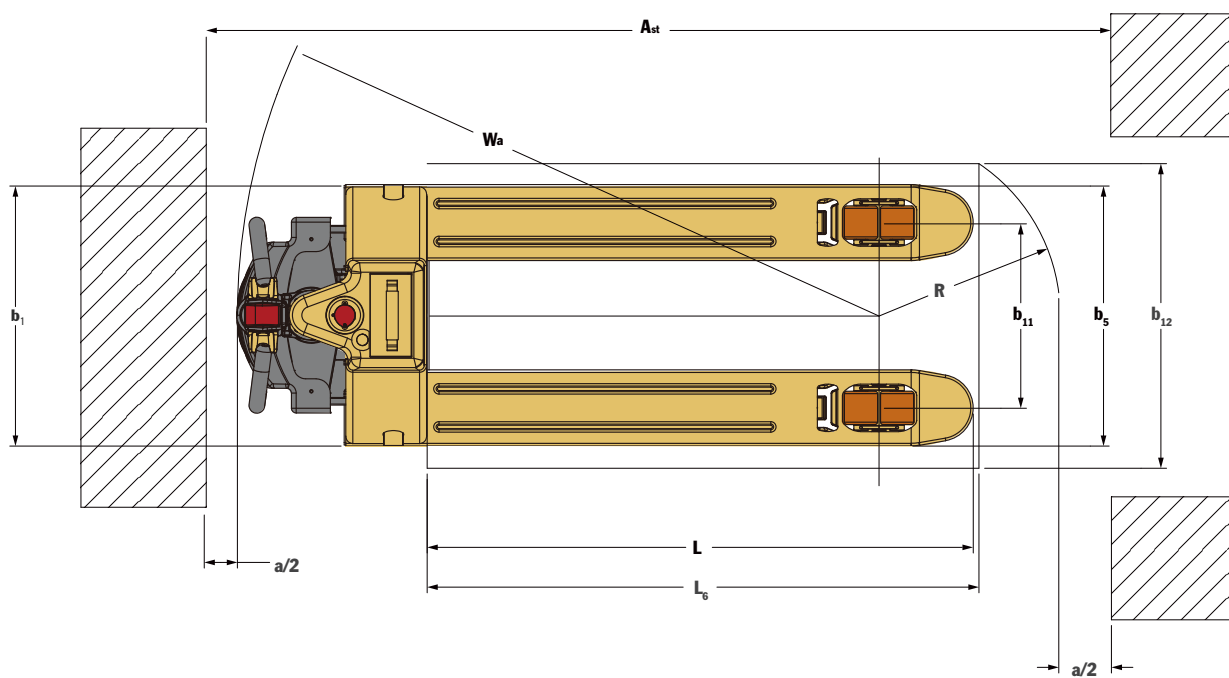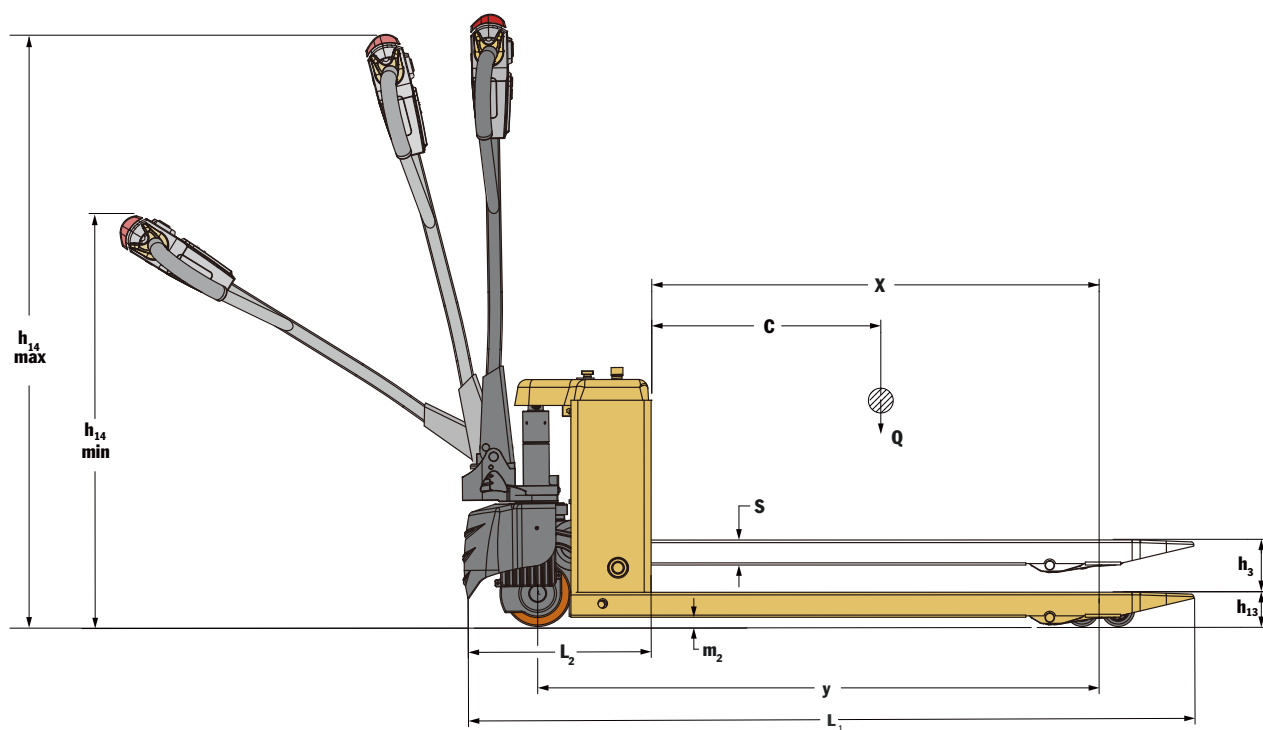

Specifications

MODEL				EPT15H-75L-P(EPT33H-3L-P)	EPT20H-75L-P(EPT44H-3L-P)
CHARACTERISTICS					
1.1	Drive			Electric	Electric
1.2	Operator type			Pedestrian	Pedestrian
1.3	Load capacity/rated load	Q	kg(lb)	1500(3300)	2000(4400)
1.4	Load centre	C	mm(in)	600(23.6)	600(23.6)
1.5	Height, fork lowered	h ₁₃	mm(in)	75 ± 2(2.9 ± 0.08)	75 ± 2(2.9 ± 0.08)
1.6	Wheelbase	y	mm(in)	1197/1267(47.1/49.9)	1197/1267(47.1/49.9)
1.7	Wheel			PU	PU
1.8	Wheel size, front		mm(in)	140*55(5.5*2.1)	140*55(5.5*2.1)
1.9	Wheel size, rear		mm(in)	70*93(2.7*3.7) (Single Wheel)	70*93(2.7*3.7) (Single Wheel)
			mm(in)	70*70 (2.7*2.7)(Tandem)	70*70 (2.7*2.7)(Tandem)
1.10	Wheels, number front/rear (x = drive wheels)			1x+2/4	1x+2/4
1.11	Lift	h ₃	mm(in)	115(4.5)	115(4.5)
1.12	Height of tiller in drive position, min./max.	h ₁₄	mm(in)	1250-800(49.2-31.5)	1250-800(49.2-31.5)
1.13	Overall length	L ₁	mm(in)	1552/1620(61.1/63.8)	1552/1620(61.1/63.8)
1.14	Fork Length	L	mm(in)	1150/1220(45.3/48)	1150/1220(45.3/48)
1.15	Overall width	b ₁	mm(in)	550/685(21.6/27)	550/685(21.6/27)
1.16	Fork dimensions		mm(in)	53*160*1150/1220(2.1*6.3*45.3/48)	53*160*1150/1220(2.1*6.3*45.3/48)
1.17	Distance between fork-arms	b ₅	mm(in)	550/685(21.6/27)	550/685(21.6/27)
1.18	Ground clearance, centre of wheelbase	m ₂	mm(in)	19.5(0.77)	19.5(0.77)
1.19	Aisle width for pallets 1000x1200 crossways	A _{st}	mm(in)	1718(67.6)	1718(67.6)
1.20	Aisle width for pallets 800x1200 lengthways	A _{st}	mm(in)	1687(66.4)	1687(66.4)
1.21	Turning radius	W _a	mm(in)	1353/1426(53.3/56.1)	1353/1426(53.3/56.1)
PERFORMANCE					
2.1	Travel speed, laden/unladen		km/h(mph)	4.0/5.0(2.5/3.1)	4.0/5.0(2.5/3.1)
2.2	Lifting speed, laden/unladen		mm/s(ft/min)	18/23(3.54/4.53)	18/23(3.54/4.53)
2.3	Lowering speed, laden/unladen		mm/s(ft/min)	56/46(11/9)	56/46(11/9)
2.4	Max. gradeability, laden/unladen		%	6%/20%	6%/20%
2.5	Drive motor		kW	DC 0.75 Brushless	DC 1.0 Brushless
2.6	Lift motor		kW	DC 0.8	DC 0.8
BATTERY					
3.1	Battery voltage/nominal capacity		V/Ah	48V/10Ah(48V/15Ah)	48V/10Ah(48V/15Ah)
3.2	Traveling brake			Regenerate	Regenerate
3.3	Brake			Electromagnetic	Electromagnetic
3.4	Sound level at the driver's ear according to EN 12053		A	< 70dB	< 70dB
3.5	Service weight including battery		kg(lb)	110/115(242.5/253.5)	111.5/116.5(245.8/256.8)

| MAKE
YOUR JOB
EASIER!

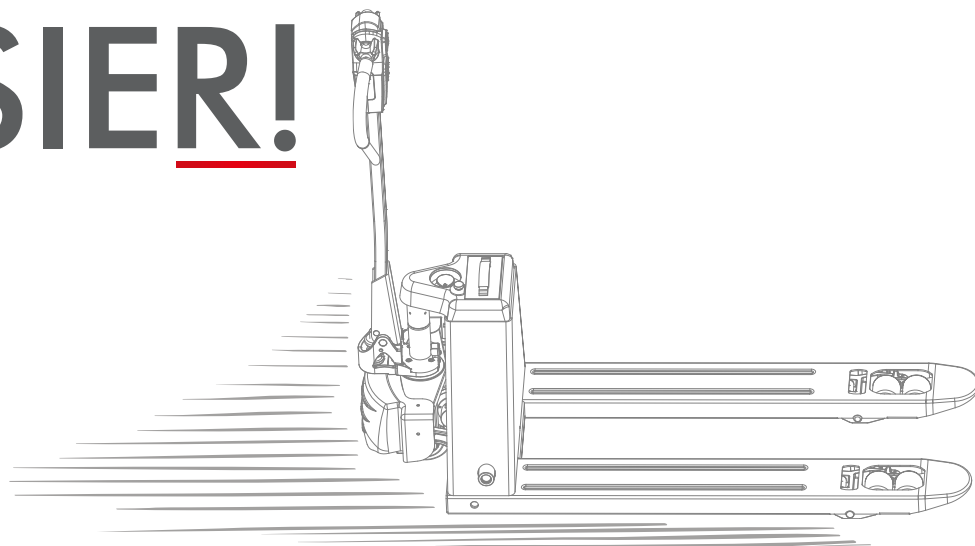

NINGBO STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

Email: info@cnmhe.com

Tel : +86-574-8921-7230

Web: www.staxxmhe.com

Fax: +86-574-8921-7240

Add: FIRST FLOOR, NO.10 BUILDING, NO.688 JINDA ROAD,
YINZHOU DISTRICT, NINGBO